



Input Eingang Indgang	Sensitivity for 15 W Empfindlichkeit für 15 W Følsomhed for 15 W	Input Impedance-1 kHz Eingangsimpedanz-1 kHz Indgangsimpedance-1 kHz	S/N Ratio 15 W S/R Forhold 15 W
1	60 mV	47K Ohm	60 dB
2	60 mV	47K Ohm	60 dB
MAGNET	3 mV	47K Ohm	50 dB
CRYSTAL	500 mV	1M0 Ohm	60 dB
(3&5)	120 mV	0M1 Ohm	60 dB

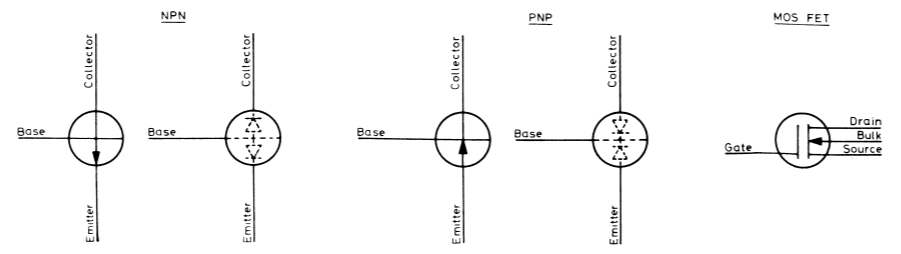

SOCKET CONNECTIONS
Seen from the rear side
of socket

SOCKETVERBINDUNGEN
Anschlüsse von der
Rückseite gesehen

SOKKELFORBINDELSER
Set mod bund af sokkel

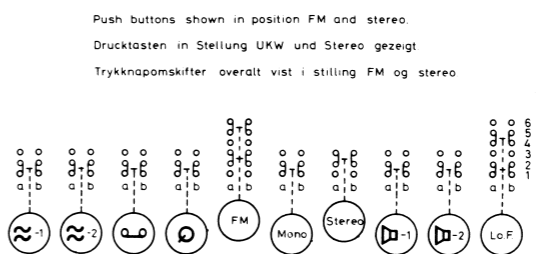

Recommended impedance for stereoeophone: 400 Ohm, e.g. Beyer DT 96 A
Empfohlene impedanz for Stereokøphører: 400 Ohm, z.B. Beyer DT 96 A
Anbefalet impedans for stereohøvedtelefon 400 Ohm, f.eks. Beyer DT 96 A

ARENA
TYPE T 2700
HEDE NIELSEN 76
8700 HORSBENS - TLF. 06-624711
4 87 5262 Juni 1968