

TONE SIGNALING
TEST GENERATOR

TS - G13


U95 B0251

Storno

TONE SIGNALING TEST GENERATOR

TS - G13


U95B0251

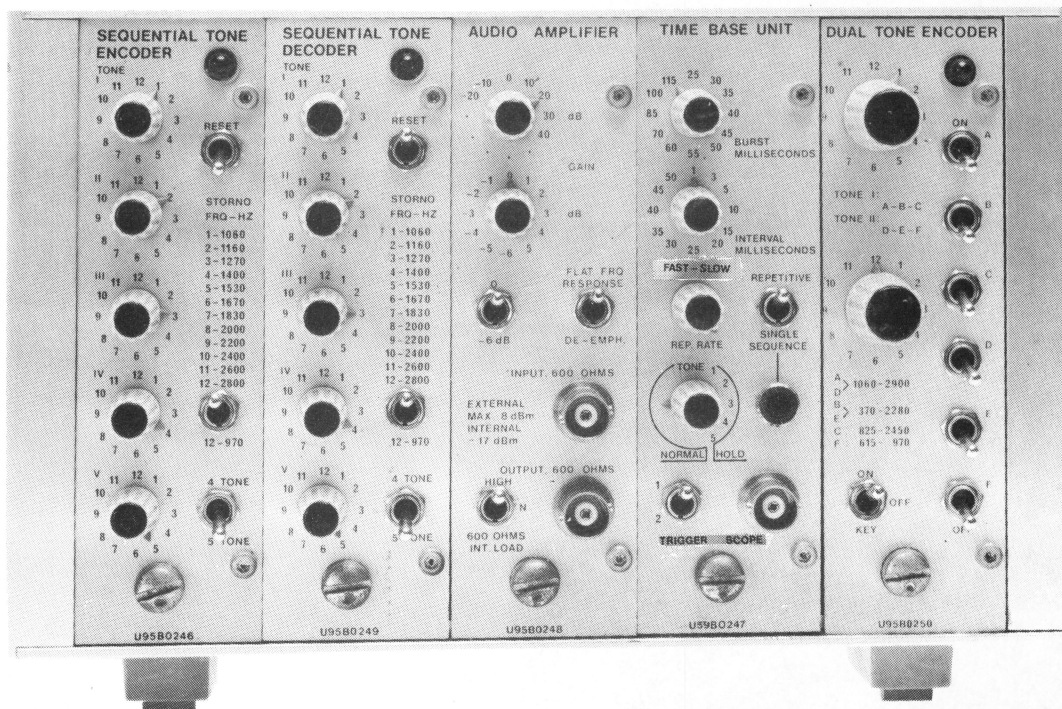

CONTENTS	No.
Functional Diagram	D401.936
Description	60.214
Specifications	60.213
Service Notes	60.215
Plug-in Units	
Sequential Tone Encoder	U95B0246
Schematic Diagram	D506.418
Parts List	X401.898
Component Layout	D505.997/3
Sequential Tone Encoder (CCIR)	U95B0284
Schematic Diagram	D507.179
Parts List	X401.913
Component Layout	D505.997/4
Time Base Unit	U95B0247
IC Pin Location	D506.503
Timing Diagram	D401.935
Schematic Diagram	D506.502
Component Layout	D506.068
Parts List	X401.899
Audio Amplifier	U95B0248
Schematic Diagram	D506.431
Parts List	X401.900
Component Layout	D505.996
Sequential Tone Decoder	U95B0249
Schematic Diagram	D506.411
Parts List	X401.911
Component Layout	D506.030
Parts List (SR685)	X400.285
Dual Tone Encoder	U95B0250
Schematic Diagram	D506.466
Component Layout	D506.029
Parts List	X401.912
Mainframe	
Power Supply	U95B0245
Schematic Diagram	D506.436
Parts List	X401.897
Component Layout	D506.114

TONE SIGNALING TEST GENERATOR

TS - G13

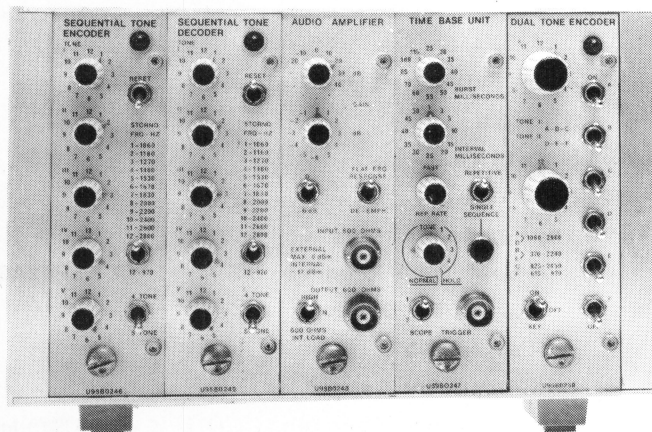

ABOUT STORNO'S G13 TONE SIGNALING TEST GENERATOR

The G13 Test Generator consists of a main-frame with an independent power supply operating from a 220 or 240 V, 50 Hz mains and a loudspeaker for aural monitoring of tones as they are processed by the G13. A back-panel switch, next to the speaker grille, turns the speaker on and off.

The standard version of the G13 Test Generator includes five plug-in modules :

U95B0246	Sequential Tone Encoder
U95B0247	Time Base Unit
U95B0248	Audio Amplifier
U95B0249	Sequential Tone Decoder
U95B0250	Dual Tone Encoder


You need only this one special-purpose instrument in addition to the usual test instruments that you already have on your shop bench and you are adequately equipped to make any performance check on all Stornophone 600, 700, and 800 standard tone equipment. More important, you will be sure of what you are measuring, precise levels and accurate, stable frequencies instantly selected by the setting of a switch — none of the uncertainty which so often results in costly, annoying call-backs.

To test tone receivers using CCIR tones, as is the case with many mobile units operating over public carrier systems, all you need to do is slide any unused module out of the mainframe and in its place plug in a U95B0284 CCIR Sequential Tone Encoder.

Another feature of the G13 is its versatility. Any plug-in can be inserted in any of the five connector positions. This means that for service organisations having other, special requirements the G13 mainframe can be outfitted with any combination of modules desired.

Several instruments can be grouped together in a rack system, as it is possible to order a modified version of the G13 mainframe that fits right into a standard 19" rack. This will easily double the capacity of each mainframe; each plug-in takes up only 1 1/2" of rack width (front panel height is 5").

Talk with Storno's service advisers or with our instrument laboratory to determine just how Storno's programme of specially-developed instruments, many of which cannot economically be substituted by other commercially available equipment, can enhance the reliability of your service facility.

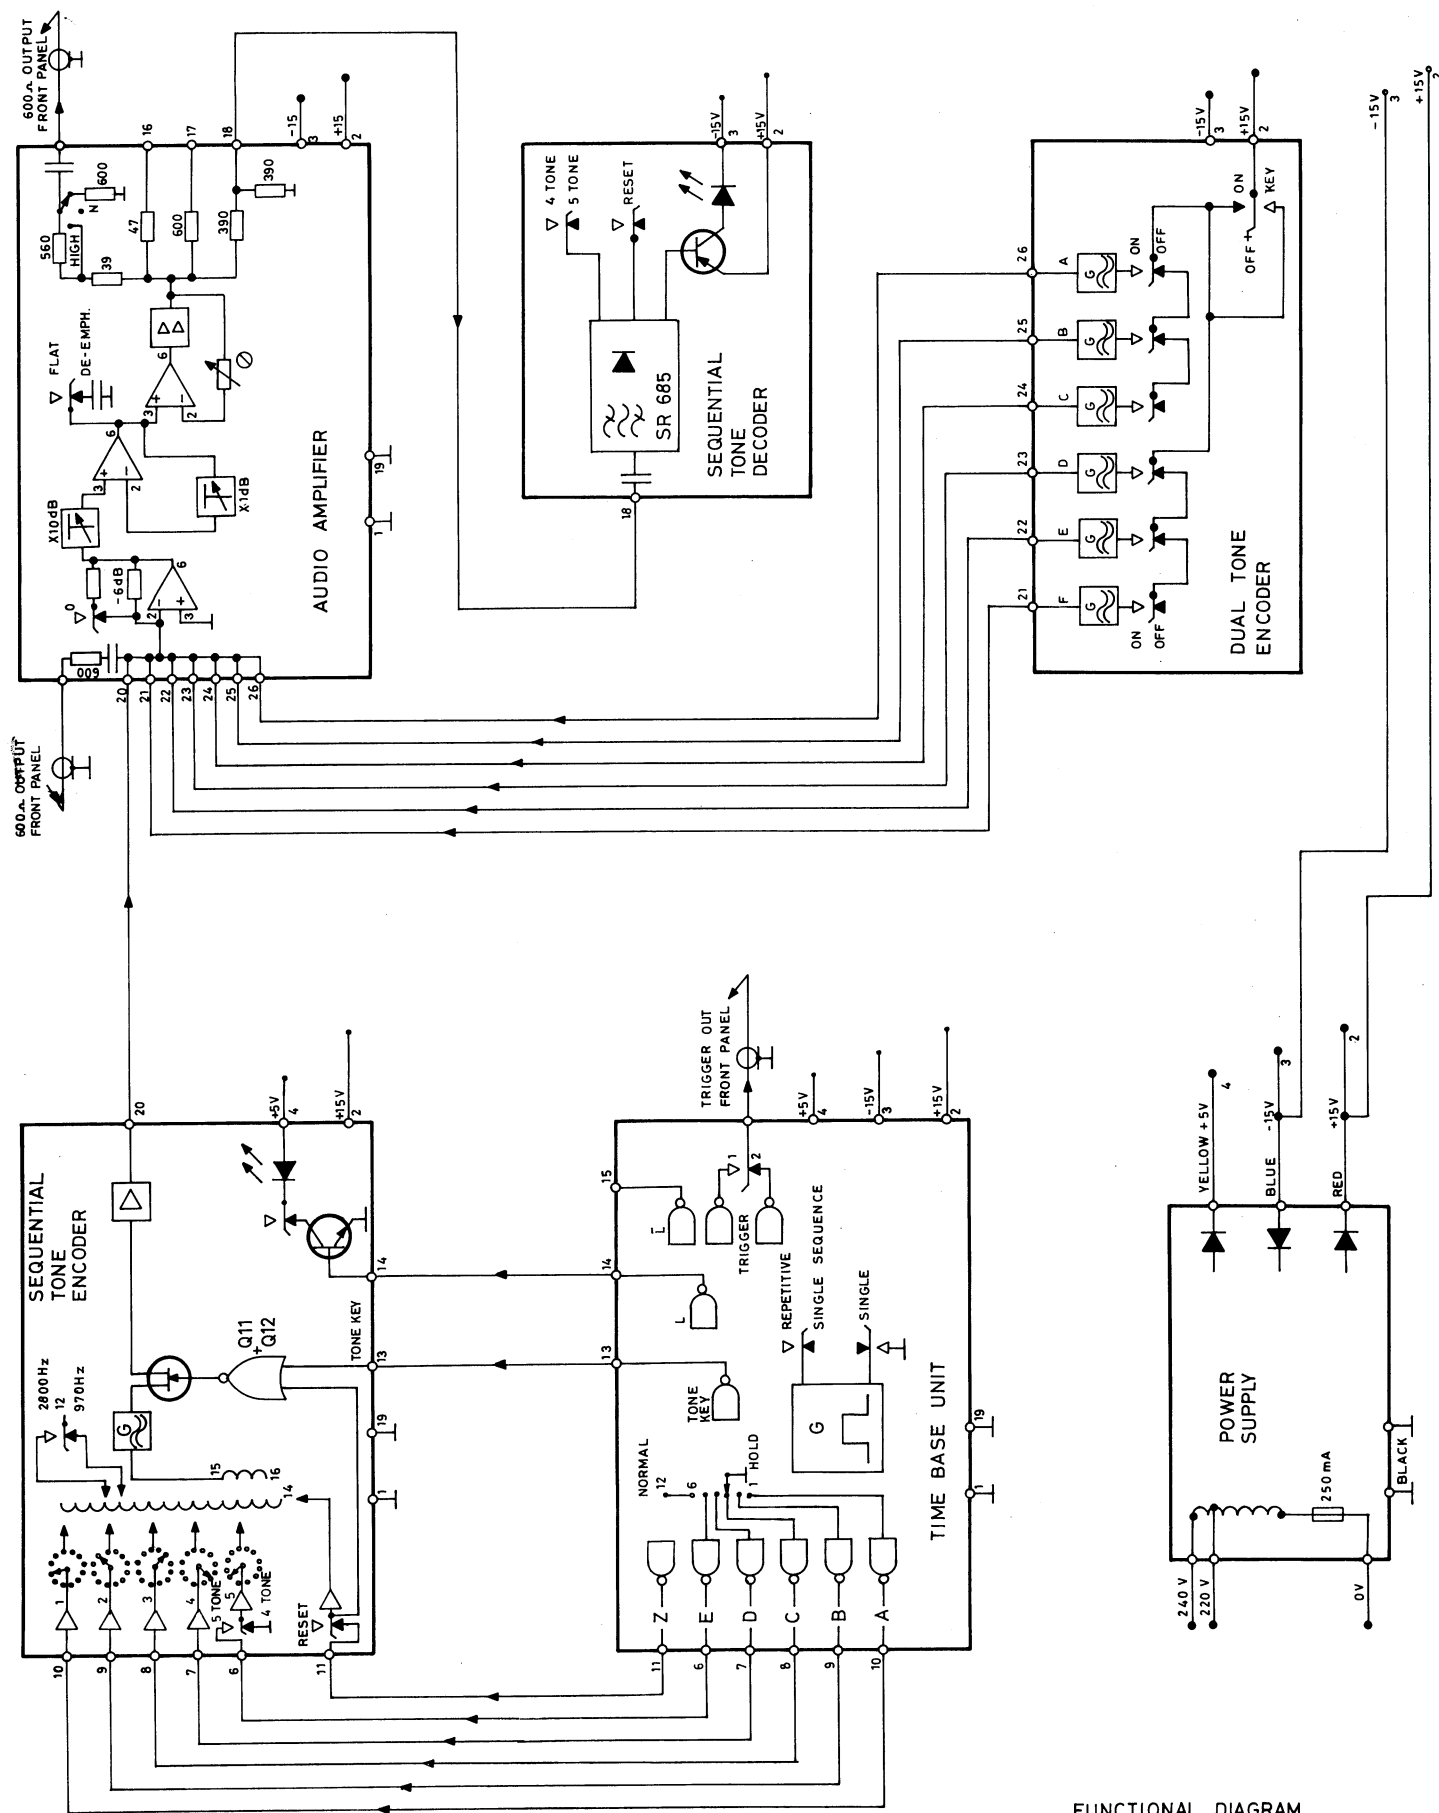

FUNCTIONAL DIAGRAM
TS-G13 U95B 0251

D401.936

TONE SIGNALING TEST GENERATOR

TS - G13

GENERAL DESCRIPTION

Purpose

Tone signaling systems for selective calling and identification call for specialized test equipment that is not generally available. Now Storno has combined the most necessary test equipment in a handy unit designed for servicing and repair work on tone systems.

Range

The unit will test

- Dual (and single) tone burst decoders
- Sequential tone burst encoders
- Sequential tone burst decoders

For technical details, see specifications.

General

The Tone Signaling Test Generator is housed in a light-weight, half rack-width aluminium cabinet fitted with a tilt up stand. The self-contained power supply is mounted on the rear panel, the fixed line cord protruding through this. The cabinet front opening accepts five plug-in units (any plug-in fits into any position).

Functional

Units

1. SEQUENTIAL TONE BURST ENCODER (S/N U95B0246)

Any 4- or 5-tone code using the Storno tone system frequencies (CCIR also available; CCIR unit: S/NU95B0284) can be set up with five front panel 12-position switches. The encoder's oscillator is controlled by the Time Base Unit and the audio is available at the output connector of the Audio Amplifier. With 4-tone systems (toggle switch to 4-tone pos.) only tones no. 1 to 4 are operable. Two different frequencies can be selected as tone no. 12.

2. TIME BASE UNIT (S/N U95B0247)

This basic plug-in unit controls timing and general operation of the Sequential Tone Encoder. Separate panel controls for tone burst duration and interval between bursts allow precise timing for checking the critical integrating and resetting time constants of the sequential tone decoder under test. Single or repetitive burst trains are available with front panel control of repetition rates. A trigger pulse for an oscilloscope is available at a front panel connector. The operator may choose between two different time delays for start of burst train after triggering.

For static tests any of the five pre-programmed tones of the Sequential Encoder can be selected by turning the NORMAL - HOLD switch to a HOLD tone no. position.

3. AUDIO AMPLIFIER (S/N U95B0248)

This basic plug-in unit has input and output connectors for the audio signals on the front panel. Internally generated signals go to a summing amplifier, which also connects to the external input through a 600 ohm resistor. Thus internally and externally generated signals can be mixed without interaction. Note, that all plug-in decoders are permanently connected internally to the amplifier output in such a way that external loads will not disturb the signal level at this point. Gain controls with steps of 10 dB and 1 dB allow a wide range of input and output levels to be used. A toggle switch normally set to 0 dB reduces gain by 6.0 dB for checking of sensitivity margin of decoders.

Another switch selects either flat frequency response or standard de-emphasis, i.e. a simple low-pass RC filter with $f_c = 1$ kHz and a slope of 6 dB per octave, ultimately.

Max. undistorted output is +20 dBm (20 V_{pp}), obtained with the output switch in "HIGH", where the internal impedance is 40 ohms. With the output switch in the medium position, N, max. output is 20 V_{pp} behind 600 ohms, corresponding to +10 dBm relative to 600 Ω. The bottom position connects an internal load resistor of 600 ohms across the output (used when testing decoders with high impedances).

Input impedance is 600 ohms and max. input level is +8 dBm.

4. SEQUENTIAL TONE BURST DECODER (S/N U 95 B0249)

This unit accepts 4 or 5-tone sequential tone burst codes according to the Storno or ~~CCIR~~ System. The panel controls are the same as on the corresponding Encoder. When a signal of correct coding and acceptable level is applied a red light on the front panel will go on. The decoder is reset automatically after approx. 1 second or 10 seconds, as selected by front panel control.

The encoder has a built-in pre-emphasis network corresponding to the one described under "audio amplifier". The nominal sensitivity (minimum triggering level) is +3 dBm with a safety margin of 6 dB.

The decoder uses a slightly modified Storno sub-unit (SR685).

5. DUAL TONE ENCODER (S/N U 95B0250)

This unit uses six oscillators arranged in two groups. One out of up to twelve frequencies can be selected by a front panel switch for each group. Oscillators, A, B, C, belonging to the upper selector switch and D, E, F, belonging to the lower switch, are activated by a bank of toggle switches. Only two oscillators can be on at the same time. Manual keying is used and output is indicated by the red panel light.

Note!

Output level from each oscillator to the audio amplifier input is -17 dBm. To obtain correct level for a dual tone signal the gain must be reduced 6 dB.

Frequencies no. 1 to 12:

- A - 1060, 1160, 1270, 1400, 1530, 1670, 1830, 2000, 2200, 2400, 2600, 2900 Hz (Storno Standard);
- B - 370, 450, 550, 675, 825, 1010, 1240, 1520, 1860, 2280 Hz;
- C - 825, 1010, 1240, 1435, 1520, 1750, 1860, 1980, 2000, 2135, 2280, 2450 Hz;
- D - same as A (Storno Standard);
- E - same as B;
- F - 615, 675, 735, 805, 885, 970 Hz (Storno Extended).

Note!

The sequential burst frequencies are the same as A, except for tone no. 12 which may be 2800 or 970 Hz.

TONE SIGNALING TEST GENERATOR

TS - G13

SPECIFICATIONS

TIME BASE UNIT U95B0247

Pulse Sequence Timing

(variable in 12 steps)

<u>Tone Bursts</u>	<u>Intervals</u>
25 ms	1 ms
30 ms	3 ms
35 ms	5 ms
40 ms	10 ms
45 ms	15 ms
50 ms	20 ms
55 ms	25 ms
60 ms	30 ms
70 ms	35 ms
85 ms	40 ms
100 ms	45 ms
115 ms	50 ms

Pulse Trains Available

(single mode or repetitive mode)

Single sequences: triggered manually from a front panel push button.

Repetitive sequences: repetition rate variable between 400 ms and 2 s by means of a front panel control.

DUAL TONE ENCODER U95B0250

Oscillator Frequencies (in Hz)

<u>A, D</u>	<u>B, E</u>	<u>C</u>	<u>F</u>
1060	370	825	615
1160	450	1010	675
1270	550	1240	735
1400	675	1435	805
1530	825	1520	885
1670	1010	1750	970
1830	1240	1860	
2000	1520	1980	
2200	1860	2000	
2400	2280	2135	
2600		2280	
2900		2450	

Frequency Accuracy

With Tone 1 adjusted to <0.5% accuracy, all tones will be accurate to 1%.

Output level

-17 dBm

Distortion

< 3%

POWER SUPPLY UNIT U95B0245

Line Voltage

220 V or 240 V +10% / -20%

Output Voltages

+15 V \pm 0.5 V	280 mA max.
-15 V \pm 0.5 V	280 mA max.
+ 5 V \pm 0.25 V	400 mA max.

SEQUENTIAL TONE DECODER U95B0249

Tone FrequenciesStorno Std.

970 Hz
1060 Hz
1160 Hz
1270 Hz
1400 Hz
1530 Hz
1670 Hz
1830 Hz
2000 Hz
2200 Hz
2400 Hz
2600 Hz
2800 Hz

Frequency Stability

Better than $\pm 1\%$

AUDIO AMPLIFIER U95B0248

Attenuation

Coarse: -20 dBm to $+40 \text{ dBm}$
in 7 steps of 10 dBm each

Fine: -6 dBm to $+5 \text{ dBm}$
in 12 steps of 1 dBm each

Plus one step of -6 dBm for testing
marginal sensitivity values.

Input

Ext. input impedance: $600 \Omega \pm 1\%$
Int. input impedance: app. 0Ω
Ext. input sensitivity: max. $+8 \text{ dBm}$
Int. input sensitivity: max. -17 dBm

Output

Ext. output impedance: $600 \Omega \pm 1\%$
Int. output impedance at pin 18: $390 \Omega \pm 1\%$
Int. output impedance at pin 17: $600 \Omega \pm 1\%$
Int. output impedance at pin 16: $47 \Omega \pm 5\%$

Frequency Response

Choice of flat response or
 $6 \text{ dBm} / \text{octave}$ ($f_c = 1000 \text{ Hz}$)

SEQUENTIAL TONE ENCODER U95B0246

Tone Sequence Signal

4 or 5 tone sequences (tone duration and interval determined by signals from Time Base Unit)

Tone FrequenciesStorno Std.

970 Hz
1060 Hz
1160 Hz
1270 Hz
1400 Hz
1530 Hz
1670 Hz
1830 Hz
2000 Hz
2200 Hz
2400 Hz
2600 Hz
2800 Hz

Frequency Stability

Better than 1%

SEQUENTIAL TONE ENCODER U95B0284

Tone Sequence Signal

4 or 5 tone sequences

Tone FrequenciesCCIR

1124 Hz
1197 Hz
1275 Hz
1358 Hz
1446 Hz
1540 Hz
1640 Hz
1747 Hz
1860 Hz
1981 Hz
2110 Hz

Frequency Stability

Better than 1%

tone signaling test generator

TS - G13

SERVICE NOTES


SERVICE BOARD U95B0378

In order to service individual plug-in units properly, some means of operating the modules outside of the mainframe is necessary.

The Service Board, S/N U95B0378, is one good way of accomplishing this. The Service Board

plugs into the mainframe in place of the module to be tested, and the module can then be plugged into the protruding end of the Service Board.

In addition, solder lugs on the PCB allow an extension cable and connector to be fitted where more flexibility is desired.

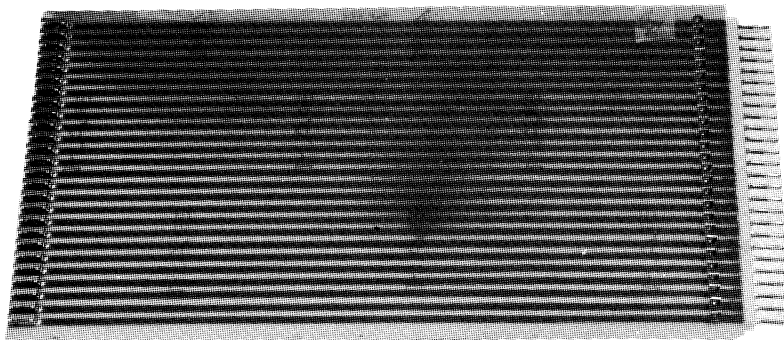

POWER SUPPLY UNIT U95B0245

The design of the power supply with its three supply lines (+15V, -15V, and +5V) was kept simple by utilizing three integrated 5-volt regulators, LM309K. Each regulator is rated for an available output current in excess of 1 A and incorporates current limiting features to keep the output current within a safe value and automatic thermal shutdown to prevent overheating.

LM309K comes in a TO-3 package, the case is the negative lead (normally ground). To regulate the +15V supply the case should be at approximately +10V, and for the -15V supply the case would be at -5V potential, as measured from the system ground.

R_{adj} , two resistors of about 3.3 k Ω value each, parallel R_2 and R_4 and are used to adjust for correct output voltages on the +15V and -15V lines, respectively.

AUDIO AMPLIFIER U95B0248

Input buses 20, 21, 22, 23, 24, 25, and 26 are all tied together and brought to the input of the first Operational Amplifier, IC1. There is no interference or cross talk between the various input loads as they all look into a virtual short circuit at the Op Amp inverting input.

Notice that any input signal at this point will consist of a current applied to approx. zero im-

pedance. Therefore, no observable voltage can be expected at the input of the Op. Amp.

With the frequency response switch, SW4, set for FLAT FREQ. RESPONSE the gain of the Audio Amplifier will be the sum of the settings of SW1, SW2, and SW3. For instance:

with S1 set at 0
and S2 set at -10
and S3 set at +3
Amplifier gain = -7 dB

TESTING THE AUDIO AMPLIFIER:

TEST FOR	SET PANEL CONTROLS	CORRECT RESULT	TEST POINT	CORRECTION
DC OFFSET	SW2 one position counter-clockwise from the -20 dBm position (input grounded)	0 V \pm 0.1 V	BUS 16	Adjust with R14
no input signal				
GAIN	SW1, 2, 3 to 0 dBm	110 mV rms (-17 dBm)	OUTPUT 600 OHM connector	Adjust with R48
test signal 110 mV rms, 1000 Hz to INPUT connector	SW4 to FLAT FRQ. RESPONSE SW5 to 600 OHMS INT. LOAD			
DE-EMPHASIS slope $f_c = 1000$ Hz	SW1, 2, 3 to 0 dBm SW5 to 600 OHMS INT. LOAD	Output amplitude should remain unchanged at 110 mV rms (-17 dBm)	OUTPUT 600 OHM connector	Poor test result indicates that C4 (47 nF 2%) is faulty
input signal 110 mV rms, 1000 Hz	SW4 to DE-EMPH. position			
DISTORTION	SW4 in either position	20 V pp undistorted output signal (observe with oscilloscope)	OUTPUT 600 OHM connector	Poor test result indicates faulty transistors Q1 / Q2
input signal 110 mV rms, 1000 Hz	SW5 to HIGH Adjust SW1, 2, 3 to increase output signal until clipping occurs (should be symmetric). Then back down to obtain the greatest, undistorted amplitude possible.			

TIME BASE UNIT ADJUSTMENTS			
Function	Control Set-up	Adjust	Requirement
Tone Burst Duration Time	SW6 to 100 ms	P1	Clock HIGH for 100 ms
	SW6 to 25 ms	P3	Clock HIGH for 25 ms
Repeat above adjustments until settings of both P1 and P3 are accurate.			
Tone Burst Interval Time	SW5 to 50 ms	P4	Clock LOW for 50 ms
	SW5 to 1 ms	P2	Clock LOW for 1 ms
Repeat above adjustments until settings of both P2 and P4 are accurate.			
Repetition Rate	P5 (front panel) fully counterclockwise fully clockwise	P5	400 ms \pm 100 ms between pulse trains 2 s \pm 500 ms between pulse trains
If REP. RATE is out of tolerance check values of C7 and C8 (68 μ F 20%).			

ADJUSTING DUAL TONE ENCODER OUTPUT LEVELS			
NOTE: For proper results, the Audio Amplifier must be accurately adjusted.			
TEST SET-UP		ADJUSTMENT	REQUIREMENT
Audio Amplifier	Dual Tone Encoder		Audio Amplifier Output
For all tests	Switch ON one at a time	If necessary, adj. pot.	Measure w/AC Voltmeter
SW2 to +20 dBm	A	T1	0 dBm (774.6 mV rms)
SW3 to - 3 dBm	B	T2	
SW1 to 0 dBm	C	T3	
SW4 to FLAT	D	T4	
SW5 to 600 OHM	E	T5	
INT. LOAD	F	T6	

ADJUSTING THE SEQUENTIAL TONE ENCODER					
NOTE: For proper results, the Audio Amplifier must be accurately adjusted.					
PLUG-IN UNIT	Set Controls for:		Requirement	Adjustment	
Time Base Unit	SW7 to HOLD 1		Make all measurements w/AC Voltmeter at Audio Amplifier Output Connector	Once set, controls on Time Base Unit and Audio Amplifier remain untouched throughout following tests	
Audio Amplifier	SW2 to +20 dBm SW3 to − 3 dBm SW1 to 0 dBm SW4 to FLAT SW5 to 600 OHM INT. LOAD				
Sequential Tone Encoder U95B0246 (Storno Std.)	a.	SW1 to 1400 Hz	0 dBm	If necessary, adjust R20	
	b.	SW1 to pos. 12 SW7 to 12=970 Hz	0 dBm ±0.3 dBm	Tolerance check	
	c.	SW1 to pos. 12 SW7 to 12=2800Hz			
Sequential Tone Encoder U95B0284 (CCIR)	a.	SW8 to FLAT SW1 to 1540 Hz	0 dBm	If necessary, adjust R20	
	b.	SW8 to PRE-EMPH. SW1 to 1540 Hz	Output should remain unchanged at 0 dBm	Pre-emphasis slope test. Adjustable with R35 (check tolerance of C12)	
	c.	SW8 to FLAT SW1 to 1124 Hz	0 dBm ±0.3 dBm	Tolerance check	
	d.	SW8 to FLAT SW1 to 2110 Hz			

Storno

TYPE	NO.	CODE	DATA
R 1	80.5249	Resistor carbon film	1 k Ω 5% 1/8W
R 2-7	80.5257	Resistor carbon film	4.7 k Ω 5% 1/8W
R 8	80.5247	Resistor carbon film	680 Ω 5% 1/8W
R 9	80.5258	Resistor carbon film	5.6 k Ω 5% 1/8W
R 10	80.5250	Resistor carbon film	1.2 k Ω 5% 1/8W
R 11	80.5230	Resistor carbon film	27 Ω 5% 1/8W
R 12	80.5247	Resistor carbon film	680 Ω 5% 1/8W
R 13	80.5265	Resistor carbon film	22 k Ω 5% 1/8W
R 14	80.5267	Resistor carbon film	33 k Ω 5% 1/8W
R 15	80.5272	Resistor carbon film	82 k Ω 5% 1/8W
R 16	80.5270	Resistor carbon film	56 k Ω 5% 1/8W
R 17	80.5270	Resistor carbon film	56 k Ω 5% 1/8W
R 18	80.5246	Resistor carbon film	560 Ω 5% 1/8W
R 19	80.5258	Resistor carbon film	5.6 k Ω 5% 1/8W
R 20	86B5042	Trimmer potentiometer	10 k Ω
R 21	80.5249	Resistor carbon film	1 k Ω 5% 1/8W
R 22	80.5236	Resistor carbon film	82 Ω 5% 1/8W
R 23	80.5258	Resistor carbon film	5.6 k Ω 5% 1/8W
R 24	80.5273	Resistor carbon film	100 k Ω 5% 1/8W
R 25	80.5284	Resistor carbon film	820 k Ω 5% 1/8W
R 26	80.5284	Resistor carbon film	820 k Ω 5% 1/8W
R 27	80.5249	Resistor carbon film	1 k Ω 5% 1/8W
R 37	80.5446	Resistor carbon film	560 Ω 5% 1/4W
R 38	80.5239	Resistor carbon film	150 Ω 5% 1/8W
C 1	76.5068	Capacitor polystyr	0.1 μ F 1%
C 2	76.5070	Capacitor polystyr	10 nF
C3-10	73.5109	Capacitor tantal	10 μ F 16 V
C 13		Capacitor tantal	68 μ F
L 1	61.1140	Tone Coil, Storno frequencies	
Q1-3	99.5121	Transistor BC107	
Q4-9	99.5144	Transistor BC214L	
Q10-12	99.5121	Transistor BC107	
Q 13	99.5204	Transistor 2N4303	
D 1	99.5209	Stab. diode	ZE 1.5
D 2	99.5009	LED diode	HP 5082-4440
D 3	99.5114	Zener diode	5.6 V
IC 1	14B5022	SN7404N Integrated circuit	


Storno

TYPE	NO.	CODE	DATA
	SW 1 to SW 5	47.5047 49.5027 49.5028 49.5029 47B5031 47B5028	Rotary Switch ELMA Knob for switch Cap Insert for knob Pointer for knob Toggle Switch Toggle Switch
	SW 6 SW7,8	41B5026	Receptacles (AMP)
		37B0011 20B5031 24B5001 28B5003	Module Locking Cam Screw for above Washer for above Retaining Pin for above

SEQUENTIAL TONE ENCODER U95B0246

X401.898

FS-G13

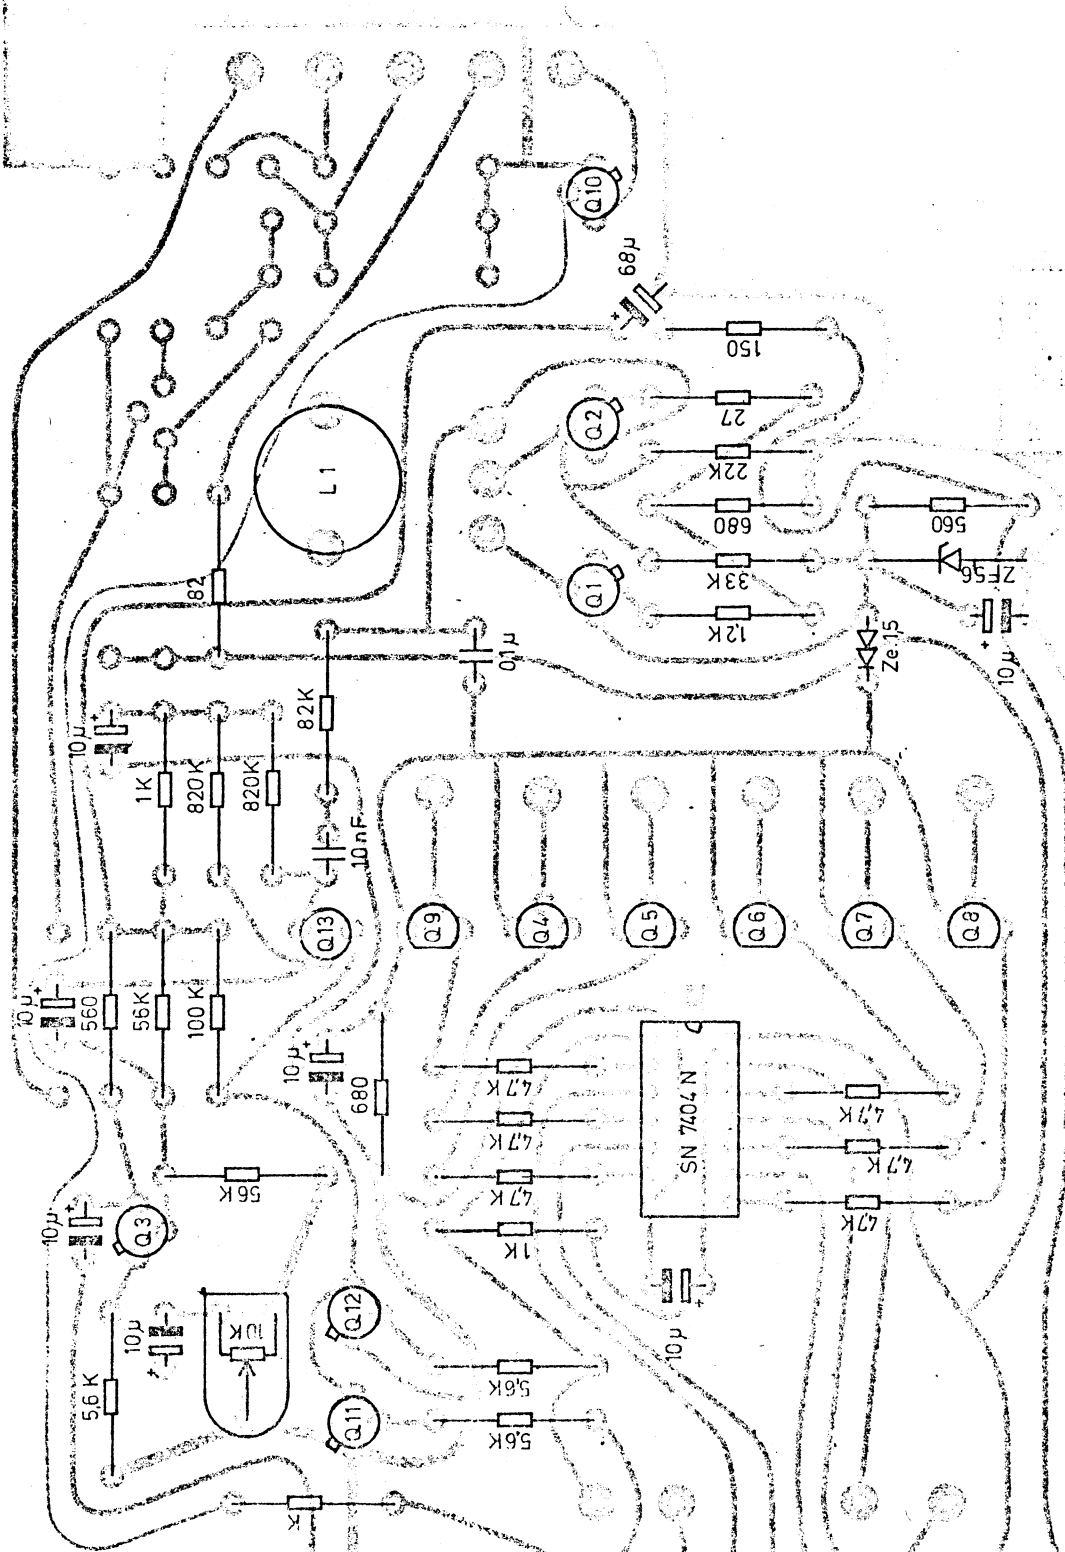

SEQUENTIAL TONE ENCODER J95B0246
53B0366-01

Dato. 4.1.74. PHB.

TYPE	NO.	CODE	DATA
	C1	76.5068	0.1 μ F
	C2	76.5070	10 nF
	C3-11	73.5109	10 μ F
	C12	76.5070	10 nF
	C13	73.5106	68 μ F
	R1	80.5249	1 k Ω
	R2-7	80.5257	4.7 k Ω
	R8	80.5247	680 Ω
	R9	80.5258	5.6 k Ω
	R10	80.5250	1.2 k Ω
	R11	80.5230	27 Ω
	R12	80.5247	680 Ω
	R13	80.5265	22 k Ω
	R14	80.5267	33 k Ω
	R15	80.5272	82 k Ω
	R16-17	80.5270	56 k Ω
	R18	80.5246	560 Ω
	R19	80.5258	5.6 k Ω
	R20	86B5042	10 k Ω
	R21	80.5249	1 k Ω
	R22	80.5236	82 Ω
	R23	80.5258	5.6 k Ω
	R24	80.5273	100 k Ω
	R25-26	80.5284	820 k Ω
	R27	80.5249	1 k Ω
	R28	80.5264	18 k Ω
	R29	80.5258	5.6 k Ω
	R30	80.5241	220 Ω
	R31	80.5249	1 k Ω
	R33	80.5263	15 k Ω
	R34	80.5255	3.3 k Ω
	R36	80.5260	8.2 k Ω
	R37	80.5239	150 Ω
	R38	80.5446	560 Ω
	L1	61.1097	Tone Coil, CCLR frequencies








TYPE	NO.	CODE	DATA
	Q1-3	99.5121	Transistor
	Q4-9	99.5144	Transistor
	Q10-12	99.5121	Transistor
	Q13	99.5204	Transistor
	Q14	99.5121	Transistor
	D1	99.5209	Stab. diode
	D2	99B5009	LED diode
	D3	99.5114	Zener diode
	IC1	14B5022	Integrated circuit
	SW1-5	47.5047	Rotary switch
		49.5047	Knob for rotary switch
		49.5028	Cap insert for knob
		49.5029	Pointer for knob
	SW6	47B5043	Toggle switch ON-OFF-ON
	SW8	47B5028	Toggle switch ON-OFF-ON
		41B5026	Receptacles (AMP)
		37B0011	Module Locking Cam
		20B5031	Screw for above
		24B5001	Washer for above
		28B5003	Retaining pin for above

SEQUENTIAL TONE ENCODER U95B0284

X401.913

FS-G13

Dato. 9.1.1974. PHB.

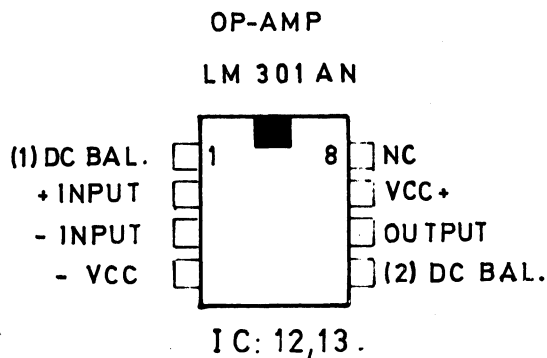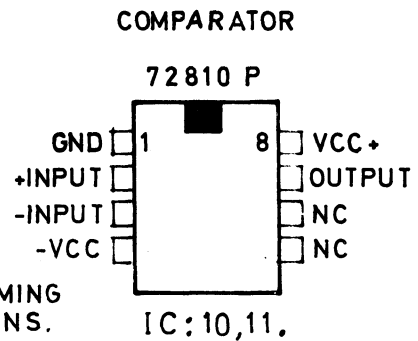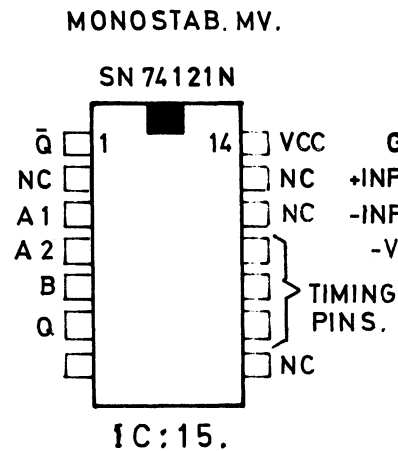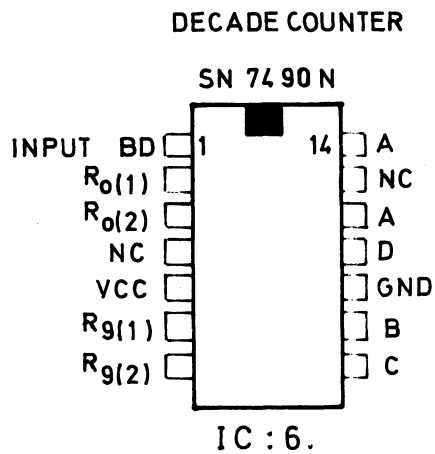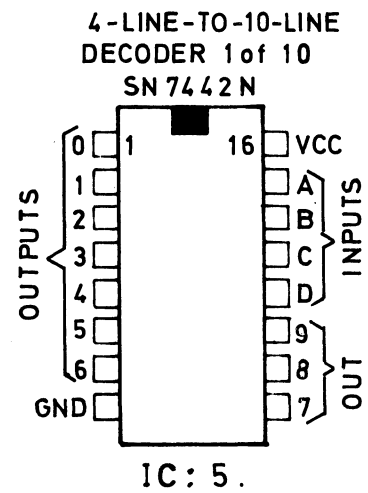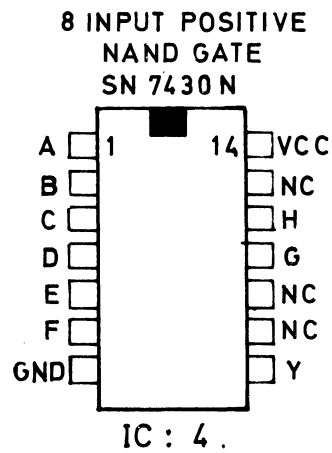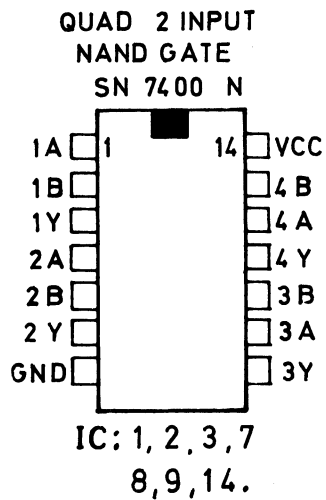


konstr./tegn.
F.B.N.
godk.
29-10-72
kompliste

**PIN LOCATION for IC's on
TIME BASE CIRCUIT**
SEE DWG. NO. 506.502

KODE

TEGN NR
506.503.
A 1

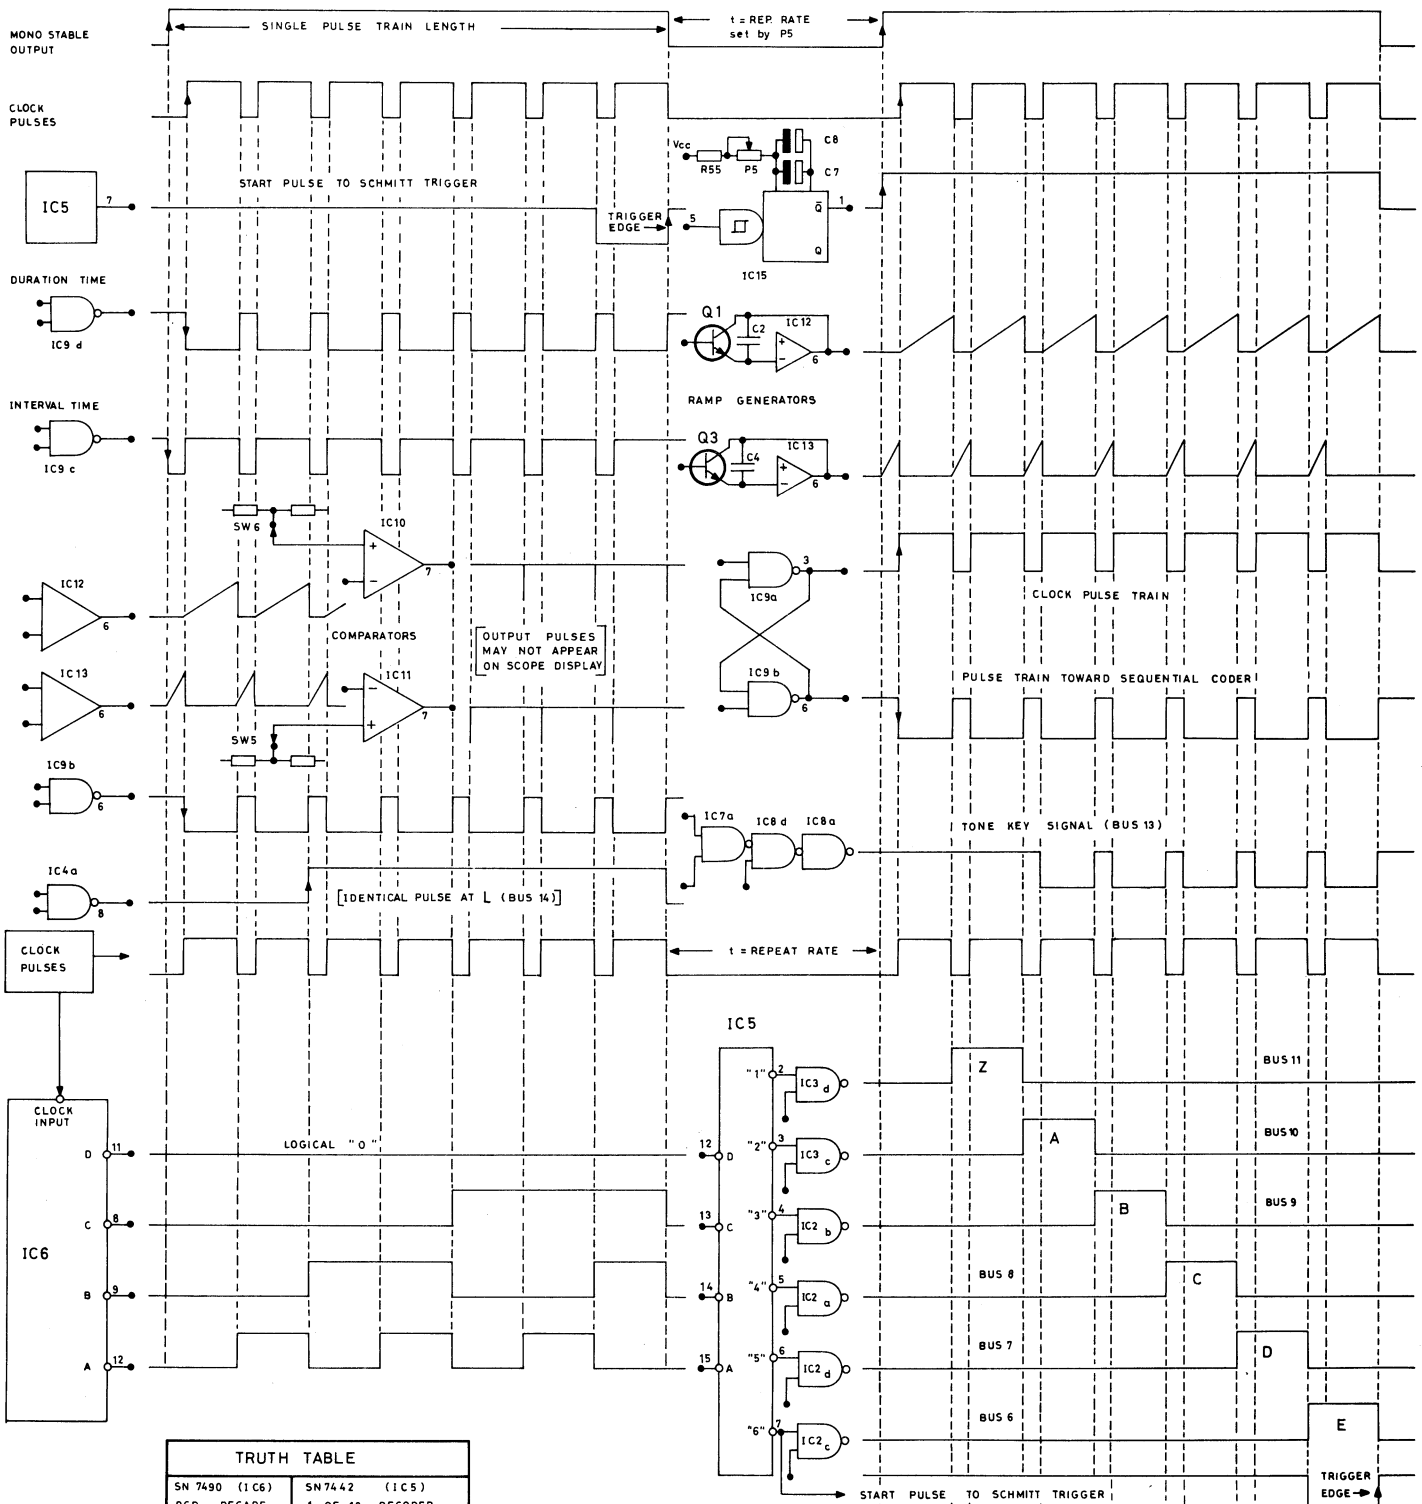


TRUTH TABLE									
SN 7490 (IC6)				SN 7442 (IC5)					
BCD DECADE COUNT SEQUENCE				1-OF-10 DECODER OUTPUT					
CLOCK COUNT	D	C	B	A	IC PIN NO.	1	2	3	4
0	0	0	0	0	1	1	1	1	1
1	0	0	0	1	2	1	1	1	1
2	0	0	1	0	3	1	1	1	1
3	0	0	1	1	4	1	1	1	1
4	0	1	0	0	5	1	1	1	1
5	0	1	0	1	6	1	1	1	1
6	0	1	1	0	7	1	1	1	1


LOGIC CLEARS WHEN OUTPUT "6" (PIN 7) OF IC5 GOES ZERO.

SEQUENTIAL PULSE GENERATION		
TS-G13	D401.935	STORNO
U95 B 0251		

SEQUENTIAL TONE ENCODER

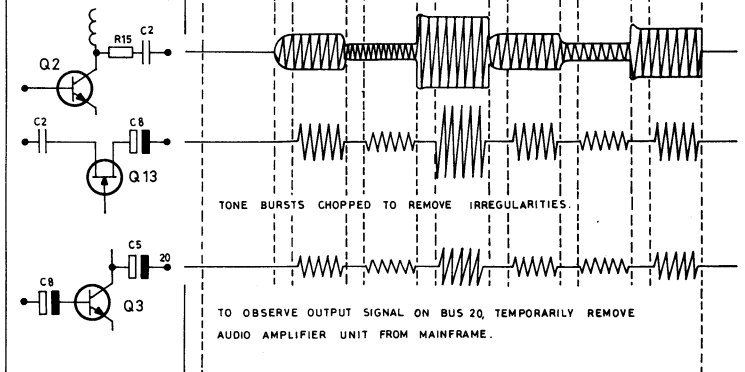


TO OBSERVE OUTPUT SIGNAL ON BUS 20, TEMPORARILY REMOVE AUDIO AMPLIFIER UNIT FROM MAINFRAME.

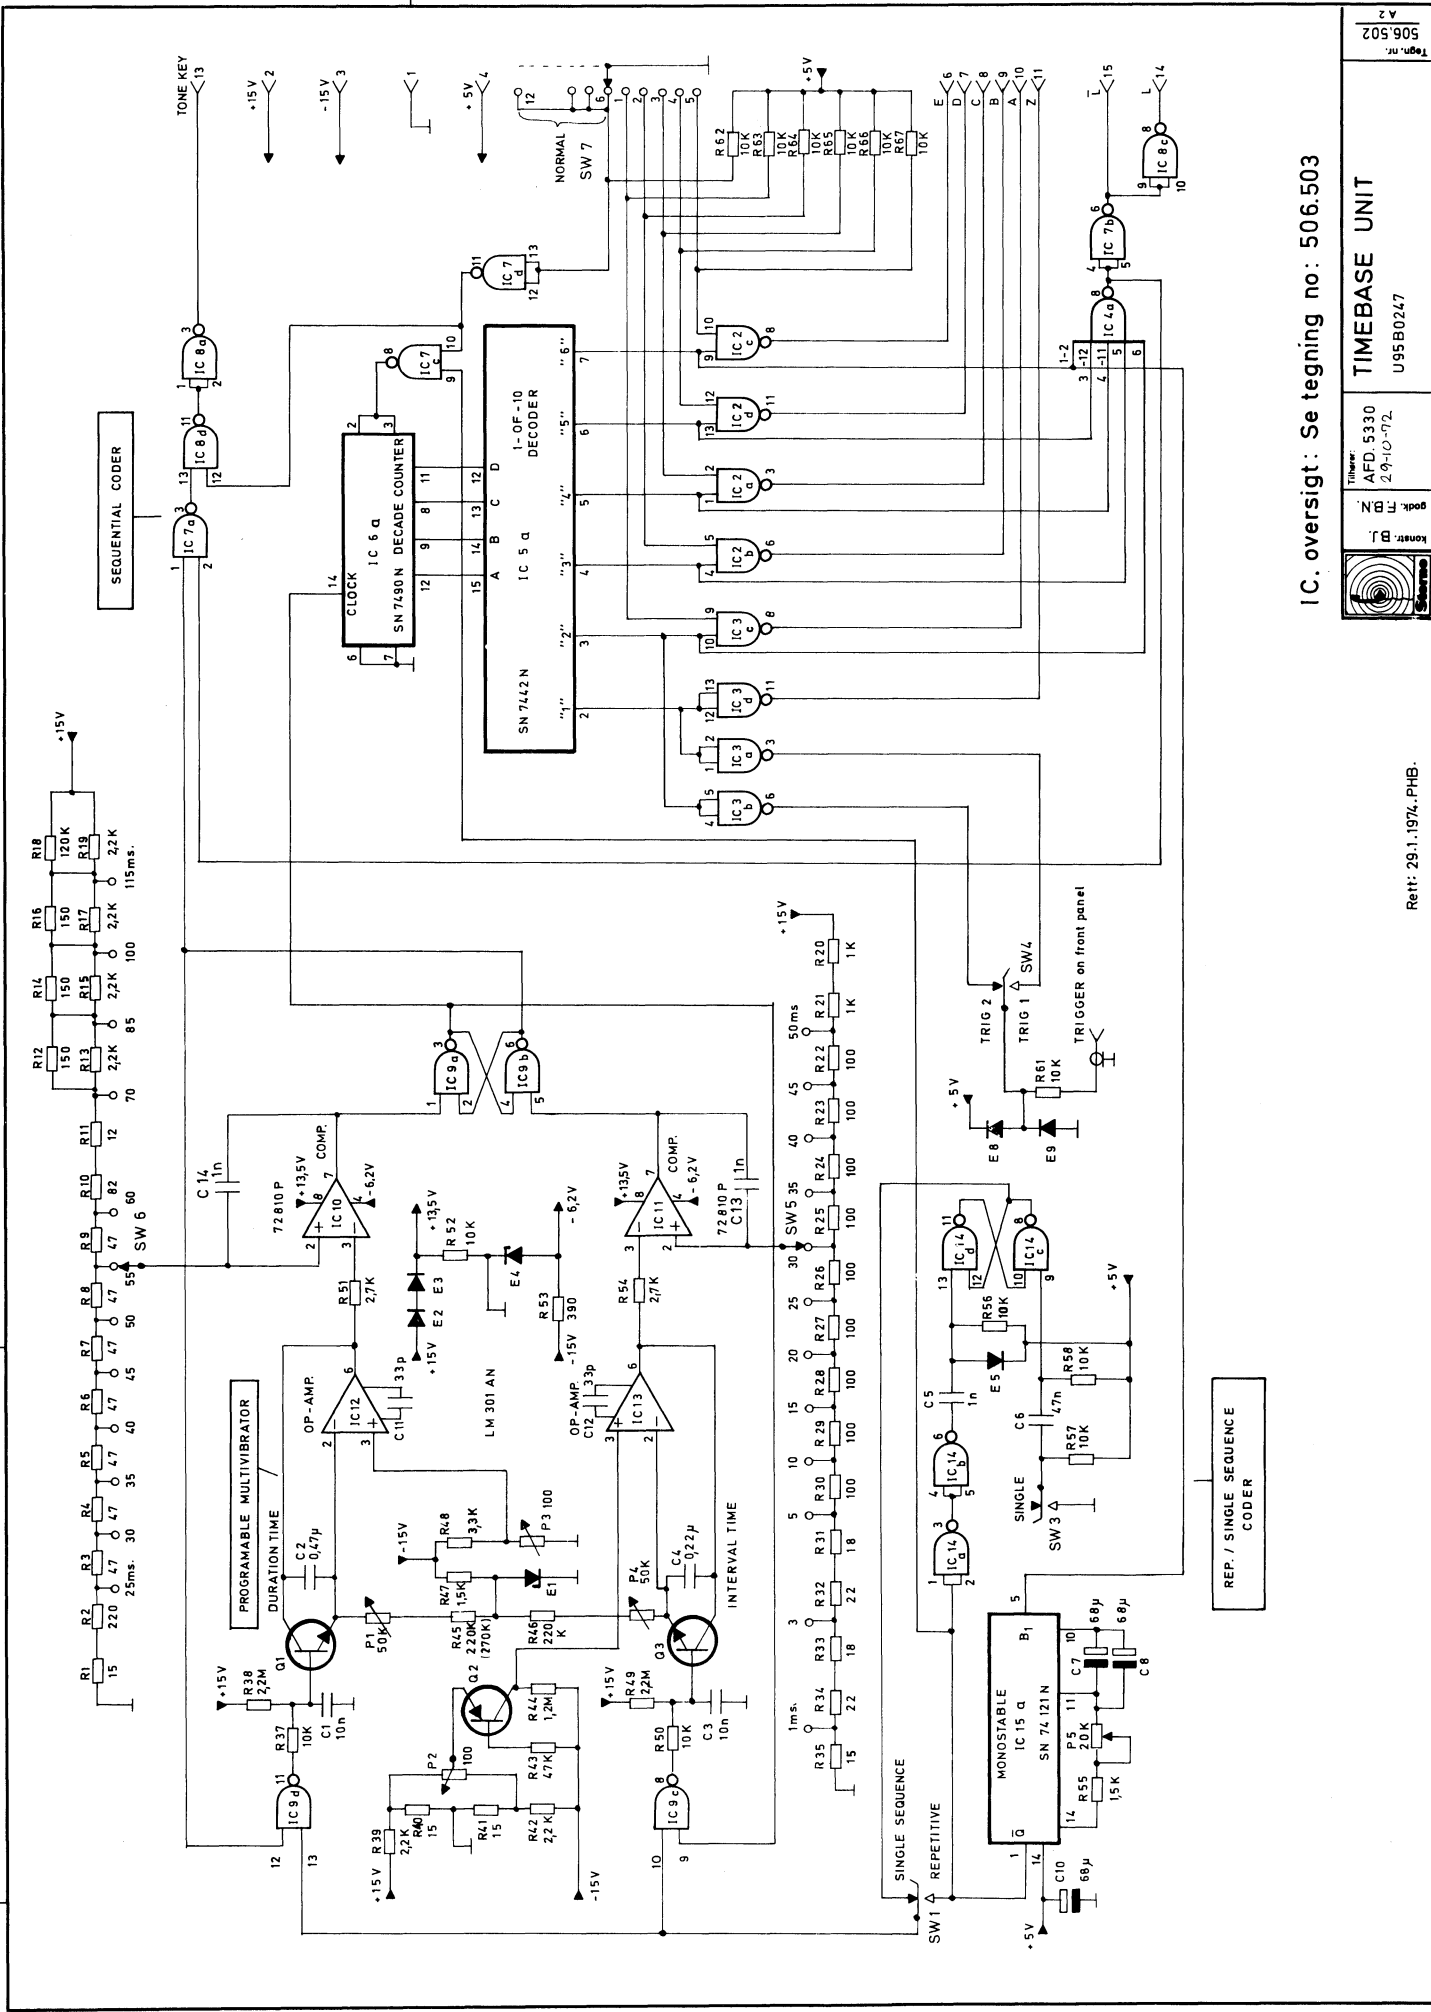

IC. oversigt: Se tegning no: 506.503

	TIMEBASE UNIT U95B0247	Title: AFD. 5330 2.9-10-72 godk. F.B.N. konstr. B.J.
--	----------------------------------	---------------------------------------------------------------

Retr. 29.1.1974, PHB.

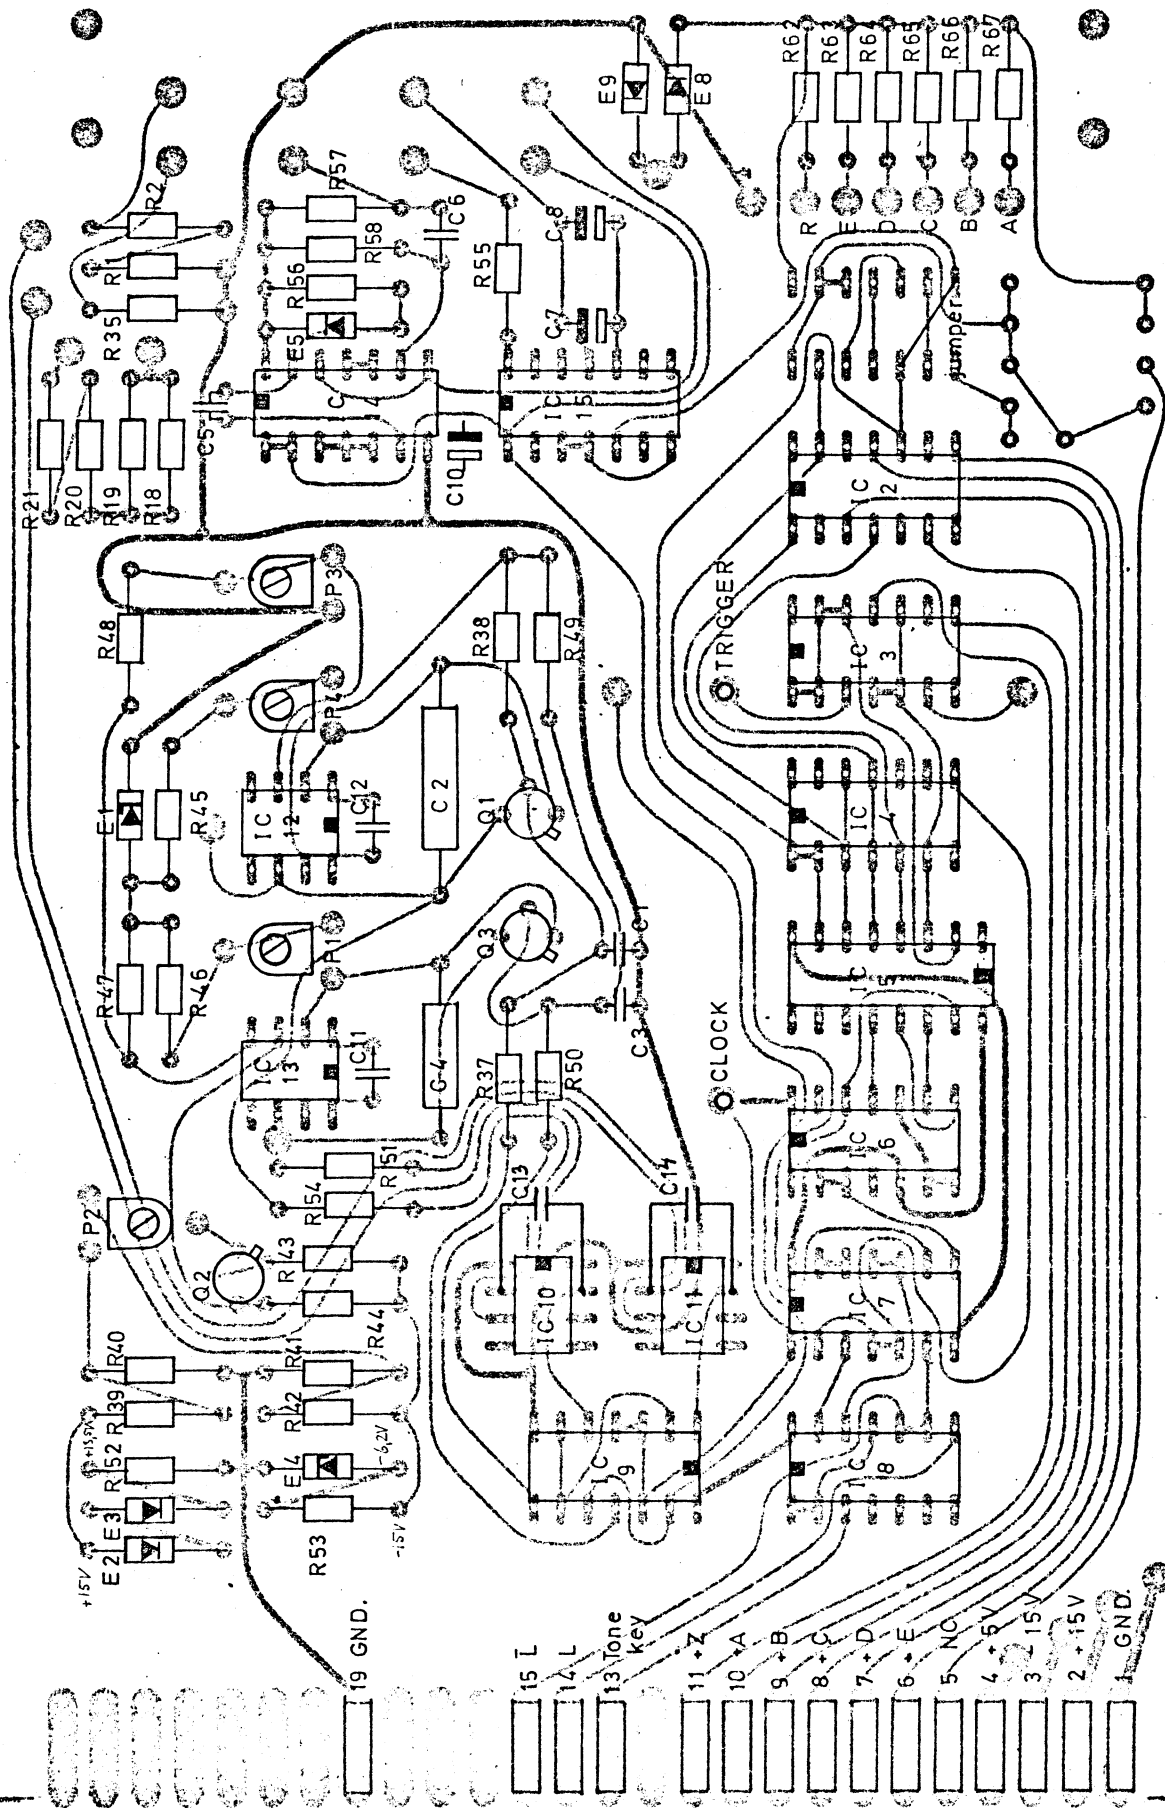

KOMPONENT PLACERING FOR TIMEBASE UNIT
U95 B0247

506.068 / 3

Storno

TYPE	NO.	CODE	DATA
	C1	76.5070	10 nF 10% 50V
	C2	76.5076	0.47 μ F 10% 100V
	C3	76.5070	10 nF 10% 50V
	C4	76.5074	0.22 μ F 10% 100V
	C5	76.5069	1 nF 10% 50V
	C6	76.5072	47 nF 10% 50V
	C7	73.5106	68 μ F 20% 16V
	C8	73.5106	68 μ F 20% 16V
	C10	73.5106	68 μ F 20% 16V
	C11	74.5116	33 pF \pm 5% 160V
	C12	74.5116	33 pF \pm 5% 160V
	C13	76.5069	1 nF 10% 50V
	C14	76.5069	1 nF 10% 50V
	R1	89B5005	15 Ω 1% 1/8W
	R2	89B5022	220 Ω 1% 1/8W
	R3-9	89B5010	47 Ω 1% 1/8W
	R10	80.5236	82 Ω 5% 1/8W
	R11	80.5226	12 Ω 5% 1/8W
	R12	89B5019	150 Ω 1% 1/8W
	R13	89B5045	2.2 k Ω 1% 1/8W
	R14	89B5019	150 Ω 1% 1/8W
	R15	89B5045	2.2 k Ω 1% 1/8W
	R16	89B5019	150 Ω 1% 1/8W
	R17	89B5045	2.2 k Ω 1% 1/8W
	R18	80.5274	120 k Ω 5% 1/8W
	R19	89B5045	2.2 k Ω 1% 1/8W
	R20, 21	89B5038	1 k Ω 1% 1/8W
	R22-30	89B5018	100 Ω 1% 1/8W
	R31	80.5228	18 Ω 5% 1/8W
	R32	89B5007	22 Ω 1% 1/8W
	R33	80.5228	18 Ω 5% 1/8W
	R34	89B5007	22 Ω 1% 1/8W
	R35	89B5005	15 Ω 1% 1/8W
	R37	80.5261	10 k Ω 5% 1/8W
	R38	80.5489	2.2 M Ω 5% 1/4W
	R39	80.5253	2.2 k Ω 5% 1/8W
	R40, 41	80.5227	15 Ω 5% 1/8W
	R42	80.5253	2.2 k Ω 5% 1/8W
	R43	80.5269	47 k Ω 5% 1/8W
	R44	80.5486	1.2 M Ω 5% 1/4W
	R45	80.5277	220 k Ω 5% 1/8W
	(or)	80.5278	270 k Ω 5% 1/8W
	R46	80.5277	220 k Ω 5% 1/8W
	R47	80.5251	1.5 k Ω 5% 1/8W
	R48	80.5255	3.3 k Ω 5% 1/8W
	R49	80.5489	2.2 M Ω 5% 1/4W

Storno

TYPE	NO.	CODE	DATA
	R50	80.5261	10 k Ω 5% carbon film
	R51	80.5254	2.7 k Ω 5% " "
	R52	80.5261	10 k Ω 5% " "
	R53	80.5444	390 Ω 5% " "
	R54	80.5254	2.7 k Ω 5% " "
	R55	80.5251	1.5 k Ω 5% " "
	R56-58	80.5261	10 k Ω 5% " "
	R61-67	80.5261	10 k Ω 5% " "
	P1	86B5047	50 k Ω trimming potentiometer
	P2	86B5041	100 Ω " "
	P3	86B5041	100 Ω " "
	P4	86B5047	50 k Ω " "
	P5	86.5043	20 k Ω " "
	E1	99.5114	Zener diode 5.6 V
	E2, 3	99.5237	Diode 1N4148
	E4	99.5011	Zener diode 6.2 V
	E5	99.5237	Diode 1N4148
	E8, 9	99.5237	Diode 1N4148
	Q1	99.5121	Transistor BC107
	Q2	99.5251	Transistor BC177
	Q3	99.5121	Transistor BC107
	IC2, 3	14B5023	Integrated circuit SN7400N
	IC4	14B5020	" SN7430N
	IC5	14B5025	" SN7442N
	IC6	14B5026	" SN7490N
	IC7,8,9	14B5023	" SN7400N
	IC10,11	14B5027	" 72810P
	IC12,13	14B5012	" LM301AN
	IC14	14B5023	" SN7400N
	IC15	14B5024	" SN74121N

TIME BASE UNIT U95B0247 FS-G13

X401.899

Storno

TYPE	NO.	CODE	DATA
	SW1 SW3 SW4 SW5 SW6 SW7	47B5028 47.5054 47B5028 47.5047 47.5047 47B5034 49.5027 49.5028 49.5029	Toggle switch ALCO Push button micro switch Toggle switch ALCO Rotary switch ELMA Rotary switch ELMA Rotary switch ELMA Knob for ELMA switch Cap insert for knob Pointer for knob
		37B0011 20B5031 24B5001 28B5003	Module locking cam Screw for above Washer for above Retaining pin for above
		41B5063	BNC connector
		41B5026	Receptacles (AMP)

Storno

TYPE	NO.	CODE	DATA

TIME BASE UNIT U95B0247 FS-G13


X401.899

TYPE	NO.	CODE	DATA
C1	76.5082	4.7 μ F	polyest
C2,3	74.5155	1 nF	ceramic
C4	76.5072	47 nF	2% ceramic
C5	74.5135	10 pF	ceramic
C6,7	73.5109	10 μ F	tantal
C8	74.5129	3.3 pF	ceramic N150
C9	76.5082	4.7 μ F	polyest
R1	89B5033	600 Ω	1% metal film
R2	80.5249	1 k Ω	5% carbon film
R3,4	89B5082	2.4 k Ω	1% metal film
R5	89B5053	6.8 k Ω	" "
R6	89B5045	2.2 k Ω	" "
R7	89B5034	680 Ω	1% " "
R8	89B5022	220 Ω	1% " "
R9	89B5013	68 Ω	1% " "
R10	89B5007	22 Ω	1% " "
R11	89B5001	10 Ω	1% " "
R12	89B5045	2.2 k Ω	1% " "
R13	89B5052	5.6 k Ω	1% " "
R14	86B5042	10 k Ω	20% trimming potentiometer
R15	89B5063	33 k Ω	1% metal film
R16	89B5058	15 k Ω	" "
R17	80.5277	220 k Ω	5% carbon film
R18	89B5054	8.2 k Ω	1% metal film
R19	80.5273	100 k Ω	5% carbon film
R20	89B5052	5.6 k Ω	1% metal film
R21	89B5083	3.6 k Ω	" "
R22	89B5048	2.7 k Ω	" "
R23	80.5266	27 k Ω	5% carbon film
R24	89B5043	1.8 k Ω	1% metal film
R25	80.5265	22 k Ω	5% carbon film
R26	89B5041	1.2 k Ω	1% metal film
R27	80.5262	12 k Ω	5% carbon film
R28	89B5034	680 Ω	1% metal film
R29	80.5261	10 k Ω	5% carbon film
R30,31	89B5032	560 Ω	1% metal film
R32,33	89B5049	3.3 k Ω	1% " "
R34	89B5054	8.2 k Ω	1% " "
R35,36	80.5259	6.8 k Ω	5% carbon film
R37,38	80.5218	2.7 Ω	5% " "
R39	89B5042	1.5 k Ω	1% metal film
R40	89B5066	47 k Ω	1% " "
R41,42	89B5029	390 Ω	1% " "
R43	80.5433	47 Ω	5% carbon film
R44	89B5033	600 Ω	1% metal film
R45	80.5432	39 Ω	5% carbon film

TYPE	NO.	CODE	DATA
R46	89B5032	560 Ω	1% metal film
R47	89B5033	600 Ω	1% " "
R48	86B5042	10 k Ω	20% trimming potentiometer
D1-4	99.5028	Diode	1N4148
Q1	99.5128	Transistor	NPN 2N3053
Q2	99.5215	Transistor	PNP 2N2905
IC1	14B5012	Op Amp	LM301AN
IC2	14B5011	Op Amp	LM741CN
IC3	14B5012	Op Amp	LM301AN
SW1	47B5028	Toggle Switch	JBT JMT123
SW2,3	47B5034	Rotary Switch	ELMA 01-12
SW4	47B5028	Toggle Switch	JBT JMT123
SW5	47B5040	Toggle Switch	JBT JMT121
	49.5027	Knob for ELMA switch	
	49.5028	Cap Insert for knob	
	49.5029	Pointer for knob	
	41B5063	Coaxial Connector	for front panel
	41B5026	Receptacles	(AMP)
	37B0011	Module Locking Cam	
	20B5031	Screw for above	
	24B5001	Washer for above	
	28B5003	Retaining Pin	for above

AUDIO AMPLIFIER U95B0248

X401.900

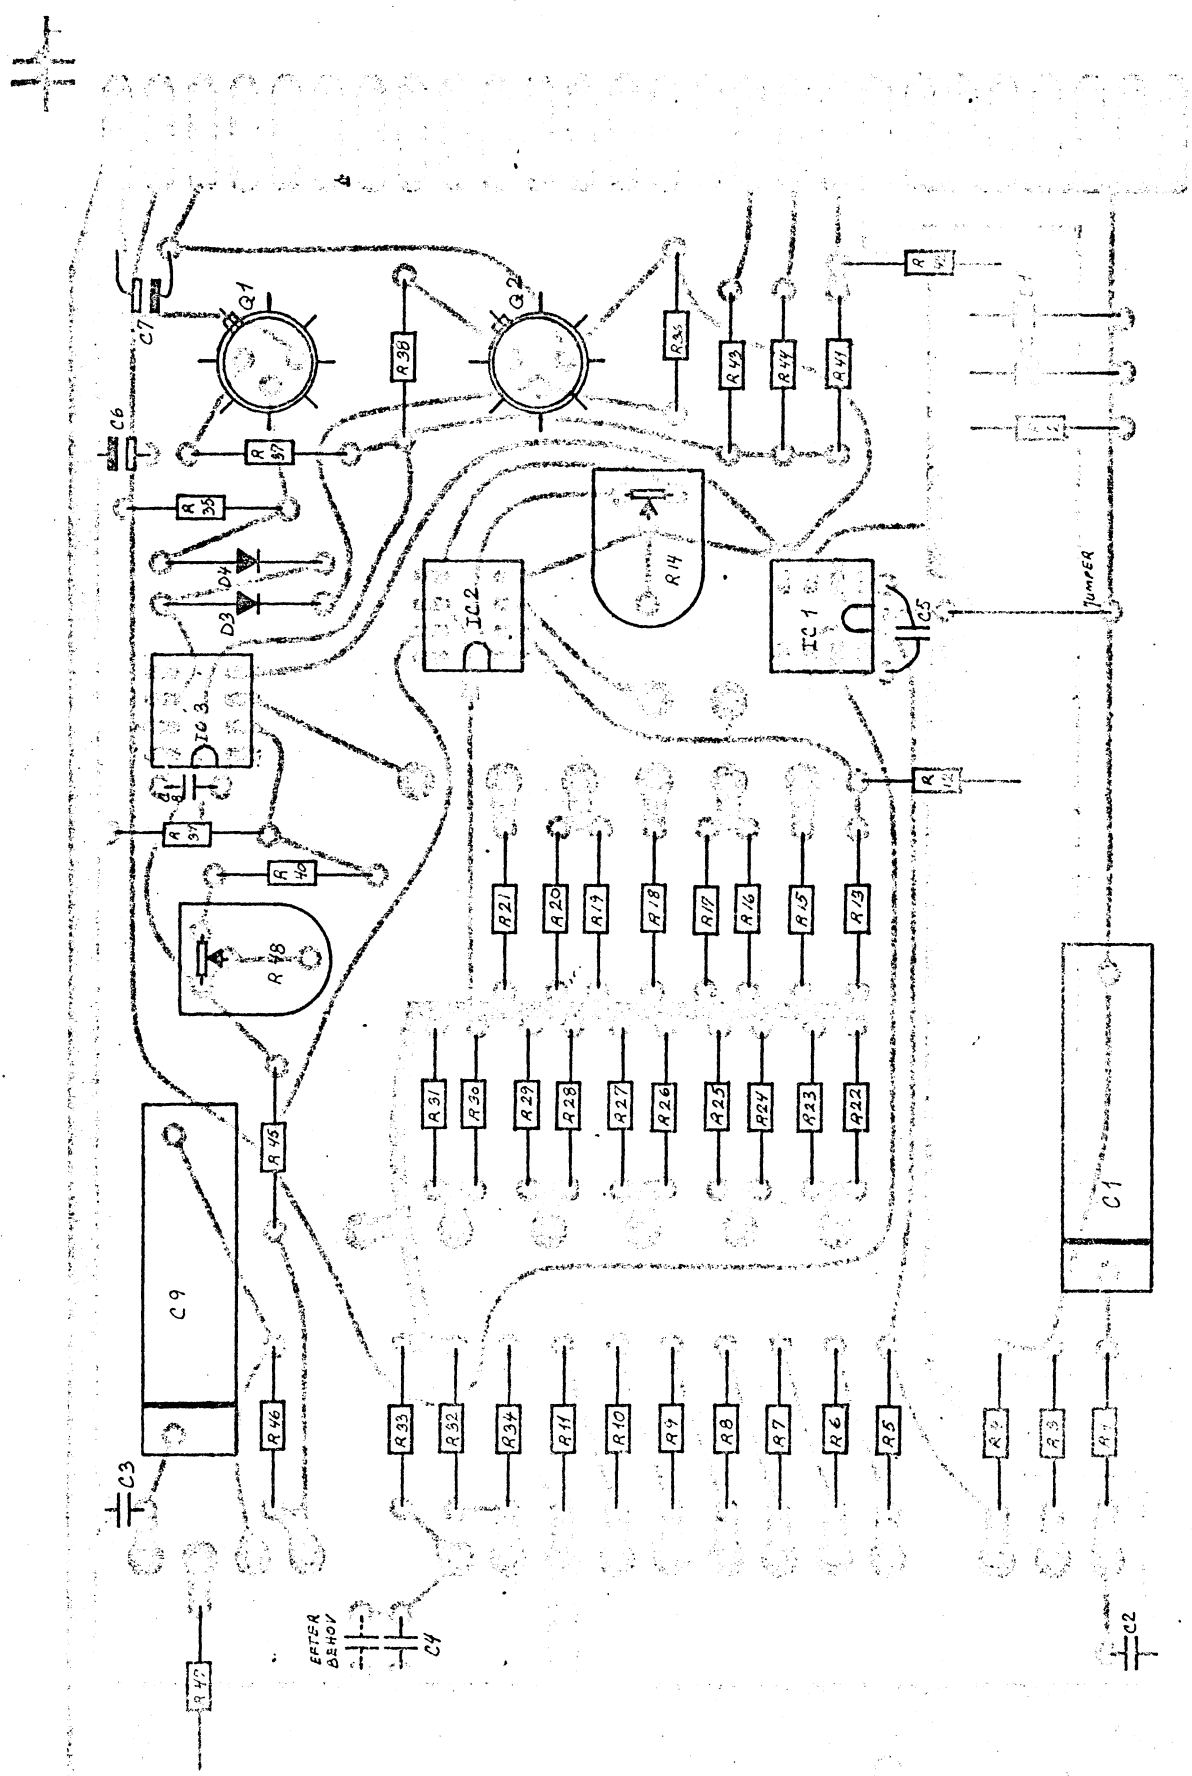

AUDIO AMPLIFIER U95B0248

PREAMPLIFIER/LIMITER

Q-MULTIPLIER


DETECTOR

SCHMITT
TRIGGER

DELAY CIRCUIT

TRIGGER
(BISTAB.)

MUTING CIRCUIT

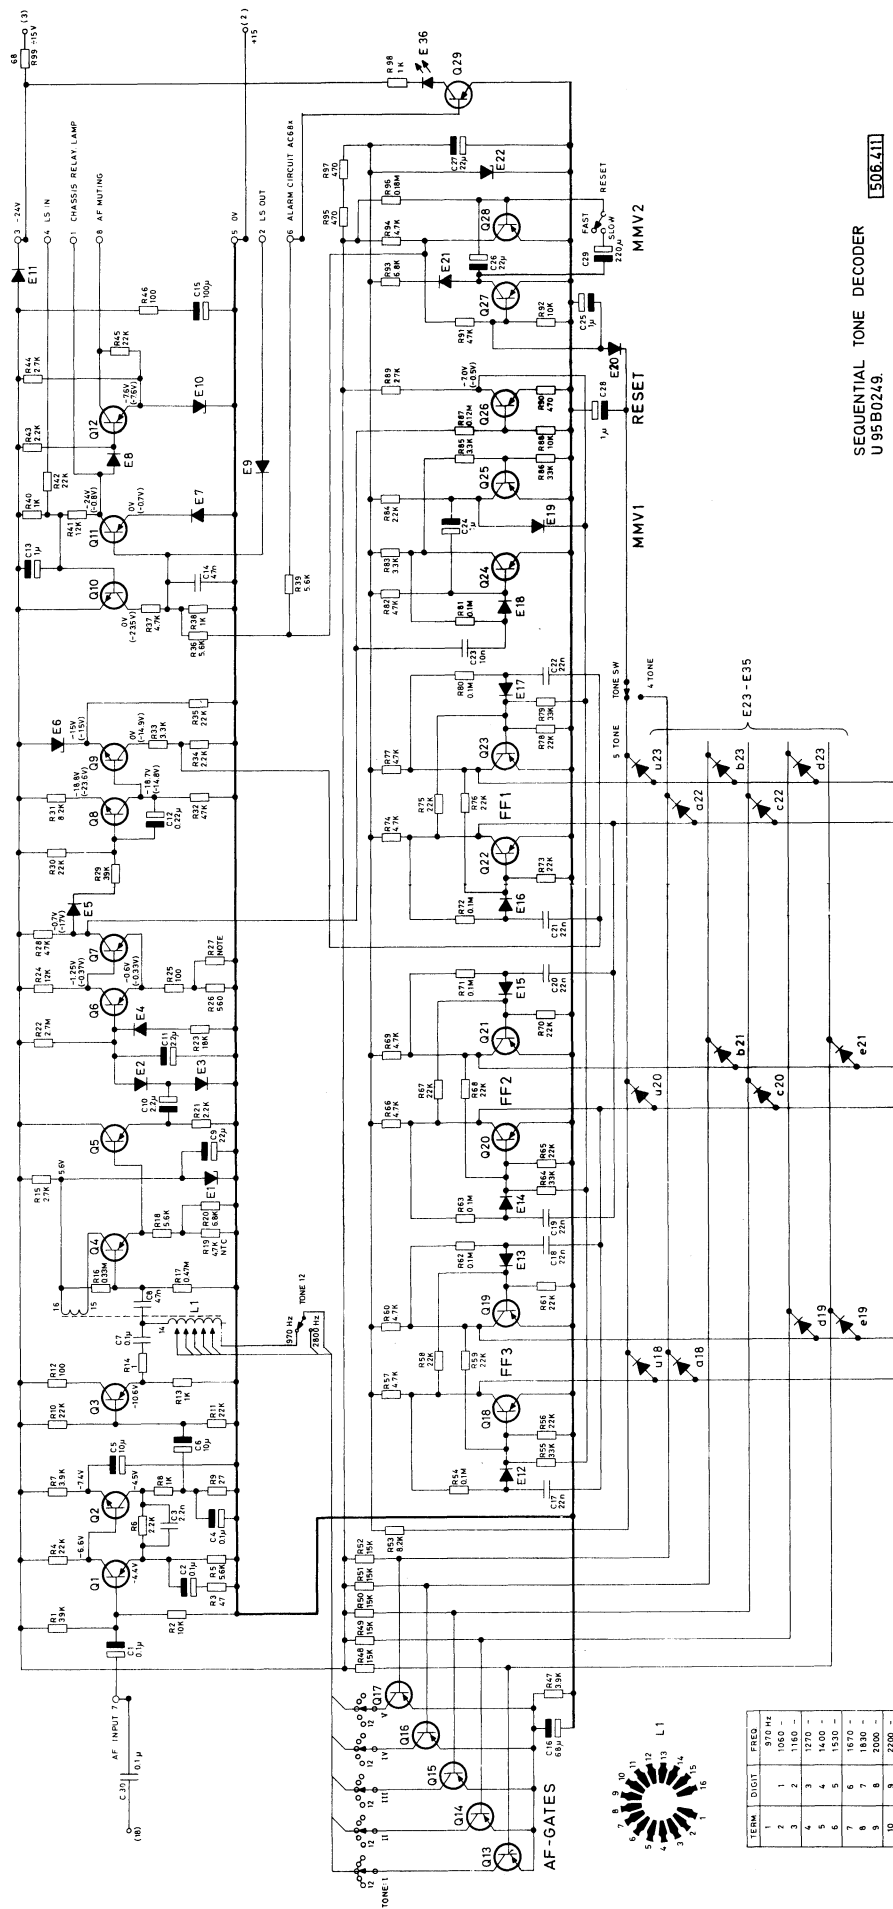

TERM	OUT	FREQ
1	1	1865 Hz
2	2	1165 -
3	3	1270 -
4	4	1400 -
5	5	1510 -
6	6	1670 -
7	7	1870 -
8	8	2000 -
9	9	2200 -
10	10	2400 -
11	11	2600 -
12	12	2800 -
13	13	3000 -

SEQUENTIAL TONE DECODER
U95B0249

1506.411

Storno

TYPE	NO.	CODE	DATA
C28	73.5114	1 μ F	tantal
C29	73.5049	220 μ F	ellyt
C30	76.5073	0.1 μ F	10% ellyt
R98	81.5049	1 k Ω	5% carbon film
R99	81.5035	68 Ω	5% carbon film
E36	99.5009	LED diode	HP5082-4440
Q29	99.5144	Transistor	BC214L
SR	10.2521	Sequential Tone Receiver	SR685
SW1-5	47.5047	Rotary Switch	ELMA
	49.5047	Knob for switch	
	49.5028	Cap Insert for knob	
	49.5029	Pointer for knob	
SW6-8	47B5028	Toggle Switch	ALCO
	47B5026	Receptacles (AMP)	
	37B0011	Module Locking Cam	
	20B5031	Screw for above	
	24B5001	Washer for above	
	28B5003	Retaining Pin for above	


Storno

TYPE	NO.	CODE	DATA

SEQUENTIAL TONE DECODER U95B0249

X401.911

FS-G13

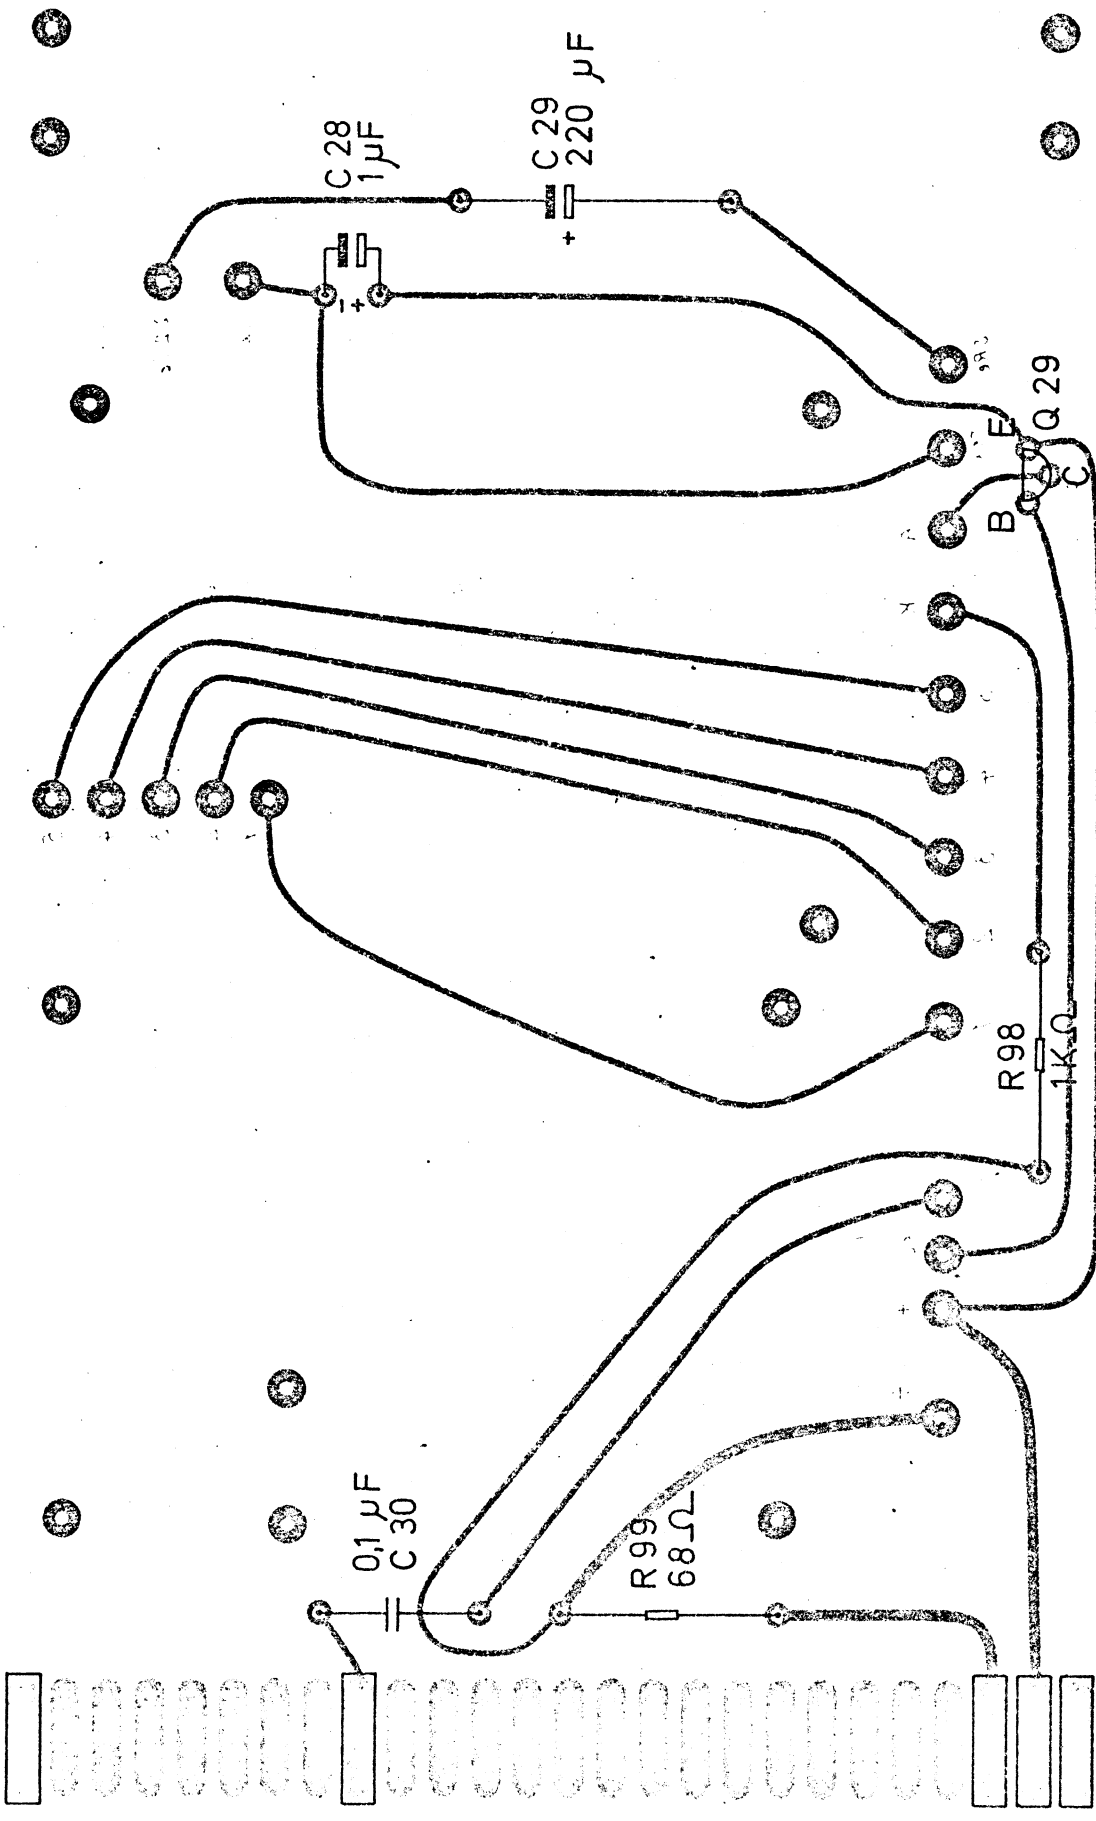

Storno

T'YPE	NO.	CODE	DATA
E7	99.5020	Diode 1N4004	1/4W
E8	99.5020	Diode 1N4004	
E9	99.5136	Diode AA119	
E10	99.5075	Zenerdiode 7.5 5%	
E11	99.5020	Diode 1N4004	
E12	99.5028	Diode 1N914	
E13	99.5028	Diode 1N914	
E14	99.5028	Diode 1N914	
E15	99.5028	Diode 1N914	
E16	99.5028	Diode 1N914	
E17	99.5028	Diode 1N914	
E18	99.5028	Diode 1N914	
E19	99.5028	Diode 1N914	
E20	99.5028	Diode 1N914	
E21	99.5028	Diode 1N914	
E22	99.5146	Zenerdiode 6.8V 5%	
E23	99.5028	Diode 1N914	
E24	99.5028	Diode 1N914	
E25	99.5028	Diode 1N914	
E26	99.5028	Diode 1N914	
E27	99.5028	Diode 1N914	
E28	99.5028	Diode 1N914	
E29	99.5028	Diode 1N914	
E30	99.5028	Diode 1N914	
E31	99.5028	Diode 1N914	
E32	99.5028	Diode 1N914	
E33	99.5028	Diode 1N914	
E34	99.5028	Diode 1N914	
E35	99.5028	Diode 1N914	
Q1	99.5144	Transistor BC214L	
Q2	99.5143	Transistor BC107	
Q3	99.5144	Transistor BC214L	
Q4	99.5144	Transistor BC214L	
Q5	99.5144	Transistor BC214L	
Q6	99.5144	Transistor BC214L	
Q7	99.5144	Transistor BC214L	
Q8	99.5143	Transistor BC107	
Q9	99.5143	Transistor BC107	
Q10	99.5143	Transistor BC107	
Q11	99.5144	Transistor BC214L	
Q12	99.5142	Transistor AC128	

SR685,
SR6851

X400.285

Storno

TYPE	NO.	CODE	DATA
	Q13 Q14 Q15 Q16 Q17 Q18 Q19 Q20 Q21 Q22 Q23 Q24 Q25 Q26 Q27 Q28	99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144 99.5144	Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L Transistor BC214L

Storno


TYPE	NO.	CODE	DATA

SR685,
SR6851

SEKVENSTONEMODTAGER

SR685,
SR6851

X400.285

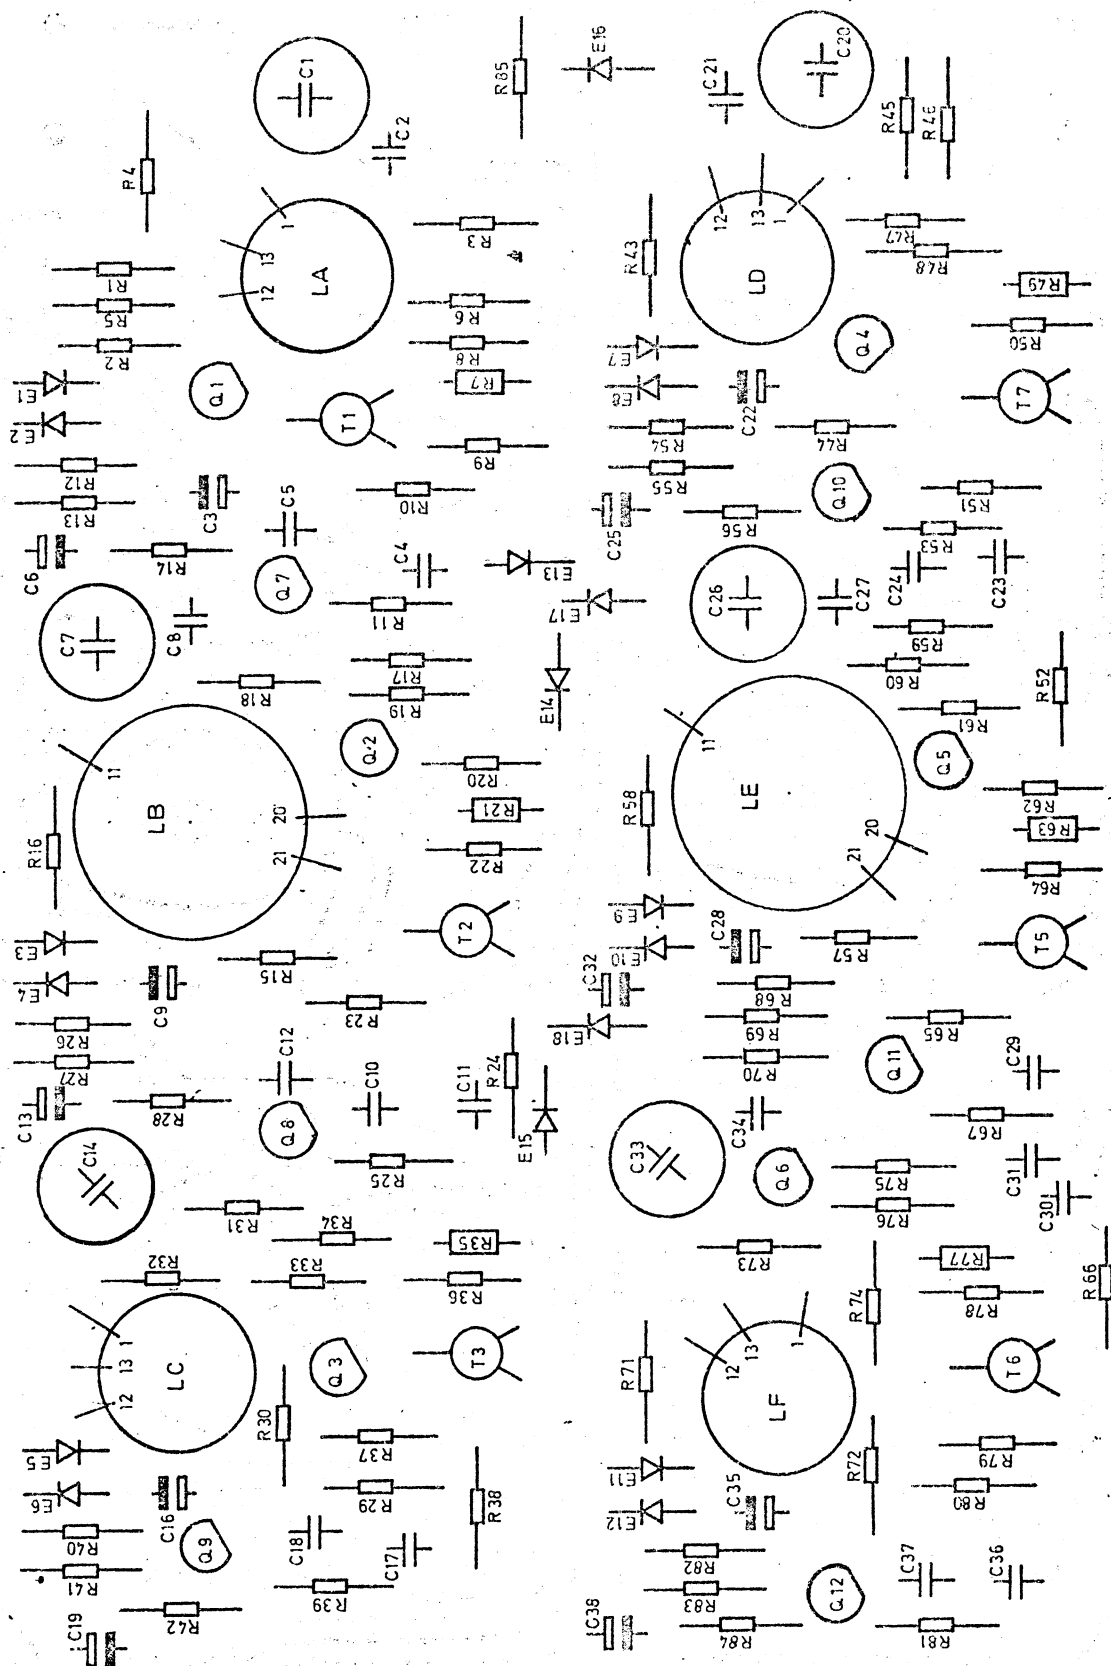

-15 V
+15 V

DUAL TONE ENCODER
U95B0250
Dato. 6.2.74. PHB.

Storno

TYPE	NO.	CODE	DATA
	C1	76.5068	0.1 μ F 1% polystyr TB
	C2	76.5059	2.2 nF 10% polystyr FL
	C3	73.5109	10 μ F 20% tantal
	C4	76.5069	1 nF 10% polyester
	C5	76.5072	47 nF 10% polyester FL
	C6	73.5126	4.7 μ F 20% tantal
	C7	76.5068	0.1 μ F 1% polystyr TB
	C8	76.5059	2.2 nF 10% polystyr FL
	C9	73.5109	10 μ F 20% tantal
	C10	76.5069	1 nF 10% polyester
	C11	76.5070	10 nF 10% polyester
	C12	76.5072	47 nF 10% polyester FL
	C13	73.5126	4.7 μ F 20% tantal
	C14	76.5068	0.1 μ F 1% polystyr TB
	C15	76.5059	2.2 nF 10% polystyr FL
	C16	73.5109	10 μ F 20% tantal
	C17	76.5059	2.2 nF 10% polystyr FL
	C18	76.5072	47 nF 10% polyester FL
	C19	73.5126	4.7 μ F 20% tantal
	C20	76.5068	0.1 μ F 1% polystyr TB
	C21	76.5059	2.2 nF 10% polystyr FL
	C22	73.5109	10 μ F 20% tantal
	C23	76.5069	1 nF 10% polyester
	C24	76.5072	47 nF 10% polyester FL
	C25	73.5126	4.7 μ F 20% tantal
	C26	76.5068	0.1 μ F 1% polystyr TB
	C27	76.5059	2.2 nF 10% polystyr FL
	C28	73.5109	10 μ F 20% tantal
	C29	76.5069	1 nF 10% polyester
	C30	76.5070	10 nF 10% polyester
	C31	76.5072	47 nF 10% polyester FL
	C32	73.5126	4.7 μ F 20% tantal
	C33	76.5068	0.1 μ F 1% polystyr TB
	C34	76.5059	2.2 nF 10% polystyr FL
	C35	73.5109	10 μ F 20% tantal
	C36	76.5059	2.2 nF 10% polystyr FL
	C37	76.5072	47 nF 10% polyester FL
	C38	73.5126	4.7 μ F 20% tantal
	R1	80.5246	560 Ω 5% carbon film
	R2	80.5250	1.2 k Ω 5% " "
	R3	80.5266	27 k Ω 5% " "
	R4	80.5262	12 k Ω 5% " "
	R5	80.5273	100 k Ω 5% " "
	R6	80.5261	10 k Ω 5% " "
	R7	89.5009	4.7 k Ω 20% NTC resistor
	R8	80.5260	8.2 k Ω 5% carbon film

Storno

TYPE	NO.	CODE	DATA
	R9	80.5257	4.7 k Ω 5% carbon film
	R10	80.5263	15 k Ω 5% " "
	R11	80.5277	220 k Ω 5% " "
	R12	80.5277	220 k Ω 5% " "
	R13	80.5262	12 k Ω 5% " "
	R14	80.5249	1 k Ω 5% " "
	R15	80.5246	560 Ω 5% " "
	R16	80.5250	1.2 k Ω 5% " "
	R17	80.5266	27 k Ω 5% " "
	R18	80.5262	12 k Ω 5% " "
	R19	80-5269	47 k Ω 5% " "
	R20	80.5261	10 k Ω 5% " "
	R21	89.5009	4.7 k Ω 20% NTC resistor
	R22	80.5260	8.2 k Ω 5% carbon film
	R23	80.5257	4.7 k Ω 5% " "
	R24	80.5269	47 k Ω 5% " "
	R25	80.5277	220 k Ω 5% " "
	R26	80.5277	220 k Ω 5% " "
	R27	80.5262	12 k Ω 5% " "
	R28	80.5249	1 k Ω 5% " "
	R29	80.5246	560 Ω 5% " "
	R30	80.5250	1.2 k Ω 5% " "
	R31	80.5266	27 k Ω 5% " "
	R32	80.5262	12 k Ω 5% " "
	R33	80.5273	100 k Ω 5% " "
	R34	80.5261	10 k Ω 5% " "
	R35	89.5009	4.7 k Ω 20% NTC resistor
	R36	80.5260	8.2 k Ω 5% carbon film
	R37	80.5257	4.7 k Ω 5% " "
	R38	80.5263	15 k Ω 5% " "
	R39	80.5277	220 k Ω 5% " "
	R40	80.5277	220 k Ω 5% " "
	R41	80.5262	12 k Ω 5% " "
	R42	80.5249	1 k Ω 5% " "
	R43	80.5246	560 Ω 5% " "
	R44	80.5250	1.2 k Ω 5% " "
	R45	80.5266	27 k Ω 5% " "
	R46	80.5262	12 k Ω 5% " "
	R47	80.5273	100 k Ω 5% " "
	R48	80.5261	10 k Ω 5% " "
	R49	89.5009	4.7 k Ω 20% NTC resistor

DUAL TONE ENCODER U95B0250 FS-G13

X401.912

Storno


TYPE	NO.	CODE	DATA
	R50	80.5260	8.2 k Ω 5% carbon film 1/8W
	R51	80.5257	4.7 k Ω 5% " 1/8W
	R52	80.5263	15 k Ω 5% " 1/8W
	R53	80.5277	220 k Ω 5% " 1/8W
	R54	80.5277	220 k Ω 5% " 1/8W
	R55	80.5262	12 k Ω 5% " 1/8W
	R56	80.5249	1 k Ω 5% " 1/8W
	R57	80.5264	560 Ω 5% " 1/8W
	R58	80.5250	1.2 k Ω 5% " 1/8W
	R59	80.5266	27 k Ω 5% " 1/8W
	R60	80.5262	12 k Ω 5% " 1/8W
	R61	80.5269	47 k Ω 5% " 1/8W
	R62	80.5261	10 k Ω 5% " 1/8W
	R63	89.5009	4.7 k Ω 20% NTC resistor 0.6W
	R64	80.5260	8.2 k Ω 5% carbon film 1/8W
	R65	80.5257	4.7 k Ω 5% " 1/8W
	R66	80.5269	47 k Ω 5% " 1/8W
	R67	80.5277	220 k Ω 5% " 1/8W
	R68	80.5277	220 k Ω 5% " 1/8W
	R69	80.5262	12 k Ω 5% " 1/8W
	R70	80.5249	1 k Ω 5% " 1/8W
	R71	80.5246	560 Ω 5% " 1/8W
	R72	80.5250	1.2 k Ω 5% " 1/8W
	R73	80.5266	27 k Ω 5% " 1/8W
	R74	80.5262	12 k Ω 5% " 1/8W
	R75	80.5273	100 k Ω 5% " 1/8W
	R76	80.5261	10 k Ω 5% " 1/8W
	R77	89.5009	4.7 k Ω 20% NTC resistor 0.6W
	R78	80.5260	8.2 k Ω 5% carbon film 1/8W
	R79	80.5257	4.7 k Ω 5% " 1/8W
	R80	80.5263	15 k Ω 5% " 1/8W
	R81	80.5277	220 k Ω 5% " 1/8W
	R82	80.5277	220 k Ω 5% " 1/8W
	R83	80.5262	12 k Ω 5% " 1/8W
	R84	80.5249	1 k Ω 5% " 1/8W
	R85	80.5250	1.2 k Ω 5% " 1/8W
	T1-6	86.5039	10 k Ω potentiometer lin. 0.1W
	E1-18	99.5028	Diode OA200 or 1N4148
	E19	99B5009	LED diode HP5082-4440
	Q1-12	99.5117	Transistor 2N2924 or BC167A

Storno

TYPE	NO.	CODE	DATA
	LA	61.840	Tone Coil
	LB	61.1085	Tone Coil
	LC	61.928	Tone Coil
	LD	61.840	Tone Coil
	LE	61.1085	Tone Coil
	LF	61.1005	Tone Coil
	SW1 to SW6		
	SW7	47B5028	Toggle Switch JBT JMT123
		47B5041	Toggle Switch JBT JMT131
	SW	47B5044	Rotary Switch ELMA 12 pos. 3 decks
		49.5022	Knob for ELMA switch
		49.5035	Pointer for knob
		49.5045	Cap Insert for knob
		37B0011	Module Locking Cam
		20B5031	Screw for above
		24B5001	Washer for above
		28B5001	Retaining Pin for above
		41B5026	Receptacles (AMP)

DUAL TONE ENCODER U95B0250 FS-G13

X401.912



konstr./tegn.
godk.
komp.liste

P.S. for TONE SIGNALING TEST GENERATOR


KODE

TEGN. NR.


506.436

A 4

LM 309K



Q1, Q2, Q3

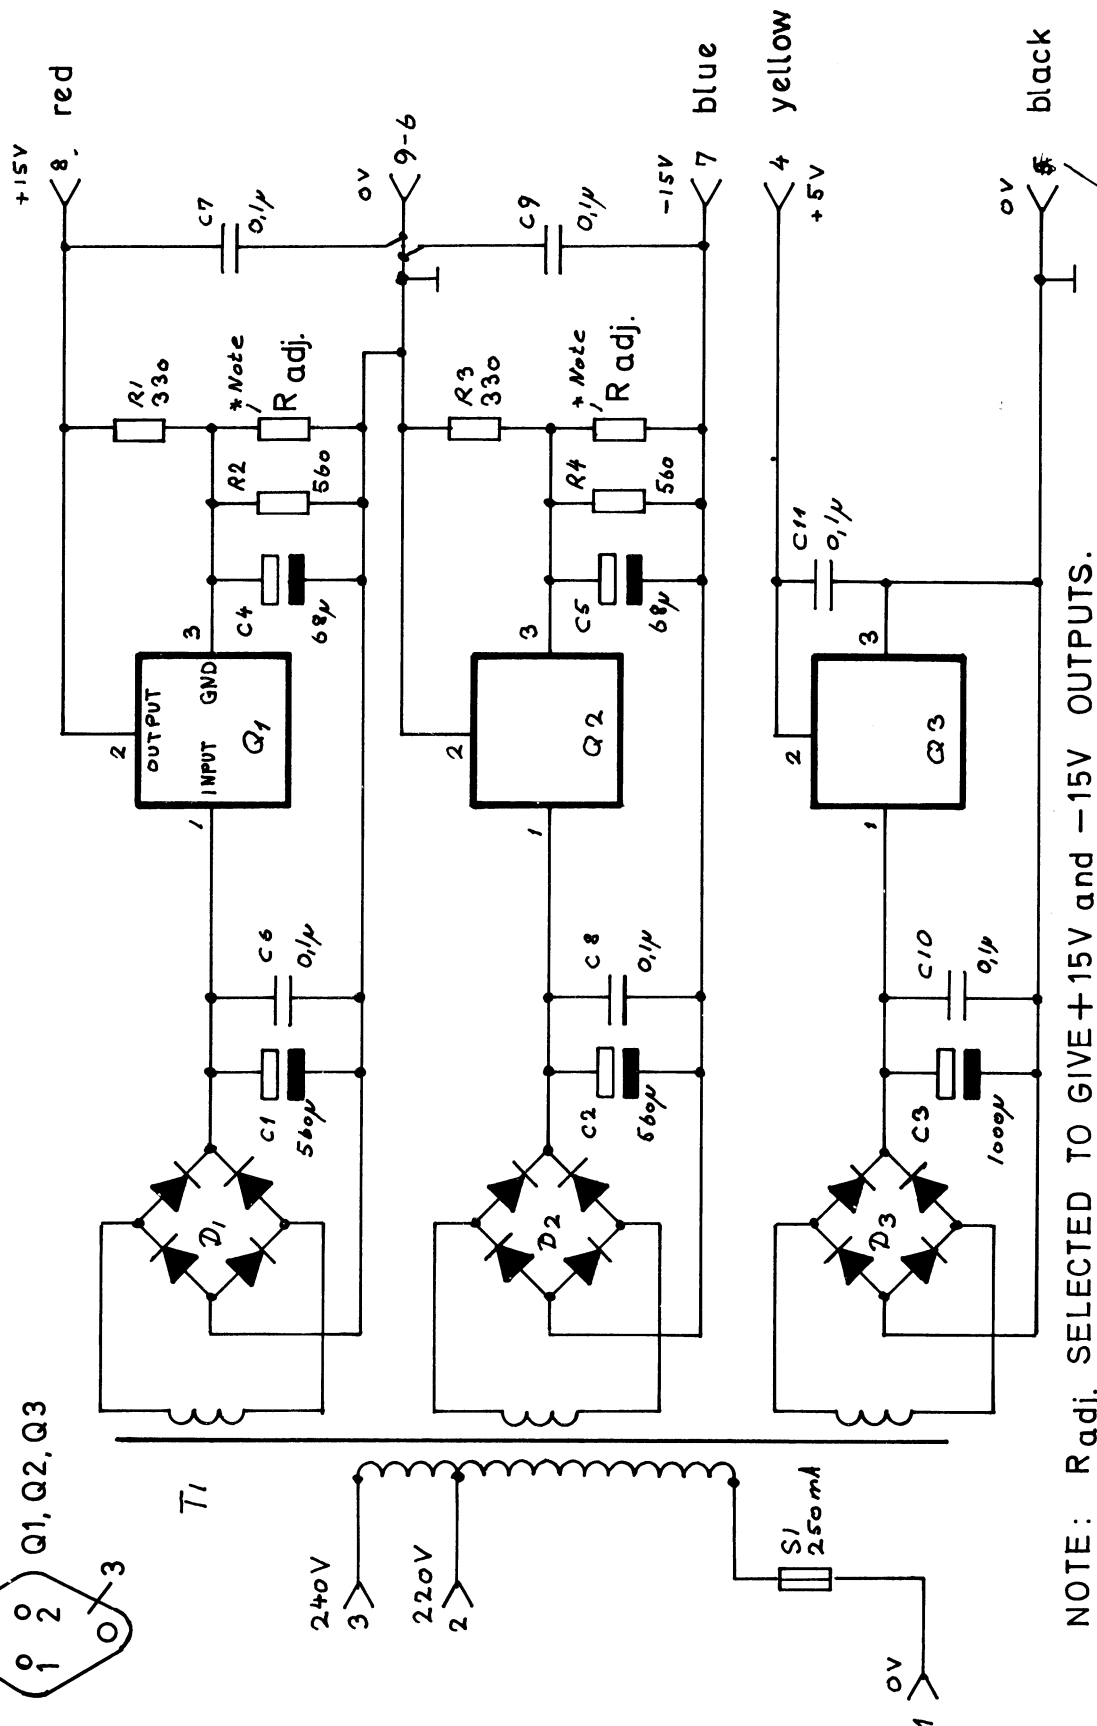

NOTE: R_{adj.} SELECTED TO GIVE +15V and -15V OUTPUTS.
VALUE FOR EACH RESISTOR approx. 3.3 k Ω .

Storno


TYPE	NO.	CODE	DATA
	C 1, 2 C 3 C 4, 5 C 6-11	73B5006 73B5015 73.5106 76.5073	Capacitor, ellyt 560 μ F 50/60 V Capacitor, ellyt 1000 μ F 35/40 V Capacitor, tantal 68 μ F 16 V Capacitor, polystyr 0,1 μ F 100 V
	R 1, 3 R 2, 4	80.5243 80.5246	Resistor, carbon film, 330 Ω 5 % 1/8 W Resistor, carbon film, 560 Ω 5 % 1/8 W
	Q 1-3	14B5019	LM 309 K Integrated Regulator
	D 1-3	99B5001	Rectifier, Si, B 250 C, 1000/700
	T 1	60B5021	Transformer 60.20.1116 Reofon
	S 1	92.5029	Fuse, 250 mA
		59.5018 46.5013 97.5011 47.5062 38B5004 80.5432 36B5001	Insulating Kit for TO-3 house Fuse Holder Loudspeaker Slide Switch Cable Clamp Resistor, carbon film, 39 Ω 5 % 1/4 W Connector

Storno

TYPE	NO.	CODE	DATA

POWER SUPPLY UNIT U95B0245 FS-G13

X401.897

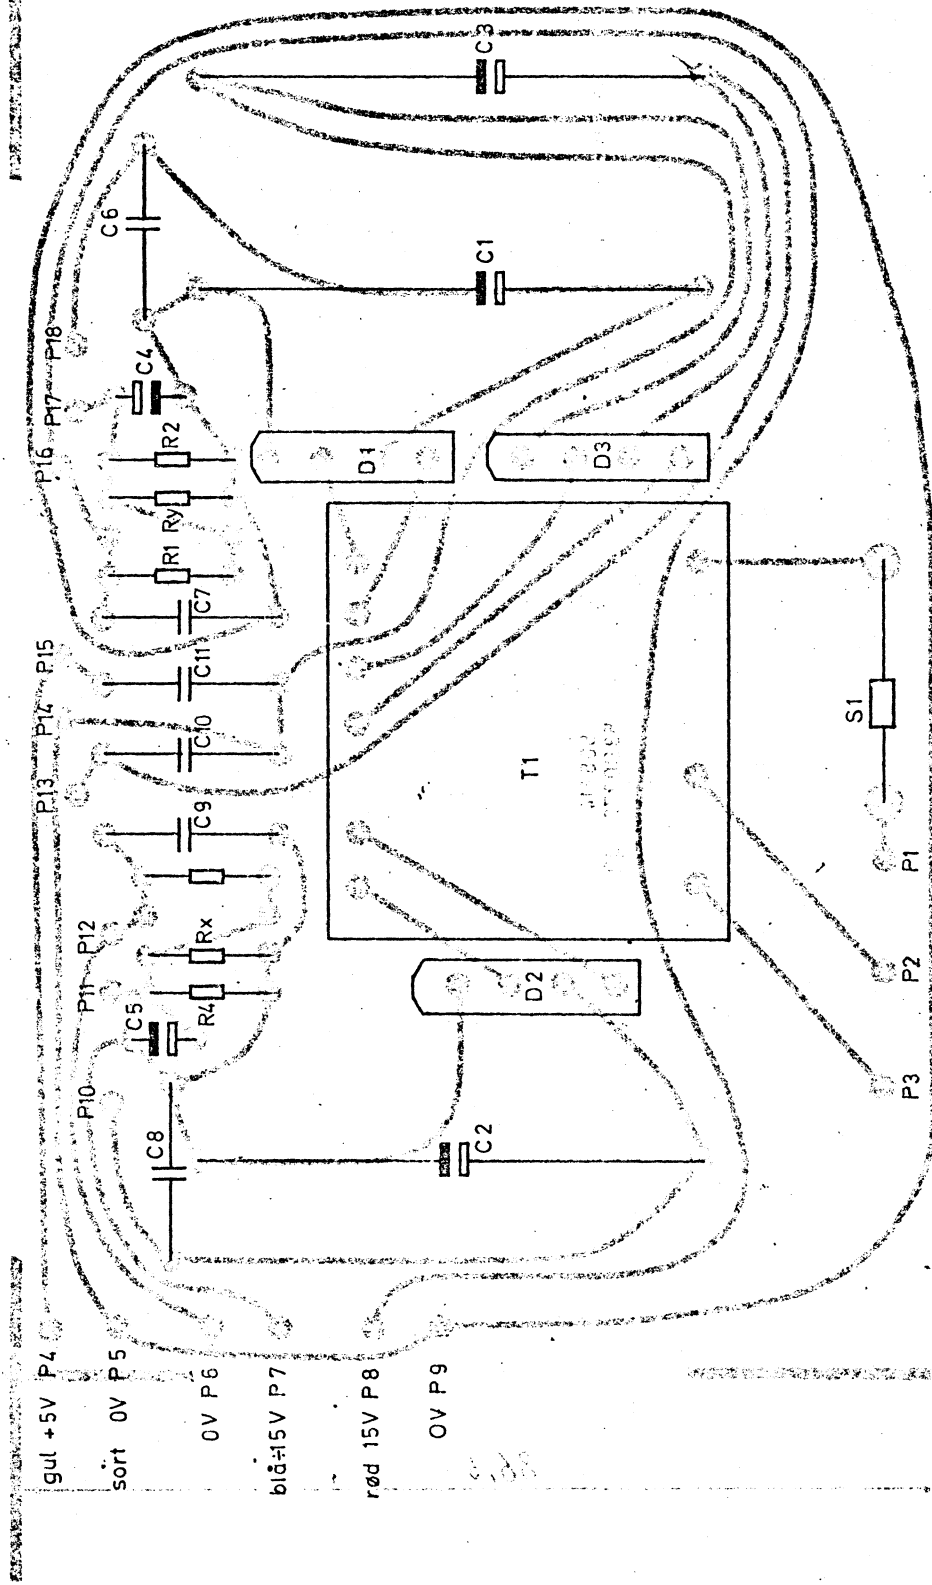

4.8.84

POWER SUPPLY UNIT U95B0245

DATO: 13.4.73. PHB

KOMPONENTPLACERING 505.114/3