


# CONDOR 43

LB NR. 1029

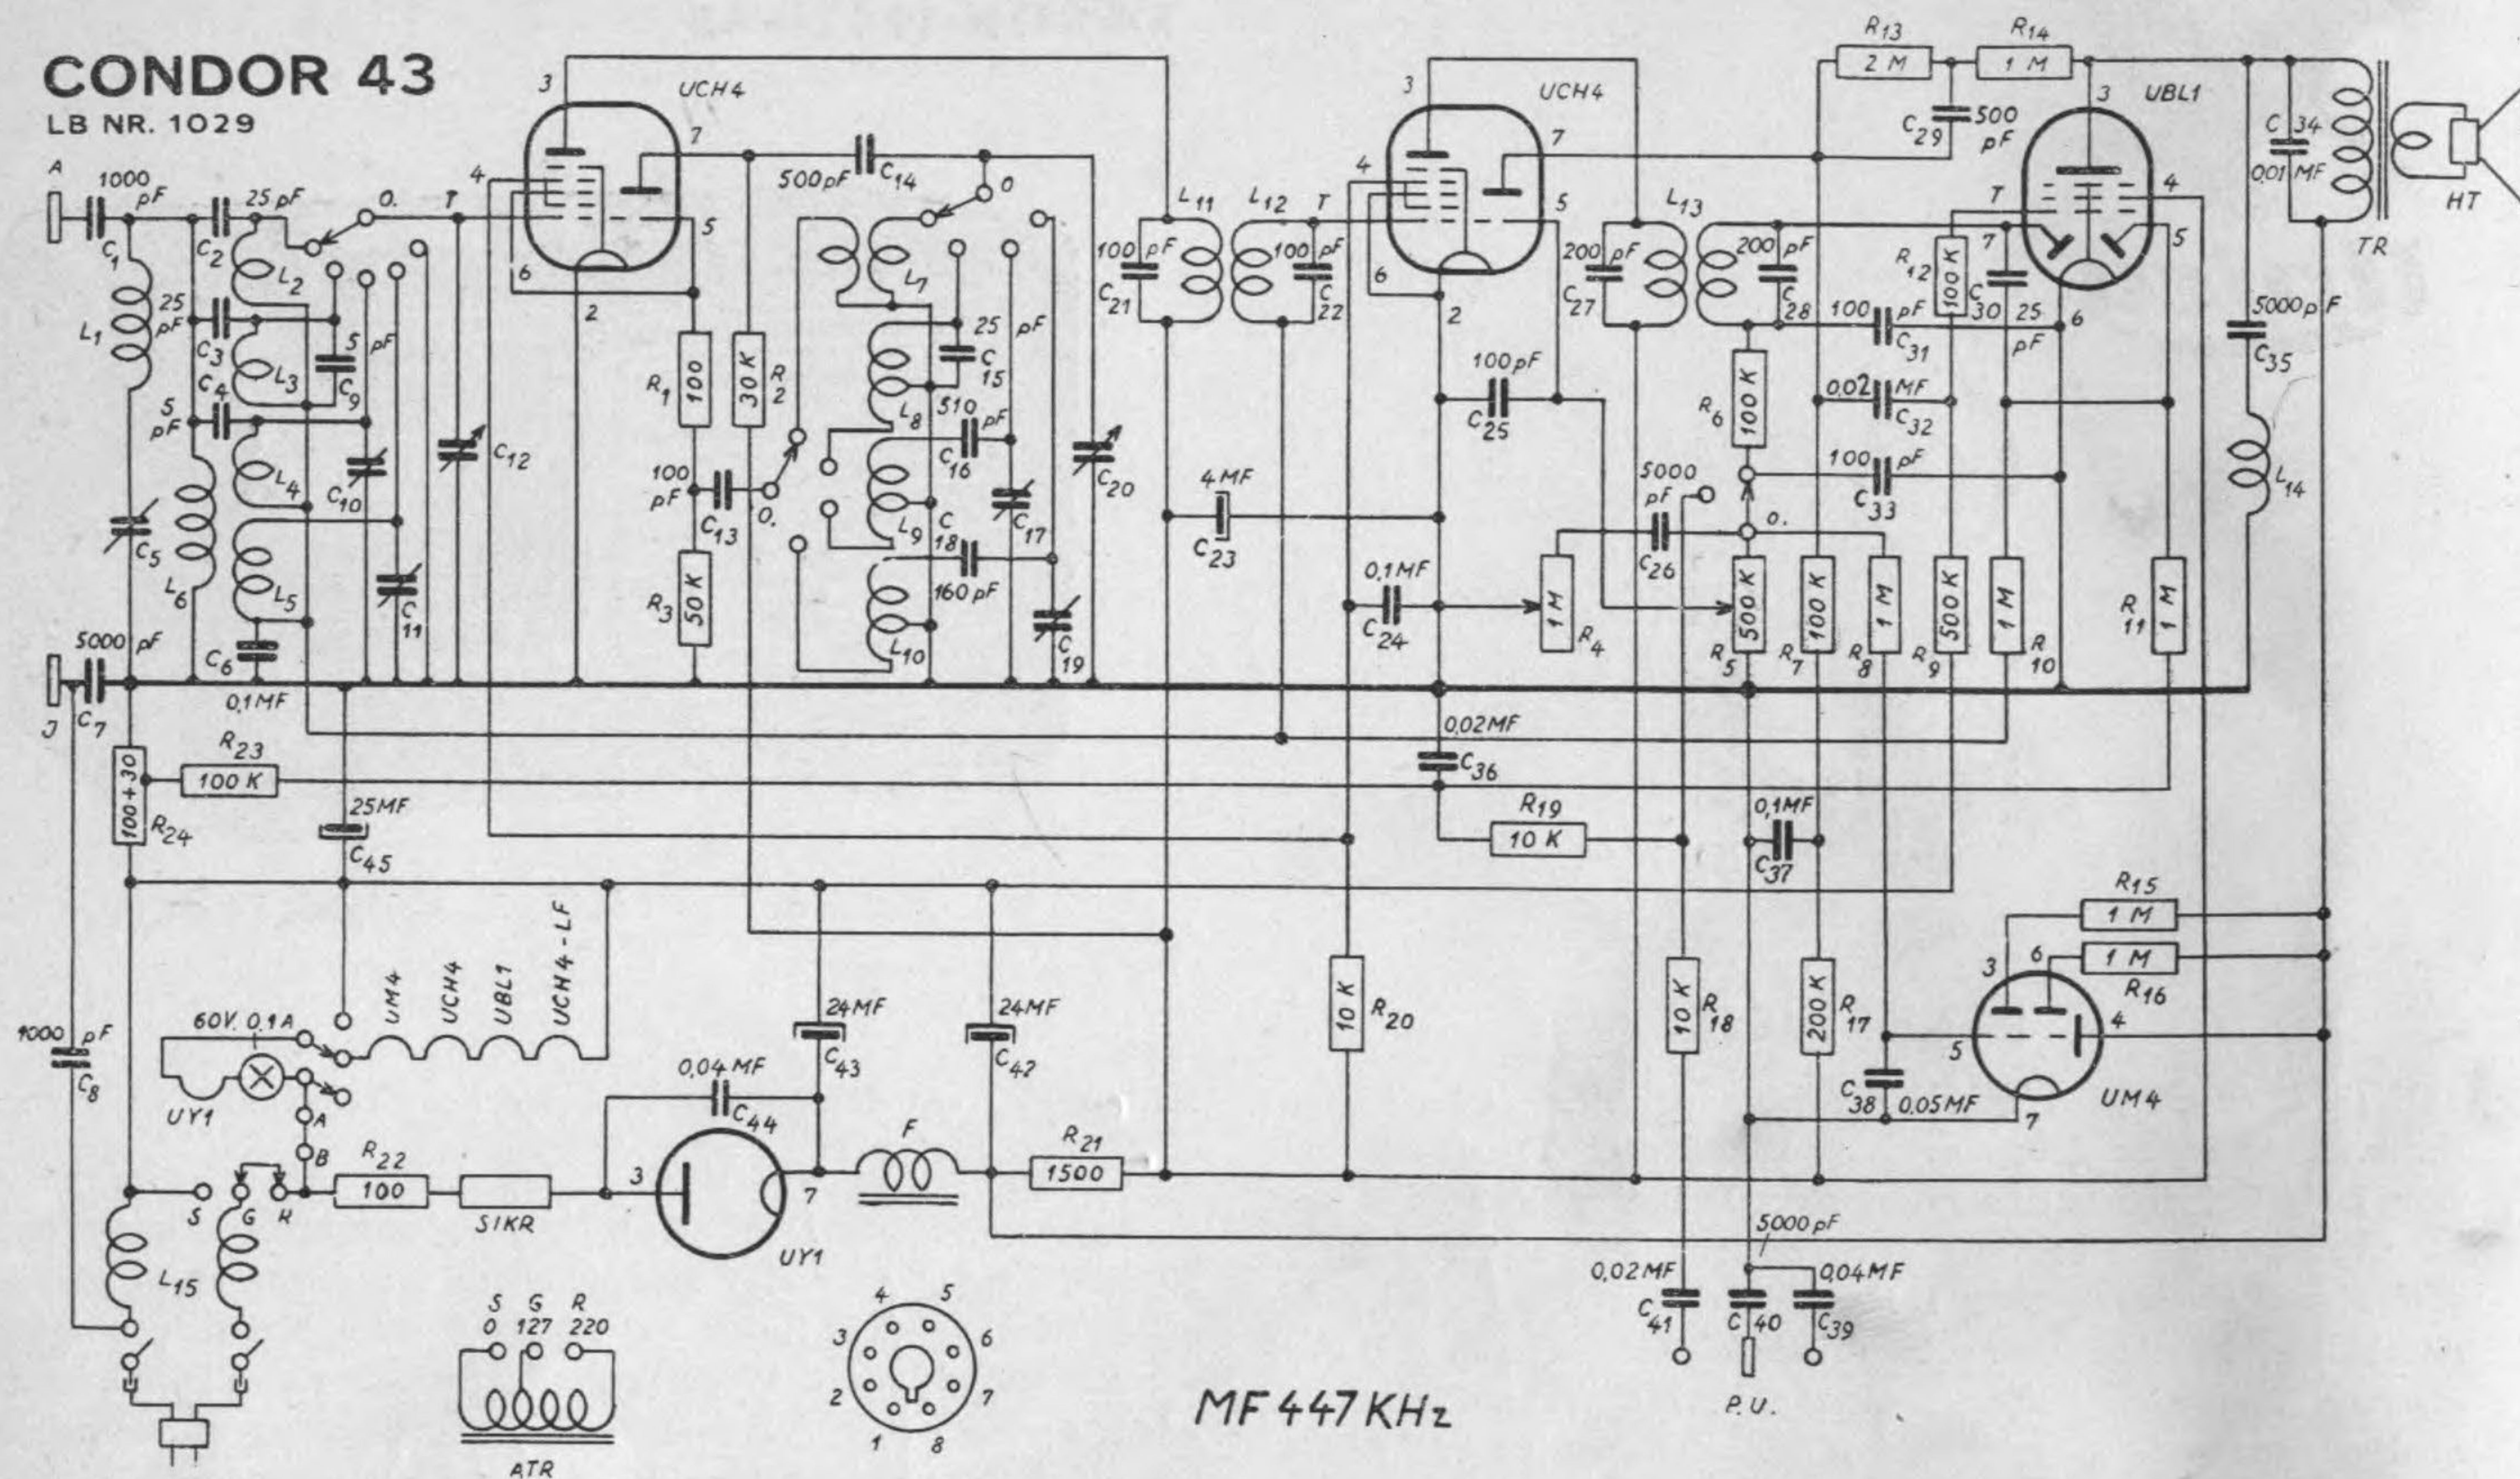

## SIGNATURFORTEGNELSE

C 1	Kondensator	1000 pF - 2000 V Vekselst.	535	C 36	Kondensator	0,02 Mf - 1500 V Jævnstr.	533	R 23	Modstand	100 K Ohm - 1/2 Watt	615
C 2	»	25 pF - 10 %	556	C 37	»	0,1 Mf - 1500 V Jævnstr.	533	R 24	»	100 + 30 Ohm - 3 Watt	516
C 3	»	25 pF - 10 %	556	C 38	»	0,05 Mf - 1500 V Jævnstr.	533	L 1	MF Sugekreds		281
C 4	»	4-5 pF - 20 %	564	C 39	»	0,04 Mf - 2000 V Vekselstr.	535	L 2	KB-1 Ant. Spole		286
C 5	Trimmer	35 - 90 pF	234	C 40	»	5000 pF - 2000 V Vekselstr.	535	L 3	KB 2		288
C 6	Kondensator	0,1 Mf - 1500 V Jævnstr.	533	C 41	»	0,02 Mf - 2000 V Vekselstr.	535	L 4	MB		271
C 7	»	5000 pF - 2000 V Vekselst.	535	C 42-43	Elektrolyt	2x24 Mf - 350 V Jævnstr.	491	L 5	LB		272
C 8	»	1000 pF - 2000 V Vekselst.	535	C 44	Kondensator	0,04 Mf - 2000 V Vekselstr.	535	L 6	MB-LB Ant. Kobl. Spole		271
C 9	»	4-5 pF - 20 %	564	C 45	Elektrolyt	25 Mf - 25 V Jævnstr.	488	L 7	KB-1 Osc. Spole		287
C 10-17	4x Trimmer	5-60 pF - 5-60 pF	236	R 1	Modstand	100 Ohm - 1/2 Watt	615	L 8	KB-2		289
C 11-19		35-100 pF, 35-100 pF.		R 2	»	30 K Ohm - 1 Watt	616	L 9	MB		274
C 12-20	Var. Kond.	2x420 pF	201	R 3	»	50 K Ohm - 1/2 Watt	615	L 10	LB		275
C 13	Kondensator	100 pF - 10 %	566	R 4	Tonekontrol	1 M Ohm - Aksel 51 m/m	671	L 11	1' MF. Primær		282
C 14	»	500 pF - 1500 V Jævnstr.	533	R 5	Styrkekontrol	500 K Ohm - Aksel 61 m/m	670	L 12	1' MF. Sekundær		283
C 15	»	25 pF - 10 %	556	R 6	Modstand	100 K Ohm - 1/2 Watt	615	L 13	2' MF. Transformator		284
C 16	»	510 pF - 2,5 %	571	R 7	»	100 K Ohm - 1/2 Watt	615	L 14	9 kHz Sugekreds		251
C 18	»	160 pF - 2,5 %	568	R 8	»	1 M Ohm - 1/2 Watt	615	L 15	Netstøjfilter		306
C 21	»	100 pF - 2,5 %	567 G	R 9	»	500 K Ohm - 1/2 Watt	615	O	Omstiller		713
C 22	»	100 pF - 2,5 %	567 G	R 10	»	1 M Ohm - 1/2 Watt	615	TR	Udgangstransformator, 3200/4 Ohm		388
C 23	Elektrolyt	4 Mf - 350 V Jævnstr.	492	R 11	»	1 M Ohm - 1/2 Watt	615	F	Filterspole		355
C 24	Kondensator	0,1 Mf - 1500 V Jævnstr.	533	R 12	»	100 K Ohm - 1/2 Watt	615	ATR	Autotransformator, 127-220 Volt Vekselstr.		382
C 25	»	100 pF - 1500 V Jævnstr.	533	R 13	»	2 M Ohm - 1/2 Watt	615	Sikr.	Sikring, 0,3 Amp.		651
C 26	»	5000 pF - 1500 V Jævnstr.	533	R 14	»	1 M Ohm - 1/2 Watt	615	HT	Højttaler, LK 340, u. Transformator		759
C 27	»	200 pF - 2,5 %	569 G	R 15	»	1 M Ohm - 1/2 Watt	615	A-B	Tilslutningssted for extra Modstand til		
C 28	»	200 pF - 2,5 %	569 G	R 16	»	1 M Ohm - 1/2 Watt	615		150 Volts Net. (200 Ohm - 15 Watt)		517
C 29	»	500 pF - 1500 V Jævnstr.	533	R 17	»	200 K Ohm - 1/2 Watt	615		Skallampe, 60 Volt - 0,1 Amp.		453
C 30	»	25 pF - 10 %	556	R 18	»	10 K Ohm - 1/2 Watt	615		Betjeningsknapper, Elfb.		782
C 31	»	100 pF - 10 %	566	R 19	»	10 K Ohm - 1/2 Watt	615		Stationsskala		43-828
C 32	»	0,02 Mf - 1500 V Jævnstr.	533	R 20	»	10 K Ohm - 1 Watt	616				
C 33	»	100 pF - 10 %	566	R 21	»	1500 Ohm - 3 Watt	515				
C 34	»	0,01 Mf - 2000 V Vekselst.	535	R 22	»	100 Ohm - 3 Watt	520				
C 35	»	5000 pF - 2000 V Vekselst.	535								

Opgiv altid Apparatets Fabrikationsnummer ved Bestilling af Reservedele.

# RUDOLPH SCHMIDT

GL. KONGEVEJ 64 (SVANHOLM) — TELEF. CENTRAL 5165  
KØBENHAVN V.