




## "SAILOR" H238

Anvendes når SAILOR CRY2001 forbindes til VHF SAILOR RT144B/C. Sættet består af håndsæt til mikrotelefonen fra SAILOR CRY2001 og mikrotelefonen fra VHF SAILOR RT144B/C samt en distress decoder, der monteres i VHF SAILOR RT144B/C.

To be used when SAILOR CRY2001 is connected to VHF SAILOR RT144B/C. The set consists of handset cradles for SAILOR CRY2001 and VHF SAILOR RT144B/C microtelephones, plus a distress decoder for mounting in the VHF SAILOR RT144B/C.

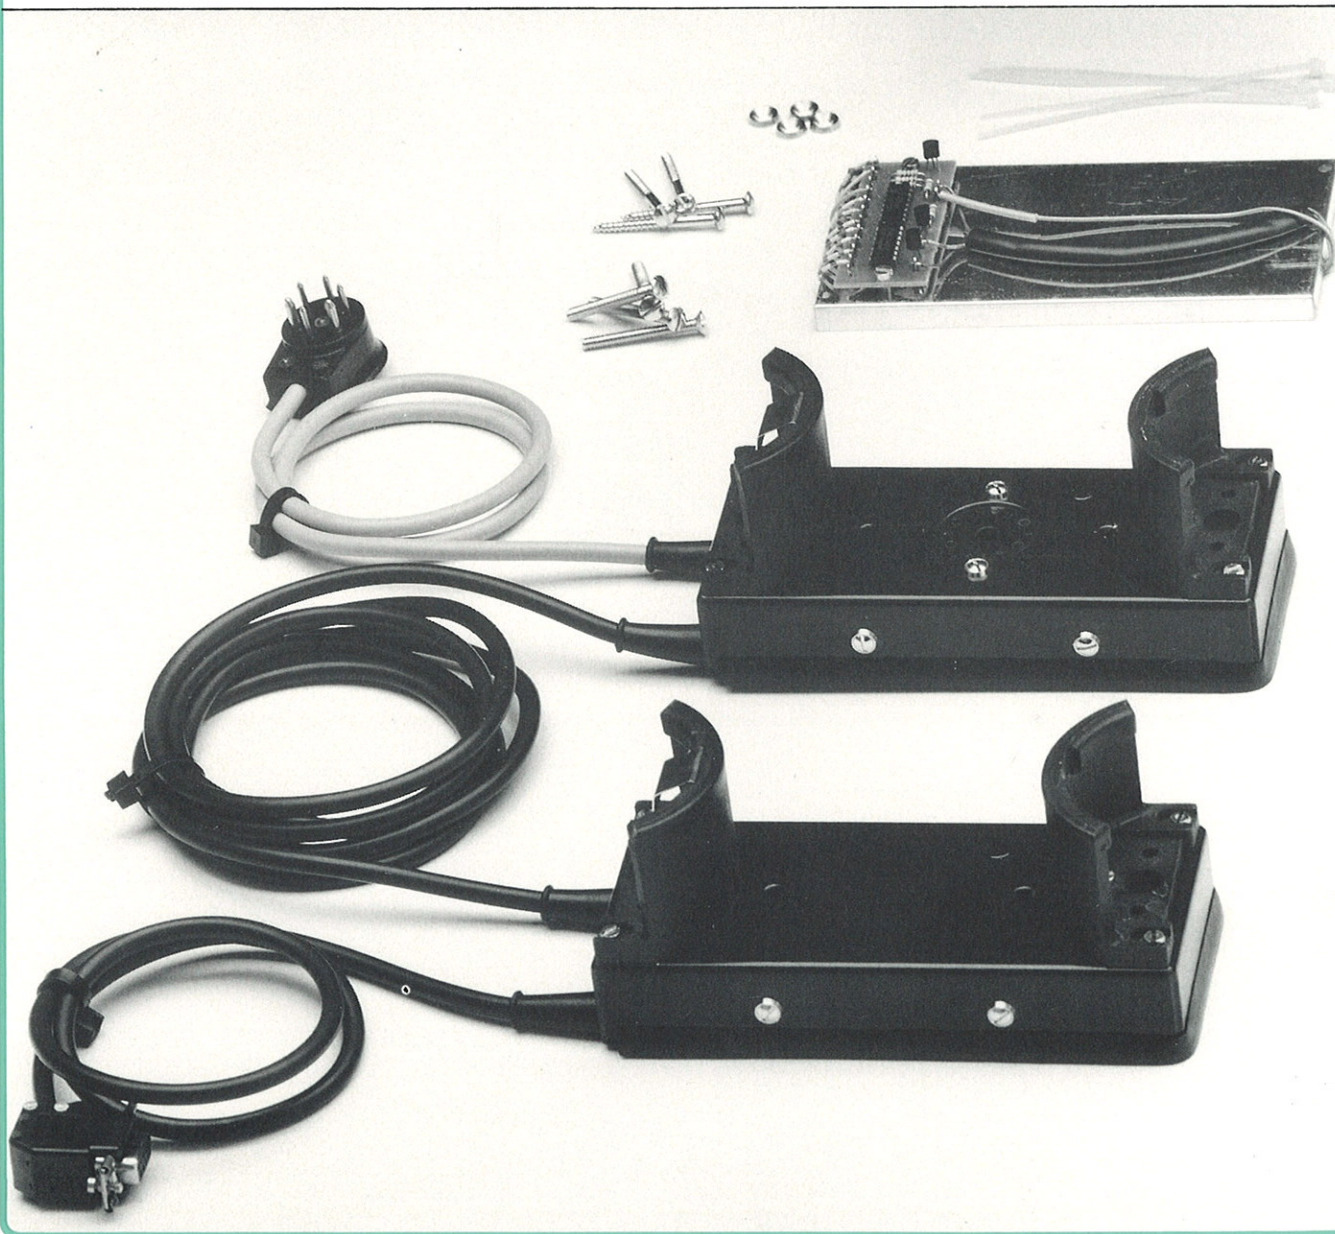






## "SAILOR" H239

Anvendes når SAILOR CRY2001 skal forbindes til VHF SAILOR RT143.

Sættet består af håndsæt til mikrotelefonen fra VHF SAILOR RT143 og håndsæt til mikrotelefonen fra SAILOR CRY2001 samt en distress decoder, der monteres i VHF SAILOR RT143.

To be used when SAILOR CRY2001 is to be connected to VHF SAILOR RT143.

The set consists of handset cradles for SAILOR CRY2001 and VHF SAILOR RT143 microtelephones, plus a distress decoder for mounting in the VHF SAILOR RT143.

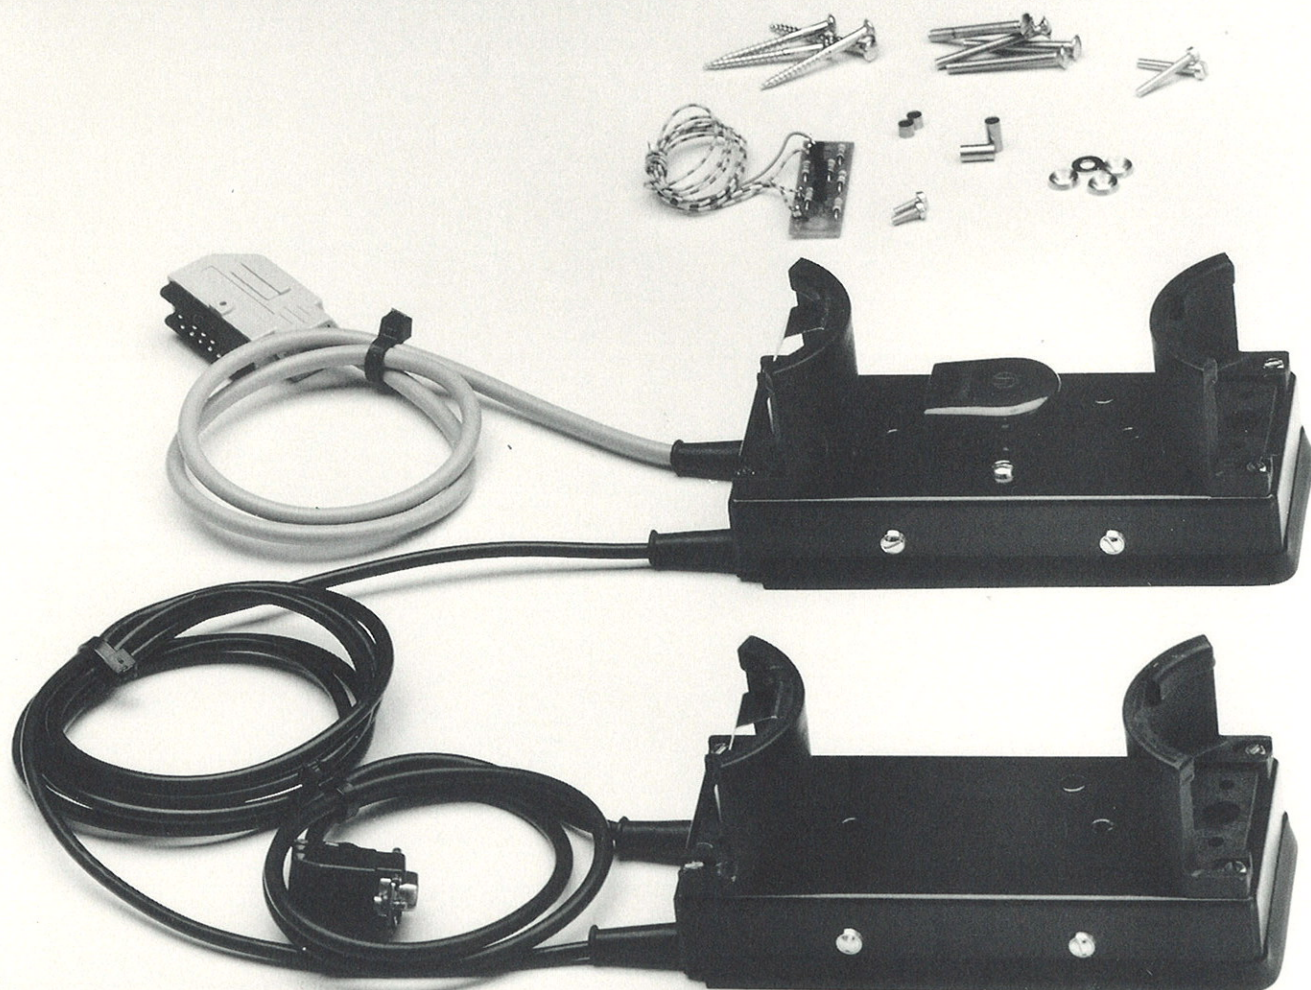



## "SAILOR" H240


Anvendes når SAILOR CRY2001 skal forbindes til Kysttelefonisenderne. SAILOR T121 - T122 - T124 - T126 - T128. Håndsættet anvendes til mikrotelefonen fra kysttelefonisenderne.

Der skal ikke anvendes distress decoder til senderne SAILOR T121 - T122 - T124 - T126 - T128, da der skal laves en forbindelse direkte fra 2182 krystalstyringen.

To be used when SAILOR CRY2001 is to be connected to Coast Telephony Transmitters SAILOR T121 - T122 - T124 - T126 - T128.

The handset cradle is used for the microtelephone from the coast telephony transmitters.

You do not use a distress decoder for the Transmitters SAILOR T121 - T122 - T124 - T126 - T128 as a direct connection is made from the 2182 crystal control.

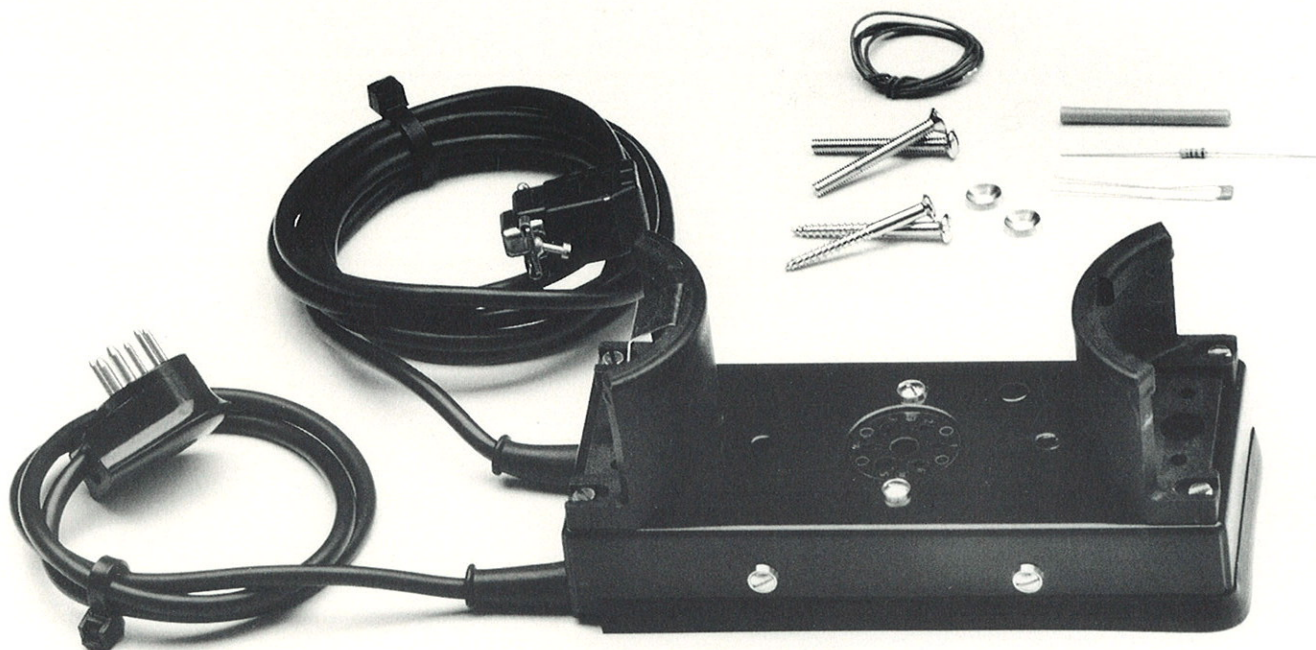





## "SAILOR" H241

Anvendes når SAILOR CRY2001 skal forbindes til Skanti's Kysttelefonisender TRP6000.

Holderen er til mikrotelefonen fra senderen.

Der skal ikke monteres distress decoder i senderen.

To be used when SAILOR CRY2001 is to be connected to Skanti's Coast Telephony Transmitter TRP6000.

The holder is for the microtelephone from the transmitter.

It is not necessary to mount a distress decoder in the transmitter.



## "SAILOR" H242

Anvendes når SAILOR CRY2001 skal forbindes til Kysttelefonisender SAILOR T122.


Håndsættet anvendes til mikrotelefonen fra kysttelefonisenderen SAILOR T122.

Der skal ikke anvendes distress decoder i SAILOR T122, da der skal laves en forbindelse direkte fra 2182 krystalstyringen.

To be used when SAILOR CRY2001 is to be connected to Coast Telephony Transmitter SAILOR T122.

The handset cradle is used for the microtelephone from the Coast Telephony Transmitter SAILOR T122.

It is not necessary to use a distress decoder in SAILOR T122 as a direct connection is made from the 2182 crystal control.

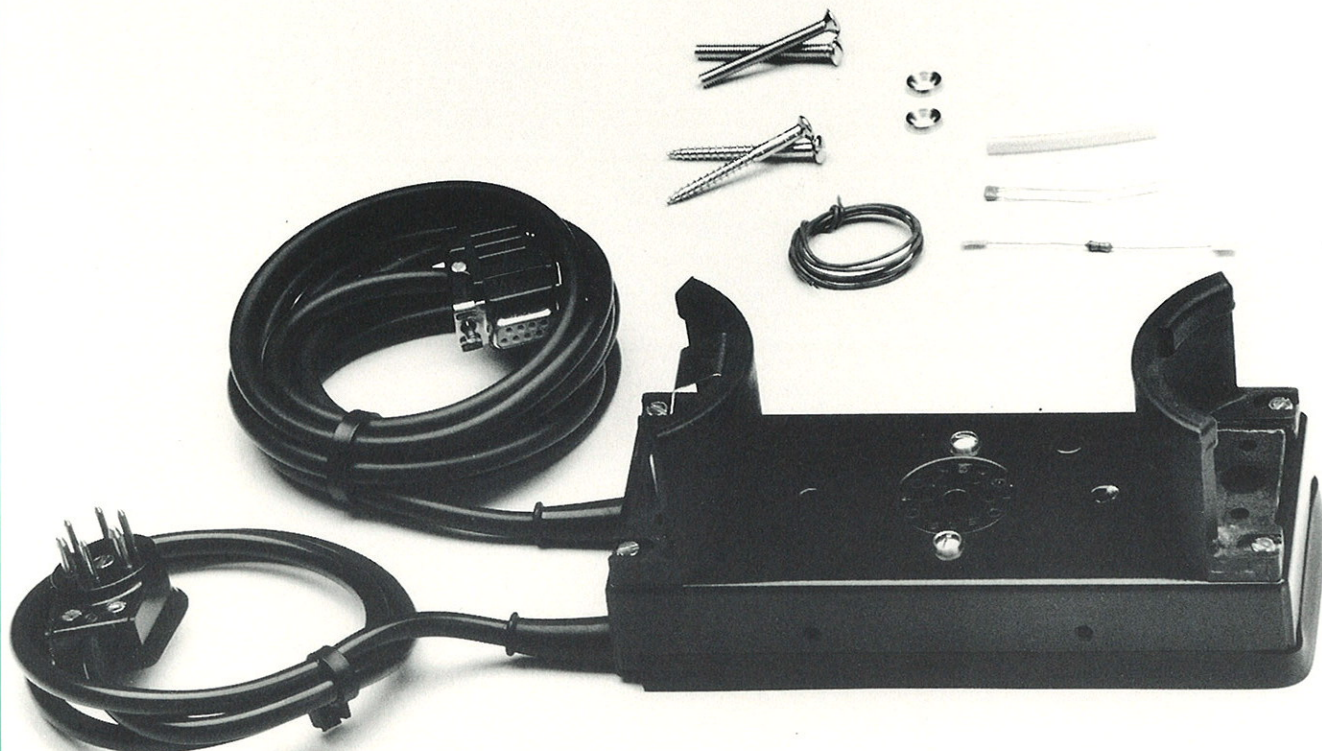





## "SAILOR" H421

Anvendes når SAILOR CRY2001 skal forbindes til Kontrolenhederne SAILOR C401 - C402 eller C403.

Sættet består af et hånd sæt, der anvendes til SAILOR CRY2001's mikrotelefon og en distress decoder, der monteres i kontrolenheden.

To be used when SAILOR CRY2001 is to be connected to the Control Units SAILOR C401 - C402 or C403.

The set consists of a handset cradle which is used for the microtelephone for SAILOR CRY2001 and a distress decoder for mounting in the control unit.

