


# Microphones & Conditioning



**Product Catalogue 2002**

**Brüel & Kjær** 

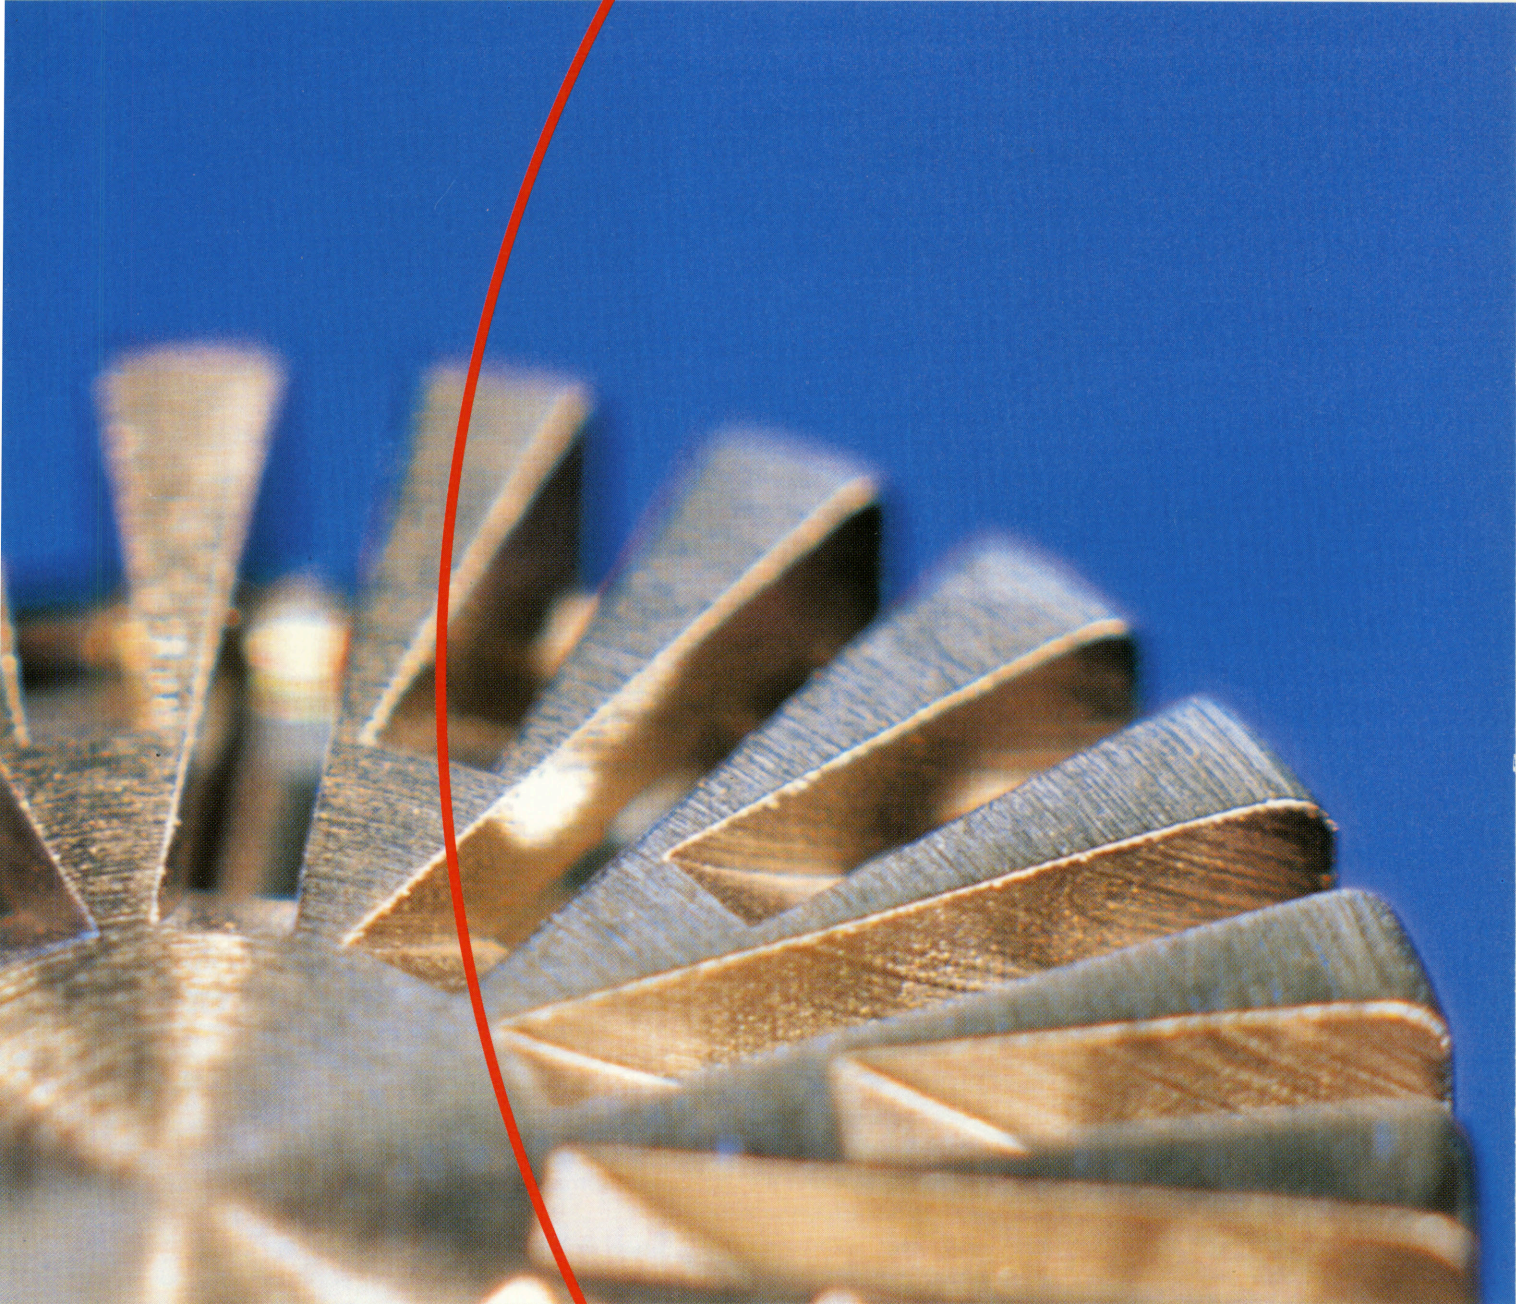

# WELCOME

*Welcome to Brüel & Kjær's Microphones & Conditioning Catalogue covering our full range of Microphones, Preamplifiers, Accessories, Hydrophones and Acoustic Conditioning Amplifiers. The products are sorted individually into easy to follow tables listing the most important specifications and making it easy for you to select the right product for your particular measurement needs.*

## Innovative Solutions

At Brüel & Kjær we are in the business of innovation. We always have been – from the first range of measurement microphones to the first multi-analyzer and the first Non-stationary STSF system. We're proud of this tradition and continue to develop and face the challenges posed to us by our customers. In fact we're focusing more and more on our customers' needs and in most instances supply whatever they need covering the whole measurement chain – from a single transducer to a complete turnkey system. This has, in part, been made possible by strategic alliances that enable us and our partners to find newer and more efficient ways for our customers to improve their products' quality and stay at the cutting edge of competitiveness. Technology has no limits – if our customers can imagine it then we can develop it.

## Wealth of Experience

Knowledge and experience go hand-in-hand and we have accumulated over 60 years' worth. In

fact, many of our employees are world-renowned experts in their respective fields and are often asked to speak at seminars, conferences, advise on new Standards, etc. But our expertise doesn't only come from within our organisation; it also comes from working closely together with our partners. In this way we can further our declared mission – to enhance the environment, the quality and the joy of life for everyone by improving sound and reducing vibration. With all this expertise we have been able to establish our knowledge centre – the Brüel & Kjær University – from which we can build and spread sound and vibration related knowledge worldwide for the benefit of our partners, employees and, not least, our customers.

## Top Quality

In all aspects of sound and vibration there are challenges to be met. For example, making sure that the car, bus or train that one takes to work each day can withstand the mechanical shocks imposed on it demands measurements of great accuracy and precision. This requires instruments with the per-



formance and quality to match. All our products are thoroughly tested, often in the harshest environmental conditions. Extremely high standards are met in all aspects of product and service provision, as reflected in our status as an ISO 9001 certified company. In fact, you'll find that our products usually come with a service period of 5 years after the end of production, such is their reliability, quality and robustness. And it is not only customer demands that need to be satisfied – legislation also sets exacting standards. This often means documented results that are traceable to known sources, such as a national calibration laboratory. And it goes without saying that the support customers receive must always be the most reliable they can find. If things go wrong, Brüel & Kjær is there.

## Brüel & Kjær's Vision

Our vision is to be the preferred partner and solution provider to all leading companies and institutions who care about sound and vibration, and be the global competence centre for sound and vibration.



# CONTENTS

Selecting the Right Microphone .....	1
Type of Sound Field .....	1
Dynamic Range .....	1
Frequency Response .....	1
Polarization .....	1
Standards .....	1
Microphones .....	2
Free-field Microphones .....	2
Diffuse-field Microphones .....	3
Special Microphones .....	4
TEDS Microphone/Preamplifier Combinations .....	7
Microphone Preamplifiers .....	9
Sound Intensity .....	12
Sound Intensity Probes .....	12
Sound Intensity Microphone Pairs .....	13
Dual Preamplifier .....	13
Comparison of Sound Intensity Calibrators .....	14
Cables for Microphones and Preamplifiers .....	15
Cable Length and Current Limitation in Preamplifiers .....	16
Microphone Accessories .....	17
Adaptors .....	17
Windscreens .....	17
Nose Cones .....	18
Outdoor Protection .....	18
Preamplifier Holders .....	19
Turbulence Screen .....	19
Corrector .....	19
Tripods .....	19
Electrostatic Actuators .....	20
Adaptors for Calibration .....	20
Miscellaneous .....	20
Hydrophones .....	21
Conditioning Amplifiers .....	22
Microphone Conditioning Amplifiers .....	23
Charge Conditioning Amplifiers .....	27
Calibration .....	29
Calibrators .....	29
Glossary of Acoustical Terms .....	30
Index .....	33
Type Number Index .....	34
Sales and Service Worldwide .....	36





1	1.1 Selecting the Right Microphone
1	1.2 Type of Sound Field
1	1.3 Dynamic Range
1	1.4 Frequency Response
1	1.5 Polarization
1	1.6 Standards
2	2. Microphones
2	2.1 Free-field Microphones
2	2.2 Diffuse-field Microphones
2	2.3 Special Microphones
2	2.4 IEC Microphone/Receiver Combinations
2	2.5 Microphone Preamplifiers
2	2.6 Sound Intensity
2	2.7 Sound Intensity Probes
2	2.8 Sound Intensity Microphone Pairs
2	2.9 Dual Preamplifier
2	2.10 Comparison of Sound Intensity Calibration
2	2.11 Codes for Microphones and Preamplifiers
2	2.12 Cable Length and Current Limitation in Preamplifiers
2	2.13 Microphone Accessories
2	2.14 Adapters
2	2.15 Windcreens
2	2.16 Noise Cans
2	2.17 Outdoor Protection
2	2.18 Preamplifier Housings
2	2.19 Turbulence Screens
2	2.20 Connectors
2	2.21 Shields
2	2.22 Electronic Actuators
2	2.23 Actuators for Calibration
2	2.24 Miscellaneous
2	2.25 Hydrophones
2	2.26 Underwater Amplifiers
2	2.27 Microphone Conditioning Amplifiers
2	2.28 Charge Conditioning Amplifiers
2	2.29 Calibration
2	2.30 Theory of Acoustical Terms
2	2.31 Index
2	2.32 Typographical Index
2	2.33 Notes and Service Worldwide



# SELECTING THE RIGHT MICROPHONE

When selecting a measurement microphone, it is important to understand the measurement requirements and the demands they impose on the microphone. This is necessary because, although measurement microphones are precision instruments that are optimised for particular measurement tasks, they still offer a wide operational range. In fact, such is the versatility of Brüel & Kjær microphones, that you might be tempted into a "that one will do" philosophy when selecting a microphone, simply because a microphone comes within the required general performance parameters. However, if you have a good understanding of the measurement requirement, it is possible to choose the best microphone for the measurement task in hand.

## Type of Sound Field

A good way of narrowing down the choice of microphone is to consider the type of sound field in which the measurements are being made. For measurements made away from reflecting surfaces or in acoustically well-damped indoor environments, e.g., when making outdoor measurements with a sound level meter or in an office providing a lot of natural acoustic damping, a free-field microphone is clearly best. But for measurements made in small closed couplers or close to hard, reflective surfaces, a pressure-field microphone is more appropriate. An example of this could be, for example, a set of pressure-sensing microphones positioned at different points across an aircraft wing. A complete picture of the pressure variations across the wing surface can then be established. For measurements in enclosed areas where reverberation is likely, pressure-field microphones adapted for random-incidence measurements are best. This is because the random-incidence response of a pressure-field microphone is much "flatter" or constant across the frequency range, than that of a free-field response microphone.

## Dynamic Range

The lower limit of the dynamic range is dictated by the inherent noise of the microphone and preamplifier combination. The upper limit of the dynamic range is dictated by the maximum sound pressure level (3% total harmonic distortion). Due to the very wide dynamic range of the microphone, it is normally either the lower or the upper limit of the dynamic range that is of interest.

## Frequency Response

Although particular types of microphone are optimised for particular purposes, they still have a wide operational frequency range. The frequency range is very interdependent with other parameters and the frequency response should therefore be considered in relation to other selection requirements such as the type of sound field and the dynamic range.

## Polarization

There are two different types of microphone construction, one that employs an external voltage supply to polarize the backplate to the diaphragm air gap (externally polarized), and one where the polarization charge is stored in an electret layer on the backplate of the microphone (prepolarized). Generally there are only small differences between the specifications for externally polarized and prepolarized microphones, but these differences make them suitable for different purposes. Prepolarized microphones are used for portable sound level meters and with DeltaTron® preamplifiers. Prepolarized microphones also offer slightly better performance in very humid environments. Externally polarized microphones are generally more useful for general field and laboratory use and for high-temperature measurements. And for special measurements, externally polarized microphones offer a broader range to choose from.

## Standards

Abbreviations used for Standards in the Tables

	IEC 61094-4		IEC 61672		ANSI
A	IEC 61094-4 WS1F	I	IEC 61672 Class 1	K	ANSI S1.4 Type 1
B	IEC 61094-4 WS2F	J	IEC 61672 Class 2	L	ANSI S1.4 Type 2
C	IEC 61094-4 WS3F			M	ANSI S1.12 Type M
D	IEC 61094-4 WS1P				
E	IEC 61094-4 WS2P				
F	IEC 61094-4 WS3P				
G	IEC 61094-1 LS1P				
H	IEC 61094-1 LS2P				

It is also worth considering other parameters such as phase response, venting, environmental exposure and documentation.



# MICROPHONES

## Free-field Microphones


Free-field microphones are particularly suitable for making measurements away from reflecting surfaces, e.g., when making outdoor measurements with a sound level

meter, or in an acoustically well-damped indoor environment, e.g., in an office with natural acoustic damping.



Type Number		4939	4130	4176	4188	4189	4190
Diameter	inch	1/4	1/2	1/2	1/2	1/2	1/2
Optimised		Free-field	Free-field	Free-field	Free-field	Free-field	Free-field
Standards		C	J	I, K	I, K	B, I, L	B, I, L
Nominal Open-circuit Sensitivity	mV/Pa	4	10	50	31.6	50	50
Polarization Voltage*	V	200	28	0	0	0	200
Optimised Frequency Response $\pm 2$ dB	Hz	4 to 100000	6.5 to 8000	7 to 12500	8 to 12500	6.3 to 20000	3.15 to 20000
Dynamic Range with Preamplifier Type	dB(A) to dB	35 to 164 (2670)	33 to 142 (2642)	14 to 142 (2669)	15.8 to 146 (2669)	15.2 to 146 (2669)	15 to 147 (2669)
Inherent Noise	dB (A)	28	13.5	13.5	14.2	14.6	14.5
Capacitance	pF	6.1	14	12.5	12	13	16
Venting		Side	Rear	Rear	Rear	Rear	Rear
Lower Limiting Frequency ( $-3$ dB)	Hz	0.3 to 3	0.5 to 5	0.5 to 5	1 to 5	2 to 4	1 to 2
Operating Temperature Range	°C	-40 to 150	-30 to 100	-30 to 100	-30 to 125	-30 to 150	-30 to 150
Temperature Coefficient	dB/°C	+0.003	-0.007	-0.004	+0.005	-0.001	-0.007
Pressure Coefficient	dB/kPa	-0.007	-0.02	-0.02	-0.021	-0.01	-0.01
Preamplifier Included		No	No	No	No	No	No

\* 0 V = Prepolarized microphone



Type Number		4191	4145
Diameter	inch	1/2	1
Optimised		Free-field	Free-field
Standards		B, I, L, M	A, I
Nominal Open-circuit Sensitivity	mV/Pa	12.5	50
Polarization Voltage*	V	200	200
Optimised Frequency Response $\pm 2$ dB	Hz	3.15 to 40000	2.6 to 18000
Dynamic Range with Preamplifier Type	dB(A) to dB	21.4 to 161 (2669)	10.2 to 146 (2669)
Inherent Noise	dB (A)	20	10
Capacitance	pF	18	66
Venting		Side	Rear
Lower Limiting Frequency ( $-3$ dB)	Hz	1 to 2	1 to 2
Operating Temperature Range	°C	-30 to 300	-30 to 100
Temperature Coefficient	dB/°C	-0.002	-0.002
Pressure Coefficient	dB/kPa	-0.007	-0.015
Preamplifier Included		No	No

\* 0 V = Prepolarized microphone

Earlier Microphones	Compatible Brüel & Kjær Microphones
4133	4191
4134	4192
4135	4939
4136	4938
4147	4193
4155	4189
4165	4190
4166	4943



# Diffuse-field Microphones

A diffuse-field microphone, also called a random-incidence microphone, is designed to have a flat response when signals arrive simultaneously from all directions. They should, therefore, not only be used for making-measurements in reverberation chambers, but also in all

situations where the sound field is diffuse, or where several sources contribute to the sound pressure at the measurement position. Examples include indoor measurements where the sound is reflected by walls, ceilings, and objects in the room, or measurements made inside a car.



Type Number		4942	4943
Diameter	inch	1/2	1/2
Optimised		Diffuse-field	Diffuse-field
Standards		K	K
Nominal Open-circuit Sensitivity	mV/Pa	50	50
Polarization Voltage*	V	0	200
Optimised Frequency Response $\pm 2$ dB	Hz	6.3 to 16000	3.15 to 10000
Dynamic Range with Preamplifier Type	dB(A) to dB	15.2 to 146 (2669)	15.9 to 147 (2669)
Inherent Noise	dB (A)	14.6	15.5
Capacitance	pF	13	16
Venting		Rear	Rear
Lower Limiting Frequency ( $-3$ dB)	Hz	2 to 4	1 to 2
Operating Temperature Range	$^{\circ}$ C	$-40$ to 150	$-40$ to 150
Temperature Coefficient	dB/ $^{\circ}$ C	$-0.001$	$-0.010$
Pressure Coefficient	dB/kPa	$-0.01$	$-0.008$
Preamplifier Included		No	No

\* 0 V = Prepolarized microphone



## Pressure-field Microphones

A pressure-field microphone is appropriate for making measurements in small, closed couplers or close to hard, reflective surfaces, for example, a set of pressure-sensing

microphones positioned at different points across an aircraft wing. A complete picture of the pressure variations across the wing surface can then be established.



Type Number		4138	4938	4944	4947	4192	4144
Diameter	inch	1/8	1/4	1/4	1/2	1/2	1
Optimised		Pressure-field	Pressure-field	Pressure-field	Pressure-field	Pressure-field	Pressure-field
Standards		–	F	F	K	E, K, M	D, L
Nominal Open-circuit Sensitivity	mV/Pa	1	1.6	1	12.5	12.5	50
Polarization Voltage*	V	200	200	0	0	200	200
Optimised Frequency Response $\pm 2$ dB	Hz	6.5 to 140000	4 to 70000	4 to 70000	8 to 10000	3.15 to 20000	2.6 to 8000
Dynamic Range with Preamplifier Type	dB(A) to dB	52.2 to 168 (2670/UA 0160)	42 to 172 (2670)	46 to 170 (2670)	21.4 to 160 (2669)	20.7 to 161 (2669)	10 to 146 (2669)
Inherent Noise	dB (A)	43	30	30	17.5	19	9.5
Capacitance	pF	3.5	6.1	5	14	18	55
Venting		Side	Side	Side	Rear	Side	Side
Lower Limiting Frequency ( $-3$ dB)	Hz	0.5 to 5	0.3 to 3	0.3 to 3	1 to 5	1 to 2	1 to 2
Operating Temperature Range	°C	–30 to 100	–40 to 150	–40 to 150	–30 to 125	–30 to 150	–30 to 100
Temperature Coefficient	dB/°C	–0.01	+0.003	+0.008	+0.006	–0.002	–0.003
Pressure Coefficient	dB/kPa	–0.01	–0.003	–0.003	–0.006	–0.007	–0.016
Preamplifier Included		No	No	No	No	No	No

\* 0 V = Prepolarized microphone

## Special Microphones

Our special microphones include microphones optimised for calibration, low-noise, low-frequency, array, outdoor, probe and high-level applications.

**Calibration Microphone Types 4160 and 4180** are high-quality condenser microphones intended for use as laboratory standard microphones, and in laboratory coupler applications where high accuracy and long-term stability are essential.

**Low-noise Microphone Type 4179** is suitable for monitoring very low background noise levels down to  $-5.5$  dB(A) together with Preamplifier Type 2660.

**Low-frequency Microphone Type 4193** is designed to measure infrasound, for example, in ship engine rooms, in helicopters and in wind-buffeted buildings.

**Array Microphone Type 4935** is suitable for systems requiring a large number of microphones, e.g., for STSF

measurements, especially those that require excellent phase-matching, e.g., Non-stationary STSF and beam-forming measurements. For a larger frequency range see Type 4944 A.

**Outdoor Microphone Types 4184 and 4198** offer excellent protection against wind and rain when measuring outdoors.

**Probe Microphone Type 4182** has a choice of probe tubes, stiff or flexible, making it perfect for measurements in awkward places.

**High Sound Pressure Microphones** are used for gunshots, fireworks and rocket testing. Some microphones can be exposed to maximum pressure of 201 dB peak.

**High Static Pressure Microphone Type 4938-W-001** is specially designed for measuring in high static pressure from



1–10 Atm. The change in response at different static pressures has been minimised.

**Airbag Microphone Type 4938-WB1418** is designed to fulfil “Microphone and Preamplifier System for measuring acoustic impulses within vehicles – SAE J247 FEB87”, but only when combined with Preamplifier Type 2670-WB1419.

**Piezoelectric microphones** measure high intensity acoustic noise and very low pressure fluctuations. Rugged, hermetically-sealed construction and a wide temperature range –67°F to +500°F (–55°C to +260°C) make them ex-

tremely suitable for a wide range of environmental conditions.

**Piezoresistive microphones’** high sensitivity and high resonance make them ideal for measuring dynamic pressure. Model 8507C is designed for installations that don’t require threaded mounting, and can be installed in difficult-to-reach locations. Its small size permits flush mounting on curved surfaces. Model 8510B is designed for a variety of aerospace, automotive and industrial measurements that require a combination of small size, high sensitivity, and wideband frequency response.




Type Number		4180	4160	4179	4193	4193/ UC0211	4935
Diameter	inch	1/2	1	1	1/2	1/2	1/4
Optimised		Calibration	Calibration	Low-noise	Low-frequency	Low-frequency	Array
Standards		H	G	–	E, K, M	E, K, M	–
Nominal Open-circuit Sensitivity	mV/Pa	12.5	47	100	12.5	2	5.6
Polarization Voltage*	V	200	200	200	200	200	0
Optimised Frequency Response ±2 dB	Hz	4 to 20000	2.6 to 8000	10 to 10000	0.07** to 20000	0.13 to 20000	50 to 5000
Dynamic Range with Preamplifier Type	dB(A) to dB	21 to 160 (2669)	10 to 146 (2673)	–2.5 to 102 (2660)	20.7 to 161 (2669)	26 to 148 (2669)	32 to 140
Inherent Noise	dB (A)	18	9.5	–5.5	19	29	35
Capacitance	pF	17.5	55	40	18	118	N/A
Venting		Side	Side	Side	Side	Side	Front
Lower Limiting Frequency (–3 dB)	Hz	1 to 3	1 to 2	5 to 7	0.01 to 0.05	<0.1	<50
Operating Temperature Range	°C	–30 to 100	–10 to 50	–30 to 100	–30 to 150	–30 to 150	–10 to 55
Temperature Coefficient	dB/°C	–0.002	+0.003	–0.004	–0.002	–0.002	–
Pressure Coefficient	dB/kPa	–0.007	–0.0016	–0.016	–0.005	–0.005	–
Preamplifier Included		No	No	No	No	No	DeltaTron
TEDS UTID		–	–	–	–	–	769

\* 0 V = Prepolarized microphone

\*\* Preamplifier-dependent (with 2669 ≈ 0.3 Hz)



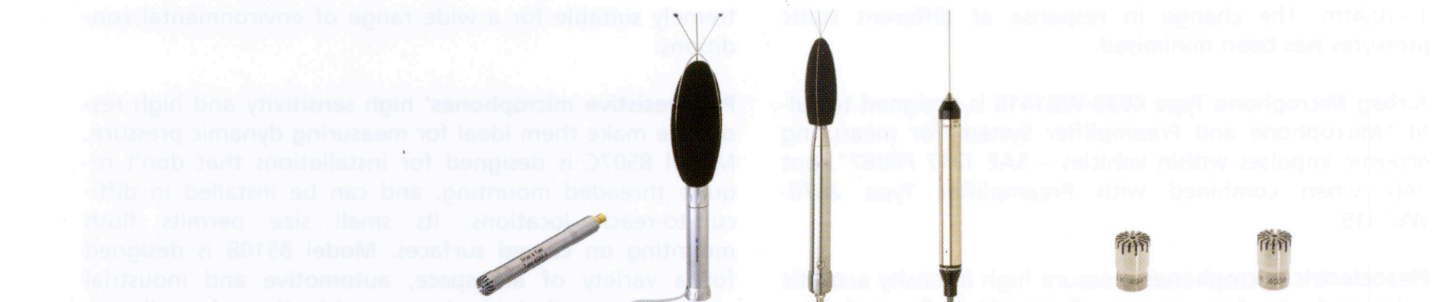

Type Number		4944 A	4198	4184	4182	4941	4938-W-001
Diameter	inch	1/4	1/2	Probe	Probe	1/4	1/4
Optimised		Array	Outdoor	Outdoor Permanent	Probe	High-pressure	High static pressure
Standards		–	I, K	I, K	–	–	–
Nominal Open-circuit Sensitivity	mV/Pa	1	50	12.5	3.16	0.09	1.6
Polarization Voltage*	V	0	0	200	200	200	200
Optimised Frequency Response $\pm 2$ dB	Hz	16 to 70000	6.3 to 16000	20 to 8000	1 to 20000	4 to 20000	4 to 70000
Dynamic Range with Preamplifier Type	dB(A) to dB	48 to 169	15.2 to 146	25 to 140	42 to 164	73.5 to 184 (2670)	42 to 172 (2670)
Inherent Noise	dB (A)	48	15.2	25	42	59	30
Capacitance	pF	N/A	N/A	N/A	N/A	3.3	6.1
Venting		Side	Rear	Yes	Selected	Side	Side
Lower Limiting Frequency ( $-3$ dB)	Hz	7 to 9	2 to 4	<20	< 0.7	0.3 to 3	0.3 to 3
Operating Temperature Range	°C	–20 to 60	–25 to 60	–40 to 55	–10 to 700	–40 to 150	–40 to 150
Temperature Coefficient	dB/°C	+0.008	–0.001	–0.005	–0.005	–	+0.003
Pressure Coefficient	dB/kPa	–0.003	–0.01	–0.006	–0.007	–	–0.003
Preamplifier Included		DeltaTron	Yes	Yes	Yes	No	No

\* 0 V = Prepolarized microphone



Type Number		4938-WB 1418	2510, EE 0205	2510M4E, EE 0206	8507 C-2, EE 0158	8510 B-1, EE 0161	8510 B-2, EE 0162
Diameter	inch	1/4	0.816	0.816	0.092	0.159	0.159
Optimised		Airbag	Piezoelectric	Piezoelectric	Piezoresistive	Piezoresistive	Piezoresistive
Standards		–	–	–	–	–	–
Nominal Open-circuit Sensitivity	mV/Pa	1.6	–	–	0.014	0.45	0.45
Polarization Voltage*	V	200	N/A	N/A	N/A	N/A	N/A
Optimised Frequency Response $\pm 2$ dB	Hz	0.5 to 70000	1 to 10000	1 to 10000	0 to 20000	0 to 16000	0 to 20000
Dynamic Range with Preamplifier Type	dB(A) to dB	50 to 177 (2670 WB 1419)	100 to 180	100 to 180	80 to 197	78 to 197	80 to 197
Inherent Noise	dB (A)	30	N/A	N/A	N/A	N/A	N/A
Capacitance	pF	6.1	N/A	N/A	N/A	N/A	N/A
Venting		Side	N/A	N/A	N/A	N/A	N/A
Lower Limiting Frequency ( $-3$ dB)	Hz	0.05 to 0.2	<0.7 Hz	<0.7 Hz	0 Hz	0 Hz	0 Hz
Operating Temperature Range	°C	–40 to 150	–54 to 260	–54 to 260	–54 to 107	–54 to 121	–54 to 121
Temperature Coefficient	dB/°C	+0.003	–	–	–	–	–
Pressure Coefficient	dB/kPa	–0.003	–	–	–	–	–
Preamplifier Included		No	N/A	N/A	N/A	N/A	N/A

\* 0 V = Prepolarized microphone




TEDS Microphone/Preamplifier Combinations

The new range of microphones with Transducer Electronic Data Sheets (TEDS) according to IEEE 1451.4, and enabling automatic detection and identification, covers free-field, pressure-field and diffuse-field microphones. They are available as 1/8-inch, 1/4-inch and 1/2-inch and cover almost any application. They can be connected to an ever-increasing range of instruments including Portable PULSE™ Front-end, NEXUS™ Conditioning Amplifier (Embedded Software Version 2.0 or later) and a PC, 16-ch. Conditioning Amplifier Type 2694, 4-ch. Power Supply Type 2829 or 8-ch. Signal Conditioning Card 482 for OA-SIS and provide:

- Plug and Play facilities
- Significantly reduced setup time
- Virtual elimination of cable connection errors
- Identification of transducer location that can be read into the microphone
- Automatic setting of transducer sensitivity in the conditioning unit
- Maximisation of the A/D converter's dynamic range

The TEDS microphone is sealed to the preamplifier with a calibration sticker. Recalibration is available and we can offer attractive prices on transducer/preamplifier combinations.

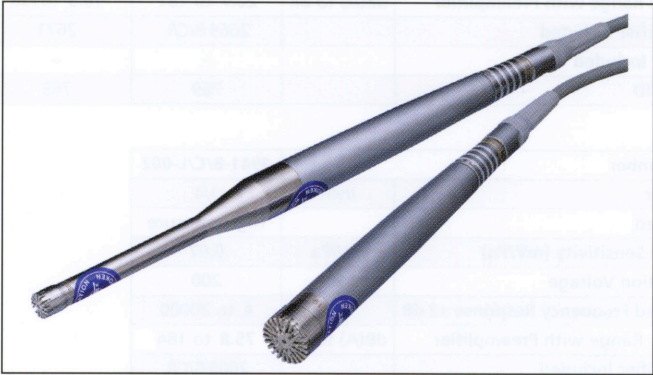

**TEDS**  
Template Name: Microphone, integrated preamplifier (UTID, Universal Template Identification 769)  
Data available:  
Manufacturer, Type number, Serial number  
Calibration date, Sensitivity, Polarization

Type Number		4939-A-011	4939-B/C/L-002	4188-A-021	4188-B/C/L-001	4189-A-021	4189-B/C/L-001
Diameter	inch	1/4	1/4	1/2	1/2	1/2	1/2
Optimised		Free-field	Free-field	Free-field	Free-field	Free-field	Free-field
Nominal Sensitivity (mV/Pa)	mV/Pa	4	3.6	31.6	31.6	50	50
Polarization Voltage	V	200	200	DeltaTron	0	DeltaTron	0
Optimised Frequency Response ±2 dB	Hz	4 to 100000	4 to 100000	20 to 12500	8 to 12500	20 to 20000	6.3 to 20000
Dynamic Range with Preamplifier	dB(A) to dB	35 to 164	35 to 164	19 to 141	15.8 to 146	16.5 to 138	15.2 to 146
Preamplifier Included		2670	2669B/C/L	2671	2669B/C/L	2671	2669B/C/L
Adaptor Included		–	UA 0035	–	–	–	–
TEDS UTID		769	769	769	769	769	769

Type Number		4190-B/C/L-001	4191-B/C/L-001	4138-A-015	4138-B/C/L-006	4938-A-011	4938-B/C/L-002
Diameter	inch	1/2	1/2	1/8	1/8	1/4	1/4
Optimised		Free-field	Free-field	Pressure-field	Pressure-field	Pressure-field	Pressure-field
Nominal Sensitivity (mV/Pa)	mV/Pa	50	12.5	0.6	0.8	1.6	1.4
Polarization Voltage	V	200	200	200	200	200	200
Optimised Frequency Response ±2 dB	Hz	3.15 to 20000	3.15 to 40000	6.5 to 140000	6.5 to 140000	4 to 70000	4 to 70000
Dynamic Range with Preamplifier	dB(A) to dB	15 to 147	21.4 to 161	52.2 to 168	55 to 168	42 to 172	42 to 172
Preamplifier Included		2669 B/C/L	2669 B/C/L	2670	2669 B/C/L	2670	2669 B/C/L
Adaptor Included		–	–	UA 0160	UA 0036	–	UA 0035
TEDS UTID		769	769	769	769	769	769



Type Number		4192-B/C/L-001	4942-A-021	4942-B/C/L-001	4943-B/C/L-001	4193-B/C/L-004	4941-A-011
Diameter	inch	1/2	1/2	1/2	1/2	1/2	1/4
Optimised		Pressure-field	Diffuse-field	Diffuse-field	Diffuse-field	Low-frequency	High-pressure
Nominal Sensitivity (mV/Pa)	mV/Pa	12.5	50	50	50	1.9	0.08
Polarization Voltage	V	200	DeltaTron	0	200	200	200
Optimised Frequency Response $\pm 2$ dB	Hz	3.15 to 20000	20 to 16000	6.3 to 16000	3.15 to 10000	0.16 to 20000	4 to 20000
Dynamic Range with Preamplifier	dB(A) to dB	20.7 to 161	16.5 to 138	15.2 to 146	15 to 147	26 to 148	73.5 to 184
Preamplifier Included		2669 B/C/L	2671	2669 B/C/L	2669 B/C/L	2669 B/C/L	2670
Adaptor Included		–	–	–	–	UC 0211	–
TEDS UTID		769	769	769	769	769	116289

Type Number		4941-B/C/L-002
Diameter	inch	1/4
Optimised		High-pressure
Nominal Sensitivity (mV/Pa)	mV/Pa	0.07
Polarization Voltage	V	200
Optimised Frequency Response $\pm 2$ dB	Hz	4 to 20000
Dynamic Range with Preamplifier	dB(A) to dB	75.8 to 184
Preamplifier Included		2669 B/C/L
Adaptor Included		UA 0035
TEDS UTID		116289




# MICROPHONE PREAMPLIFIERS

The microphone preamplifiers share a robust and acoustically improved design, that allows them to operate in a wide range of environmental conditions. Their high output current capacity enables the use of extremely long extension cables, even with high sound pressure levels at high frequency.

In principle, microphone preamplifiers have more or less identical electrical characteristics, i.e., a gain of unity and a frequency range of a few Hz to more than 200 kHz. The most obvious difference between preamplifiers is their diameter, the most common being 1/2-inch. For acoustical reasons, it is usual to select a preamplifier with the same diameter as the microphone used. Brüel & Kjær produce 1/2-inch and 1/4-inch preamplifiers. Adaptors are available to connect these to 1/8-inch or 1-inch microphones.

Apart from diameter, other important selection parameters include the transmission principle, (for example, current, voltage or digital signals) system verification facilities, phase characteristics, inherent noise and current supply requirements. Some preamplifiers are optimised for a specific application e.g., airbag measurements or very low noise measurements.

Most microphone preamplifiers are supplied with the TEDS Template Microphone Preamplifier UTID 1025 included. With a microphone attached to the preamplifier, the user can use a TEDS editor (e.g., WA0876, WA0877) to remap a new template, such as UTID 769, for the complete assembly into the preamplifier.

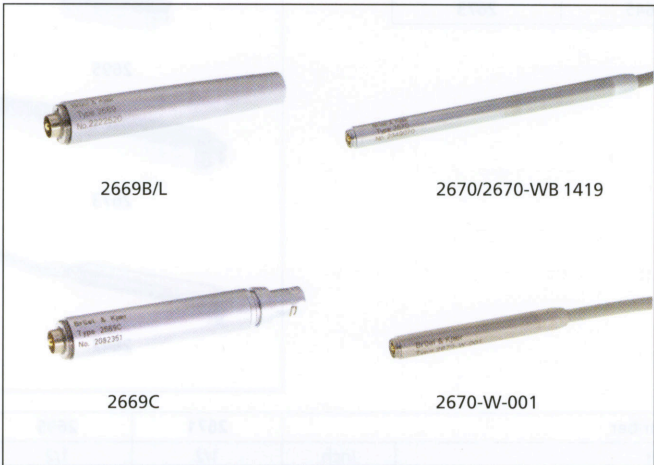


Type Number		2669B	2669L	2669C	2670	2670-W-001	2670-WB 1419
Diameter	inch	1/2	1/2	1/2	1/4	1/4	1/4
Optimised		Acoustical	Acoustical	Cylindrical	Phase	Short, 48 mm	Airbag
Connector at Preamplifier		LEMO 0B, 7-pin	LEMO 0B, 7-pin	LEMO 1B, 7-pin	Fixed (2 m)	Fixed (0.6)	Fixed (2 m)
Connector at Instrument/Cable		B&K, 7-pin	LEMO 1B, 7-pin	None	LEMO 1B, 7-pin	LEMO 1B, 7-pin	LEMO 1B, 7-pin
Calibration Facility		CIC	CIC	CIC	CIC	CIC	None
Polarization Voltage Support		Yes	Yes	Yes	Yes	Yes	Yes
Supply Voltage	V	± 14 to ± 60 or 28 to 120	± 14 to ± 60 or 28 to 120	± 14 to ± 60 or 28 to 120	± 14 to ± 60 or 28 to 120	± 5 to ± 20 or 10 to 40*	± 14 to ± 60 or 28 to 120
Max. Output Voltage (Peak)	V	55 (10 below supply)	55 (10 below supply)	55 (10 below supply)	55 (10 below supply)	15	55 (10 below supply)
Max. Output Current (Peak)	mA	20	20	20	20	17	20
Frequency Range	Hz	3 to 200000 ± 0.5 dB (15 pF)	3 to 200000 ± 0.5 dB (15 pF)	3 to 200000 ± 0.5 dB (15 pF)	15 to 200000 ± 0.5 dB (6.2 pF)	15 to 200000 ± 0.5 dB (6.2 pF)	1 to 100000 ± 1 dB (6.2 pF)
Attenuation	dB	< 0.35	< 0.35	< 0.35	< 0.4	< 0.4	11
Noise A-weighted, typical	uV	1.9	1.9	1.9	4	4	4
Noise 22.4 Hz to 300 kHz, typical	uV	8.2	8.2	8.2	14	14	14
Input Impedance	GΩ  pF	15  0.3	15  0.3	15  0.3	15  0.25	15  0.25	15  15
TEDS UTID		1025 from serial number 2221155	1025 from serial number 2221155	1025 from serial number 2221155	1025 from serial number 2248944	No	1025 from serial number 2248944

\* Note: The warranty does not cover Preamplifier 2670-W-001 if used at a supply voltage >40 V



Earlier Preamplifiers	Compatible Brüel & Kjær Preamplifiers
2619	2669
2627	2673
2633	2670
2639	2669
2645	2673

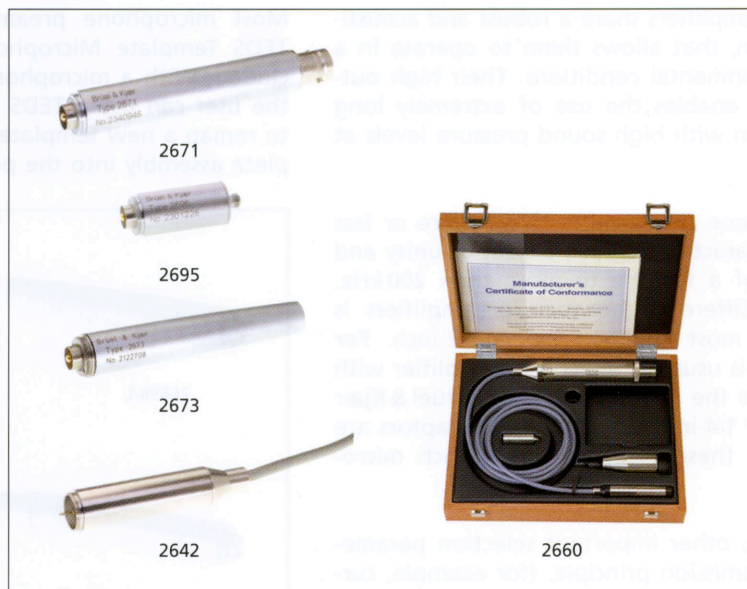

Type Number		2671	2695	2673	2642	2660
Diameter	inch	1/2	1/2	1/4	1/2	1/2
Optimised		DeltaTron®	Short DeltaTron	Calibration	Battery	Low-noise
Connector at Preamplifier		BNC	10–32 UNF	LEMO 0B, 7-pin	Fixed	None
Connector at Instrument/Cable		None	None	LEMO 1B, 7-pin	LEMO 0B, 4-pin	B&K, 7-pin
Calibration Facility		None	None	IVC	None	None
Polarization Voltage Support		No	No	Yes	Yes up to 28 V	Yes
Supply Voltage	V	28	28	± 14 to 60 or 28 to 120	30 to 36	120 and 12
Max. Output Voltage (Peak)	V	7	7	55 (10 V below supply)	4.5	45
Max. Output Current (Peak)	mA	19	19	19	0.1	1.5
Frequency Range	Hz	20 to 50000 ± 2 dB (12 pF)	20 to 50000 ± 2 dB (15 pF)	3 to 200000 ± 0.5 dB (20 pF)	35 to 20000 ± 0.5 dB (14 pF)	20 to 200000 ± 1 dB (0 dB)(47 pF)
Attenuation	dB	< 0.35	< 0.2	< 0.05	< 3	< 0.06
Noise A-weighted, typical	µV	4	4	1.8	7.2	0.8
Noise 22.4 Hz to 300 kHz, typical	µV	15	12	11	20	5
Input Impedance	GΩ  pF	1.5    0.4	1.7    0.4	1    0.05	1    3	36    0.3
TEDS UTID		1025 from serial number 2264319	1025	No	No	No



# DeltaTron Preamplifier Solutions Versus Standard Preamplifier Solutions

DeltaTron preamplifiers offer:

- Use of the vibration condition input
- Use of long, inexpensive, BNC co-axial cables
- Use of prepolarized microphones only
- TEDS

Standard microphone preamplifiers offer:

- Remote monitoring e.g., charge injection or insert voltage
- Very high output voltage that enables high sound pressures
- Use of external polarized microphones that enable use in high temperatures
- Use of prepolarized microphones
- Use of long cables
- TEDS



Model	Frequency Range	Output Voltage	Input Impedance	Power Consumption
3502	20 Hz to 20 kHz	100 mV	100 kΩ	100 mW
3503	20 Hz to 20 kHz	100 mV	100 kΩ	100 mW



# SOUND INTENSITY

The measurement of sound intensity provides information on the magnitude and the direction of the sound energy in the sound field. The measurement technique is used for a variety of applications such as the determination of sound power, sound absorption and sound transmission. Sound intensity is calculated from the quotient of the sound pressure and the particle velocity; sound pressure can easily be measured directly but the particle velocity is usually determined by a finite difference approximation. This requires two phase matched microphones in a face-to-face configuration. Brüel & Kjær provides a number of sound intensity probes that conform to Class 1 in the Sound Intensity Instrumentation Standard, IEC 61043, which describes the characteristics of microphone pairs, intensity probes and calibration techniques for intensity measurements.



## Sound Intensity Probes

Two sound intensity probes are available – Type 3595 for use with the sound intensity analysis system based on sound level meter Type 2260, and Type 3599, suitable for use with sound intensity analyzers based on PULSE. The main difference is that Type 3595 is based on a 10-pin

cabling system whereas Type 3599 is based on an 18-pin cabling system and includes a remote control unit. The acoustical specifications are the same as both use Sound Intensity 1/2-inch Microphone Pair Type 4197 and Dual Preamplifier Type 2683.

Type Number	3595	3599
Standards	IEC 61043 Class 1	IEC 61043 Class 1
Microphones	4197	4197
Dual Preamplifier	2683	2683
Remote Control Unit	–	ZH 0632
Spacer Length	6 to 200 mm	6 to 200 mm
Spacers Included	8.5 mm Spacer 250 Hz to 6.3 kHz; 12 mm Spacer 250 Hz to 5 kHz; 50 mm Spacer 20 Hz to 1.25 kHz	8.5 mm Spacer 250 Hz to 6.3 kHz; 12 mm Spacer 250 Hz to 5 kHz; 50 mm Spacer 20 Hz to 1.25 kHz



3595



3599




Sound Intensity Microphone Pairs



Type Number		4197	4178
Diameter	inch	1/2	1/4
Free-field Frequency Response $\pm 1$ dB	Hz	5 to 12500	6 to 14000
Free-field Frequency Response $\pm 2$ dB	Hz	0.3 to 20000	4 to 100000
Phase Response Difference (Absolute Value) 1/3-octave Centre Frequencies		< 0.05°: 20 Hz to 250 Hz < f(Hz)/5000: 250 Hz to 6.3 kHz	< 0.2°: 20 Hz to 1 kHz Estimated f(kHz) $\times$ 0.2°: 1 kHz to 10 kHz
Amplitude Response Difference Normalized at 200 Hz		< 0.2 dB: 20 Hz to 1 kHz < 0.4 dB: 20 Hz to 7.1 kHz	< 0.2 dB: 20 Hz to 2 kHz < 0.3 dB: 2 Hz to 10 kHz
Accessories Included		8.5 mm Spacer UC 5349 12 mm Spacer UC 5269 50 mm Spacer UC 5270	6 mm Spacer UC 0196 12 mm Spacer UC 0195
Polarized Capacity Difference	pF	< 1.0	< 0.3

Dual Preamplifier



Type Number	2683
Phase Matching	< 0.015° at 50 Hz (20pF mic. capacitance) f(kHz) $\times$ 0.06°: 250 Hz to 10 kHz
Electrical Noise re Microphone Sensitivity:	
1/4-inch 6.4 pF Dummy	39.2 dB SPL(A)
1/2-inch 19.5 pF Dummy	19.4 dB SPL(A)
Attenuation for 1/2-inch Microphones	Ch.A Typ.: 0.6 dB, Ch.B Typ.: 0.3 dB
Attenuation for 1/4-inch Microphones	Ch.A Typ.: 1.7 dB, Ch.B Typ.: 0.7 dB



# Sound Intensity Calibrators

Requirements for laboratory and field use are different. Brüel & Kjær, therefore, offers two instruments for sound intensity calibration; Type 3451 for laboratory use and Type 4297 for field use. Both calibrators fulfil IEC 61043, 1993 Class 1.

## Comparison of Sound Intensity Calibrators

Type Number		3541	4297
Main Application		In the laboratory	In the field
Dismantling of Probe		Necessary	Unnecessary (up to 3 kHz)
Calibration of Sound Intensity Level	$L_I$	Yes	No
Calibration of Sound Pressure Level	$L_p$	Yes	Yes
Calibration of Particle Velocity Level	$L_v$	Yes	No
Pressure-Residual Intensity Index	$L_p - L_I$	20 to 50 kHz	20 to 3 kHz with spacer 20 to 6.3 kHz without spacer
Spacings Accommodated		Irrelevant as spacer must be removed from probe	Probe must be based on 12 mm spacer
Sound Pressure Source		Separate pistonphone	Integrated
Noise Generator		Separate pink and white noise generator	Integrated pink noise generator
Microphones Accomodated	inch	1/4 and 1/2	1/2
Number of Mechanical Parts		4	1








# CABLES FOR MICROPHONES AND PREAMPLIFIERS

LEMO 0B to LEMO 1B Connector (7-pin) Flexible Silicone Cable, diameter 4 mm (-60 to 150°C)	AO 0419: 3.0 m, 90 pF/m EL 4006 and AC 0219-X: Variable length	
LEMO 0B to B&K connector (7-pin) Flexible Silicone Cable, diameter 4 mm (-60 to 150°C)	AO 0428: 3.0 m, 90 pF/m EL 4005 and AC 0219-X: Variable length	
Extension Cables LEMO 1B to 1B Connector Pur cable, robust, excellent shielding (-20 to 80°C), diameter 4 mm	AO 0414: 3.0 m, 95 pF/m AO 0415: 10 m, 95 pF/m AO 0416: 30 m, 95 pF/m EL 4004-V and AC 0289-X: Variable length	
Extension Cables B&K 7-pin to B&K 7-pin	AO 0027: 3.0 m, 95 pF/m, diameter 6 mm AO 0028: 10 m, 57 pF/m, diameter 9 mm AO 0029: 30 m, 57 pF/m, diameter 9 mm	
Cables B&K Female to LEMO 1B Connector	AO 0488: 3.0 m, 95 pF/m EL 4025: 0.2 m, 95 pF/m	
Flat Cable LEMO 1B to LEMO 1B Connector Shielded 7-core, thickness 0.2 mm	AR 0014: 0.5 m	
Single Screened BNC to BNC Co-axial Cables	AO 0087: 1.2 m AO 0142: 3 m AO 0430: 10 m	
Double Screened BNC to BNC Co-axial Cables	AO 0429: 1.2 m AO 0426: 3 m AO 0427: 10 m	



10–32 UNF to BNC Connector (2695)	AO 0531: 5 m	
Cable SMB–BNC (4944 A and 4935)	AO 0587: 3 m, straight WL 1320: X m, variable length, straight	
	AO 0564: 10 m, right angle	

## Cable Length and Current Limitation in Preamplifiers

The current limitation in preamplifiers should be considered when high frequencies, long cables and relatively high signal levels are combined. The relation between the maximum sound pressure level, the frequency and cable load for a given current capability is given by the following formula:

$$SPL_{\text{peak}}(\text{max}) = 94 + 20 \log \left( \frac{i_{\text{peak}}}{2\pi \cdot f \cdot C_L \cdot S_c \cdot p_0} \right) [\text{dB}]$$

where:

$i_{\text{peak}}$  = maximum current capacity of the preamplifier or (if lower) of the power supply in ampere

$C_L$  = total capacitive load presented by the connection cable in farad. Typically 50 to 100 pF/m

$S_c$  = loaded sensitivity of the microphone in V/Pa

$p_0$  = pressure level for stated microphone sensitivity = 1 Pa

$f$  = applied maximum frequency

Example with 1000 meter of cable:

$i_{\text{peak}} = 20 \text{ mA}$ ,  $S_c = 12.5 \text{ mV/Pa}$ ,  $f = 20 \text{ kHz}$ ,  $C_L = 95 \text{ nF}$  (1000 m, 3000 feet (95 pF/m))

$SPL_{\text{peak}}(\text{max}) = 136 \text{ dB}$



# MICROPHONE ACCESSORIES

## Adaptors

**Adaptors for Mounting Preamplifiers and Extension Rods with Microphones of Different Diameters**

UA 0786: 1/1-inch microphone to 1/2-inch preamplifier, Insert Voltage possibility

DB 0375: 1/1-inch microphone to 1/2-inch preamplifier

UA 0035: 1/4-inch microphone to 1/2-inch preamplifier (driven shield 0.33 pF)

WA 0371: 1/4-inch microphone to 1/2-inch preamplifier, short version (driven shield 0.08 pF)

UA 0036: 1/8-inch microphone to 1/2-inch preamplifier (driven shield 0.46 pF)

UA 0160: 1/8-inch microphone to 1/4-inch preamplifier (driven shield 2.44 pF)

**Flexible Adaptors 1/4- to 1/2- inch and Flush Mountings for 1/4- and 1/2-inch Microphones**

UA 0122: right angle (driven shield 1.25 pF)

UA 0123: straight (driven shield 1.25 pF)

**Flexible Extension Rod**

UA 0196: 1/2-inch to 1/2-inch 210 mm (driven shield 0.22 pF)

**Right Angle Adaptor**

EU 4000: 1/4-inch to 1/4-inch (driven shield 0.97 pF)

UA 1260: 1/2-inch to 1/2-inch

## Windscreens

The windscreen is made of specially prepared, open-pored polyurethane foam attenuating wind noise 10 to 12 dB at lower wind velocities, and is suited for hand-

held outdoor sound measurements. The windscreen is simply pushed as far as it will go over the microphone (fitted with its normal protection grid) and preamplifier.

**Windscreen Order Numbers**

UA 0207: For 1-inch microphones, spherical, diameter 90 mm, hole 20 mm

UA 0237: For 1/2-inch microphones, spherical, diameter 90 mm, hole 10 mm

UA 0459: For 1/2-inch microphones, spherical, diameter 65 mm, hole 10 mm

WQ 1099: For 1/4-inch microphones, spherical, diameter 65 mm, hole 5 mm

WQ 1133: For 1/4-inch microphones, ellipse 38 x 55 mm, hole 5 mm

UA 1070: Windscreen for 4184

UA 1071: Windscreen holder for 4184

UA 0253: 6 units of UA 0207

UA 0254: 6 units of UA 0237

UA 0469: 6 units of UA 0459


UA 0570: Windscreen for 1/2-inch microphone with holder and bird spike




## Nose Cones

Nose cones are designed to reduce the aerodynamically induced noise present when the microphone is exposed to high wind speeds in a known direction, for example, during sound measurements in wind tunnels, ducts, etc. They replace the normal protection grid of the microphone, and have a streamlined shape with a highly polished surface giving the least possible resistance to air

flow and thereby reducing the noise produced by the presence of the microphone itself. The fine wire mesh around the nose cone permits sound pressure transmission to the microphone diaphragm while a truncated cone behind the mesh reduces the air volume in front of the diaphragm.


Nose Cone Order Numbers				
UA 0387: 1/1-inch				
UA 0386: 1/2-inch				
UA 0385: 1/4-inch				
UA 0355: 1/8-inch				

## Outdoor Protection

Outdoor Protection				
UA 1404: Outdoor Microphone Kit for Preamplifiers 2669, 2671, 2673 and Sound Level Meters 2236, 2237, 2238, 2239 and 2260				
DB 3611: Extension for UA 1404 – makes it possible to mount the preamplifier from Sound Level Meter Type 2231 inside Outdoor Kit UA 1404				
UA 0308: Dehumidifier used with back-vented 1/2-inch microphones with nickel diaphragms				
UA 0393: Rain cover with built in actuator				



## Preamplifier Holders

<b>Preamplifier Holders</b> UA 1317 Preamplifier Holder to be used with 1/2-inch preamplifiers together with a camera tripod. The holder can be swivelled and locked at any angle between +90° and -90° from the vertical	 <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <span>UA 1317</span> <span>UA 1588</span> <span>UA 1254</span> <span>UA 1284</span> </div>
UA 1588: Preamplifier Holder to be used with 1/4-inch preamplifiers together with a camera tripod (e.g., UA 1317)	
UA 1254: Microphone Holder for Tripod (2671, 2669C SLM preamplifiers)	
UA 1284: Microphone Stand for 2669B/L	


## Turbulence Screen

Turbulence Screen UA 0436 is designed to attenuate turbulence noise when measuring airborne noise in ducts, wind tunnels etc. The UA 0436 can be used with any 1/2-


inch free-field condenser microphone mounted on a 1/2-inch microphone preamplifier.

UA 0436: For suppression of turbulence during noise measurements with 1/2-inch microphones inside air ducts	
---	--

## Corrector

DZ 9566: Random Incidence Corrector gives Types 4130/76/88 a flat random response for measurements in diffuse sound fields	
--	---


## Tripods

<b>Tripods</b> UA 0587: Heavy Duty Tripod for Type 3923 Rotating Boom UA 0801: Lightweight Tripod with tilt head, max. 1332 mm UA 0803: Tripod for photocells and microphones, max. 1250 mm UA 0989: Tripod with pan and tilt head for Type 8329 UA 1251: Lightweight Tripod for Type 2236, compact UA 1577: Tripod including CAM head (scanning laser)	
---	--



## Electrostatic Actuators

Electrostatic Actuators				
UA 0023: For 1-inch microphones				
UA 0033: For 1/2-inch microphones				
Actuator Adaptors				
DB 0264: For 1/4-inch microphones, use with UA 0033				
DB 0900: For 1/8-inch microphones, use with UA 0033				



UA 0023



UA 0033



DB 0264




DB 0900

## Adaptors for Calibration

Adaptors for Calibration			
DP 0776: Adaptor (for 1/2-inch microphones)			
DP 0775: Adaptor (for 1/4-inch microphones)			
DP 0774: Adaptor (for 1/8-inch microphones)			



DP 0776



DP 0775



DP 0774

## Miscellaneous

Miscellaneous			
ZG 0350: LEMO to 7-pin Brüel & Kjær adaptor for connecting cables with LEMO 1B connector to instruments with B & K 7-pin connectors			
UA 1405: CIC Adaptor, LEMO to B&K is an adaptor similar to ZG 0350 with a BNC to mini-jack cable of 1.5 m to inject CIC to the preamplifier			
WB 0850: Insert Voltage or CIC Junction Unit			
ZG 0328: BNC to B&K 7-pin, provides DeltaTron supply from microphone 7-pin supply			
WB 1421: BNC to LEMO, provides DeltaTron supply from microphone LEMO supply			
WB 1452: microdot to LEMO provides DeltaTron supply from microphone LEMO supply)			



ZG 0350




UA 1405



WB 0850



ZG 0328



WB 1421



WB 1452

# HYDROPHONES


The Brüel & Kjær range of hydrophones is a range of individually calibrated, waterborne-sound transducers that have a flat frequency response and are omnidirectional over a wide frequency range. Their construction is such that they are absolutely waterproof and have good corrosion resistance. There are four types.

**Type 8103** is suitable for laboratory and industrial use and particularly for the acoustic study of marine animals or for cavitation measurements.

**Type 8104** is ideal for calibration purposes.

**Type 8105** is a robust, spherical hydrophone that can be used at an ocean depth of 1000 m. It has excellent directional characteristics, being omnidirectional over 270° in the axial plane and 360° in the radial plane.

**Type 8106** has a built-in amplifier that gives a signal suitable for transmission over long underwater cables. It can be used down to an ocean depth of 1000 m.

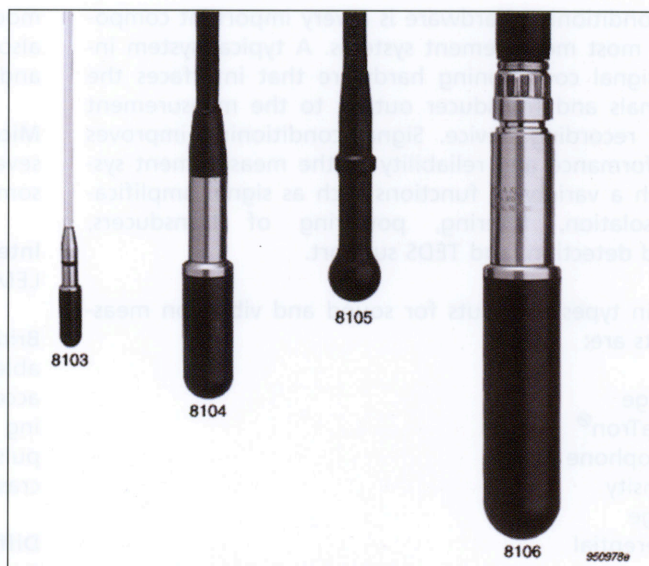

Type	8103	8104	8105	8106
<b>Voltage Sensitivity*</b> : (with cable) at 20 °C	30 $\mu\text{V}/\text{Pa} \pm 8 \mu\text{V}$ (-211 dB re 1 V/ $\mu\text{Pa} \pm 2$ dB)	56 $\mu\text{V}/\text{Pa} \pm 15 \mu\text{V}$ (-205 dB re 1 V/ $\mu\text{Pa} \pm 2$ dB)	56 $\mu\text{V}/\text{Pa} \pm 15 \mu\text{V}$ (-205 dB re 1 V/ $\mu\text{Pa} \pm 2$ dB)	2000 $\mu\text{V}/\text{Pa} \pm 500 \mu\text{V}$ (-174 dB re 1 V/ $\mu\text{Pa} \pm 2.5$ dB)
<b>Charge Sensitivity*</b> :	0.12 pC/Pa	0.44 pC/Pa	0.42 pC/Pa	–
<b>Capacitance*</b> : (with integral cable)	3850 pF	7800 pF	7500 pF	–
<b>Frequency Range*</b> (re 250 Hz):	(+1.0 dB) 0.1 Hz to 100 kHz (-6.0 dB) (+2.5 dB) 0.1 Hz to 180 kHz (-12.5 dB)	( $\pm 4.0$ dB) 0.1 Hz to 80 kHz (+4.0 dB) 0.1 Hz to 120 kHz (-12.0 dB)	(+1.0 dB) 0.1 Hz to 100 kHz (-6.5 dB) (+3.5 dB) 0.1 Hz to 160 kHz (-10.0 dB)	(+0.5 dB) 10 Hz to 10 kHz (-3.0 dB) (+0.5 dB) 7 Hz to 30 kHz (-8.0 dB)
<b>Operating Temperature Range</b> <b>Short-term:</b> <b>Continuous:</b>	-40°C to +120°C -40°C to +80°C	-40°C to +120°C -40°C to +80°C	-40°C to +120°C -40°C to +80°C	-10°C to +60°C
<b>Max. Operating Static Pressure:</b>	252 dB = $4 \times 10^6$ Pa = 40 atm. = 400 m ocean depth	252 dB = $4 \times 10^6$ Pa = 40 atm. = 400 m ocean depth	260 dB = $9.8 \times 10^6$ Pa = 100 atm. = 1000 m ocean depth	260 dB = $9.8 \times 10^6$ Pa = 100 atm. = 1000 m ocean depth
<b>Dimensions: Length:</b> <b>Body diameter:</b>	50 mm (1.97") 9.5 mm (0.37")	120 mm (4.73") 21 mm (0.83")	93 mm (3.66") 22 mm (0.87")	182 mm (7.17") 32 mm (1.26")
<b>Weight:</b> (including integral cable)	170 g (0.37 lb)	1.6 kg (3.5 lb)	1.6 kg (3.5 lb)	382 g (0.84 lb)
<b>Integral Cable</b>	6 m waterproof low-noise double-shielded teflon cable with standard miniature coaxial plug	10 m waterblocked low-noise shielded cable to MIL-C-915 with BNC plug	10 m waterblocked low-noise shielded cable to MIL-C-915 with BNC plug	None

\* Nominal value, each hydrophone is supplied with its own calibration data

**Note:** All values are typical at 25°C (77°F), unless measurement uncertainty is specified. All uncertainty values are specified at 2 $\sigma$  (i.e., expanded uncertainty using a coverage factor of 2)



# CONDITIONING AMPLIFIERS

Signal conditioning hardware is a very important component of most measurement systems. A typical system includes signal conditioning hardware that interfaces the raw signals and transducer output to the measurement or data recording device. Signal conditioning improves the performance and reliability of the measurement system with a variety of functions such as signal amplification, isolation, filtering, powering of transducers, overload detection, and TEDS support.

The main types of inputs for sound and vibration measurements are:

- Charge
- DeltaTron®
- Microphone
- Intensity
- Bridge
- Differential

**Charge Input:** For piezoelectric transducers such as charge accelerometers, force transducers, impact hammers, hydrophones etc.

**DeltaTron Input:** For piezoelectric accelerometers and preamplifiers with built-in electronics. DeltaTron identifies products that operate with a constant current power supply and give output signals in the form of a voltage

modulation on the power line supply. The technology is also known by other manufacturers as ISOTRON®, ICP®\* and Piezotron®.

**Microphone Input:** For microphone preamplifiers with seven pin sockets, usually a 7-pin LEMO socket although some units still have the B&K 7-pin socket.

**Intensity Input:** For intensity probes, either via two 7-pin LEMO sockets, or two 7-pin B&K sockets.

**Bridge Input:** Used for piezoresistive accelerometers, variable capacitance accelerometers and strain gauges. These accelerometers have the advantage of DC response making them suitable for measurement of long duration pulses found in transportation vibration, automotive crash studies and blast testing.

**Differential Input:** Differential accelerometers using a two wire cable surrounded by a screen. These accelerometers are usually used for heavy industrial application.


Microphone and DeltaTron transducers can be conditioned directly from the PULSE™ Multi-analyzer System, whereas charge and bridge transducers require an adaptor.

\* ICP is a registered trademark of PCB Piezotronics

In the following comparison tables, the following symbols are used:

✓	Standard feature
–	None
M	Manual control
C	Computer control
A	A weighting
Lin	Linear

# Microphone Conditioning Amplifiers

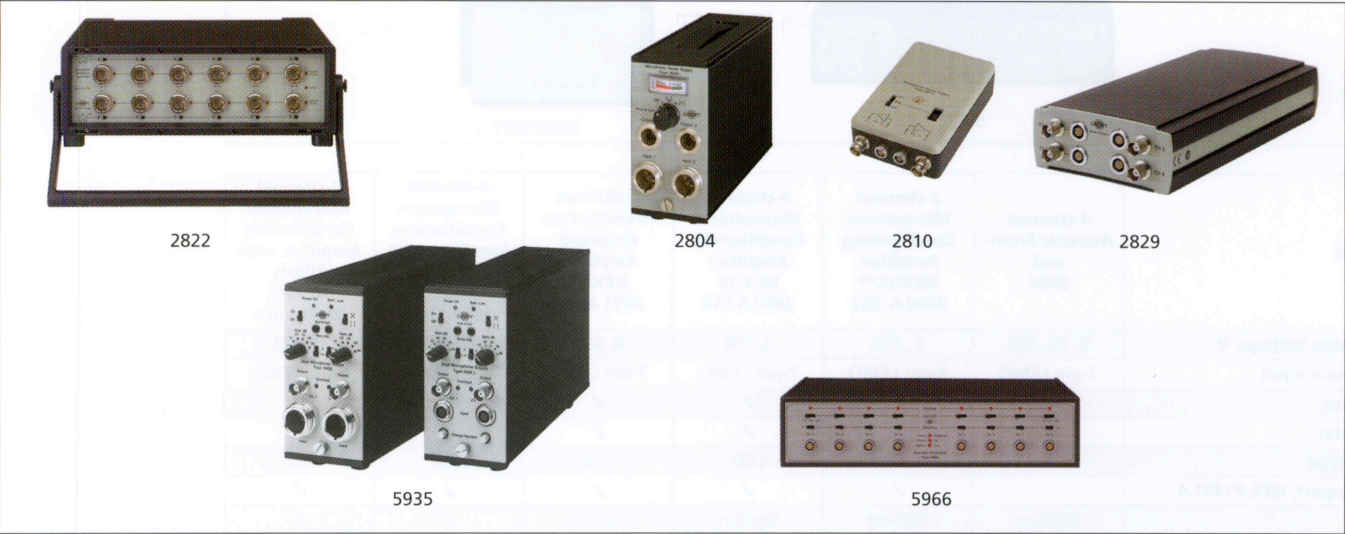


Acoustics	Microphone Multiplexer 2822	2-channel Microphone Power Supply 2804	2-channel Microphone Power Supply 2810	4-channel Microphone Power Supply 2829	Dual Microphone Supply with B&K Socket 5935	Dual Microphone Supply with LEMO Socket 5935L	8-channel Acoustic Front-end 5966
Polarization Voltage, V	0, 28, 200	0, 28, 201	28	0, 200	0, 28, 200	0, 28, 200	0, 28, 200
Microphone Input	7-pin B&K	7-pin B&K	5-pin LEMO	7-pin LEMO	7-pin B&K	7-pin LEMO	7-pin LEMO
AC Output	✓	✓	✓	✓	✓	✓	✓
Peak Meter	–	–	–	–	–	–	–
Display Type	–	–	–	–	–	–	–
TEDS Support, IEEE P1451.4	–	–	–	✓	–	–	–
Filters	–	–	–	Option	A, Lin	A, Lin	A, Lin
A, B, C, D Filters	–	–	–	–	–	–	–
Type of Control	M&C	M	M	–	M	M	M
19-inch Rack Mountable	✓	✓	✓	✓	✓	✓	✓
Channels Min./Max./19-inch	12	2	2	4	2	2	8
AC Input Power	✓	–	✓	–	–	–	✓
DC Input Power	–	✓	✓	✓	✓	✓	✓
Battery/Charge Adaptor	–	–	–	✓	–	–	–
Battery	–	✓	✓	–	✓	✓	✓
Gain	–	–	0 to 40 dB	–	0 to 55 dB	0 to 55 dB	0 to 40 dB






5968



2690/2691


Acoustics	4-channel Acoustic Front- end 5968	2-channel Microphone Conditioning Amplifier NEXUS™ 2690 A 0S2	4-channel Microphone Conditioning Amplifier NEXUS 2690 A 0S4	2-channel Intensity Con- ditioning Amplifier NEXUS 2691 A 0S4	2-channel Microphone Conditioning Amplifier with Filters NEXUS 2690 A 0F2	4-channel Microphone Conditioning Amplifier with Filters NEXUS 2690 A 0F4
Polarization Voltage, V	0, 28, 200	0, 200	0, 200	0, 200	0, 200	0, 200
Microphone Input	7-pin LEMO	7-pin LEMO	7-pin LEMO	7-pin LEMO	7-pin LEMO	7-pin LEMO
AC Output	✓	✓	✓	✓	✓	✓
Peak Meter	–	✓	✓	✓	✓	✓
Display Type	–	LCD	LCD	LCD	LCD	LCD
TEDS Support, IEEE P1451.4	–	✓	✓	✓	✓	✓
Filters	Option	Option	Option	Option	✓	✓
A, B, C, D Filters	–	Option	Option	Option	✓	✓
Type of Control	M	M&C	M&C	M&C	M&C	M&C
19-inch Rack Mountable	✓	✓	✓	✓	✓	✓
Channels Min./Max./19-inch	4	2	4	2	2	4
AC Input Power	–	✓	✓	✓	✓	✓
DC Input Power	✓	✓	✓	✓	✓	✓
Battery/Charge Adaptor	–	✓	✓	✓	✓	✓
Battery	✓	Option	Option	Option	Option	Option
Gain	0 to 40 dB	–20 to 80 dB	–20 to 80 dB	–20 to 80 dB	–20 to 80 dB	–20 to 80 dB

DeltaTron Conditioning Amplifiers

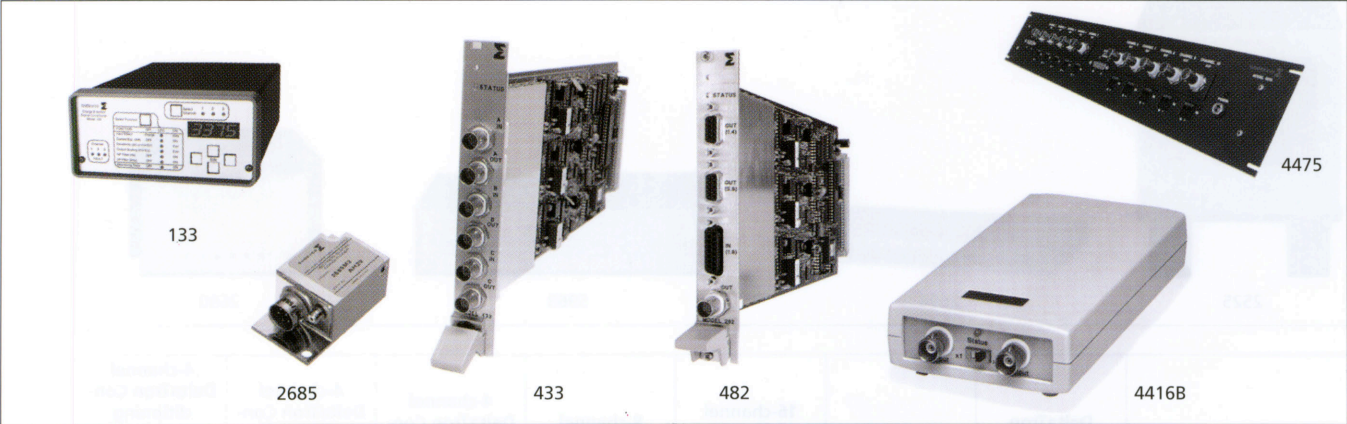


	PE/ISOTRON Signal Conditioner 133	ISOTRON Air- borne Charge Amplifier 2685MX	3-channel PE/ ISOTRON Con- ditioner OASIS 433	8-channel SMART Trans- ducer Condi- tioner OASIS 482	Battery-pow- ered ISOTRON Conditioner 4416B	10-channel ISOTRON Power Supply 4475	DeltaTron Power Supply WB 1372
Acoustics							
Charge Input (Piezoelectric)	BNC	–	BNC	–	–	–	–
DeltaTron/ISOTRON input	BNC	BNC	BNC	BNC	BNC	BNC	BNC
AC Output	✓	✓	✓	✓	✓	✓	✓
RMS	✓	–	–	–	–	–	–
Peak	–	–	–	–	–	–	–
Display Type	LED	–	–	–	–	–	Meter
TEDS support IEEE P1451.4	–	–	–	✓	–	–	–
Filter	✓	Option	✓	✓	–	–	–
A, B, C, D Filters	–	–	–	–	–	–	–
Type of Control	M&C	M	C	C	M	M	M
19-inch Rack Mountable	✓	–	✓	✓	–	✓	–
Channels Min./Max./19-inch	3/9	1	3/48	8/128	1	10	1
AC Input Power	✓	✓	✓	✓	–	–	–
DC Input Power	Option	–	–	–	✓	✓	✓
BatteryAdaptor/Charge Adaptor	Option	–	–	–	Option	Option	–
Battery	–	–	–	–	–	–	✓





2525



2694




5963



2690

Acoustics	DeltaTron Power Supply Adaptor ZG 0328	Measuring Amplifier 2525	16-channel DeltaTron Conditioning Amplifier 2694	8-channel DeltaTron Supply 5963	4-channel DeltaTron Conditioning Amplifier with Filters NEXUS 2693 A 054	4-channel DeltaTron Conditioning Amplifier with Filters NEXUS 2693 A 0F4	4-channel DeltaTron Conditioning Amplifier with Single and Double Integration NEXUS 2693 A 014
Charge Input (Piezoelectric)	–	TNC	–	–	–	–	–
DeltaTron/ISOTRON Input	7-pin LEMO	BNC	BNC	BNC	BNC	BNC	BNC
AC Output	✓	✓	✓	✓	✓	✓	✓
RMS	–	✓	–	–	–	–	–
Peak	–	✓	–	–	✓	✓	✓
Display Type	–	LCD	–	–	LCD	LCD	LCD
TEDS support IEEE P1451.4	–	–	✓	–	✓	✓	✓
Filter	–	Option	Option	–	✓	✓	✓
A, B, C, D Filters	–	Option	Option	–	Option	✓	Option
Type of Control	M	M&C	M&C	M	M&C	M&C	M&C
19" Rack Mountable	–	Option	✓	Option	Option	Option	Option
Channels Min./Max./19-inch	1	1	16	8	4	4	4
AC Input Power	–	✓	✓	✓	✓	✓	✓
DC Input Power	–	–	✓	✓	✓	✓	✓
Battery Adaptor/Charge Adaptor	–	–	✓	–	✓	✓	✓
Battery	–	–	–	✓	Option	Option	Option

## Charge Conditioning Amplifiers

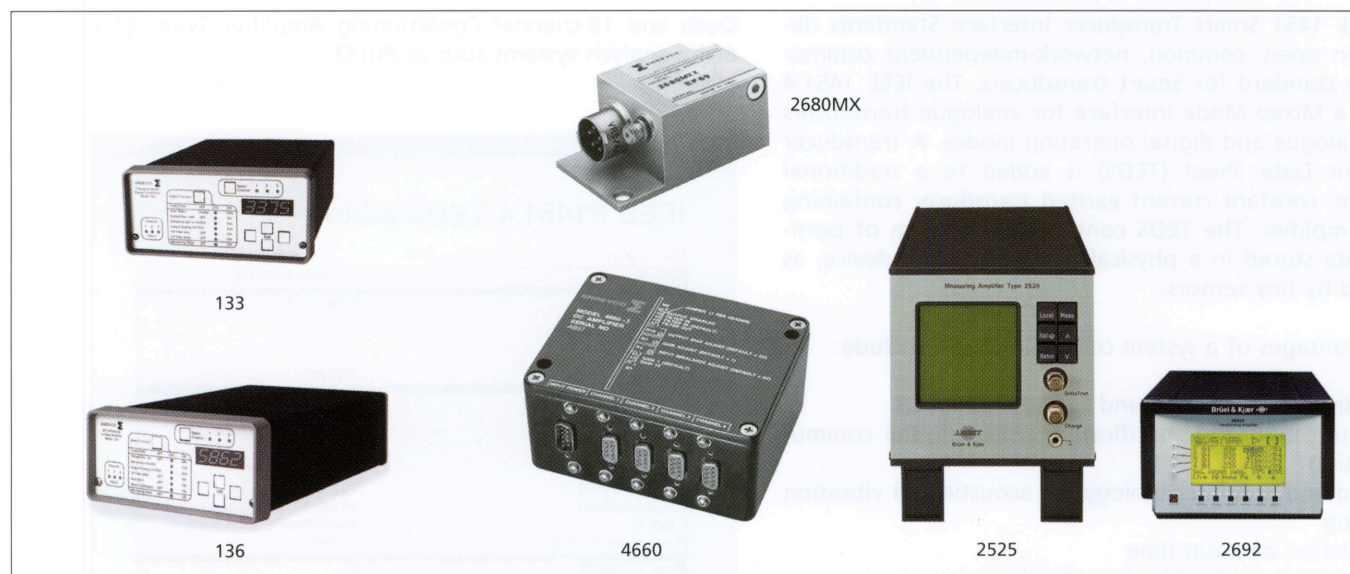

Acoustics	PE/ISOTRON Signal Condi- tioner 133	DC Amplifier 136	DC Amplifier 2680MX	4-channel Air- borne PR and VC Signal Conditioner 4660	Measuring Amplifier 2525	1-channel Charge Condi- tioning Ampli- fier NEXUS 2692 A 051	4-channel Charge Condi- tioning Ampli- fier NEXUS 2692 A 054
Charge Input (Piezoelectric)	✓	–	✓	–	✓	✓	✓
Bridge Input (Piezoresistive)	–	✓	–	✓	–	–	–
AC Output	✓	✓	✓	✓	✓	✓	✓
DC Output	–	✓	–	–	–	–	–
RMS	✓	✓	–	–	✓	–	–
Peak	–	–	–	–	✓	✓	✓
Display Type	LED	LED	–	–	LCD	LCD	LCD
TEDS support IEEE 1451.4	–	–	–	–	–	✓	✓
Filter	✓	✓	Option	–	✓	Option	Option
A, B, C, D Filters	–	–	–	–	–	✓	✓
Type of Control	M&C	M&C	M	M	M&C	M&C	M&C
19" Rack Mountable	✓	✓	–	–	✓	✓	✓
Channels Min./Max./19-inch	3/9	3	1	4	1	1	4
AC Input Power	✓	✓	–	–	✓	✓	✓
DC Input Power	Option	Option	✓	✓	–	✓	✓
BatteryAdaptor/Charge Adaptor	Option	Option	–	–	–	✓	✓
Battery	–	–	–	–	–	Option	Option



# TEDS and IEEE1451.4 Support


The IEEE 1451 Smart Transducer Interface Standards describe an open, common, network-independent communication standard for Smart transducers. The IEEE 1451.4 defines a Mixed Mode Interface for analogue transducers with analogue and digital operating modes. A Transducer Electronic Data Sheet (TEDS) is added to a traditional two-wire, constant current excited transducer containing a FET amplifier. The TEDS contains a minimum of pertinent data stored in a physically small memory device, as required by tiny sensors.

The advantages of a system containing TEDS include:

- Elimination of cabling and connection errors
- Identification and specification using digital communication
- "Plug and play" technology for acoustic and vibration testing
- Reduction of setup time
- Simplification of calibration databases

Access to the data in the TEDS template is available via a TEDS Editor Kit or by Control Software Packages for conditioning amplifiers that support IEEE 1451.4 (i.e., NEXUS,

Oasis and 16-channel Conditioning Amplifier Type 2694) or by analysis systems such as PULSE.

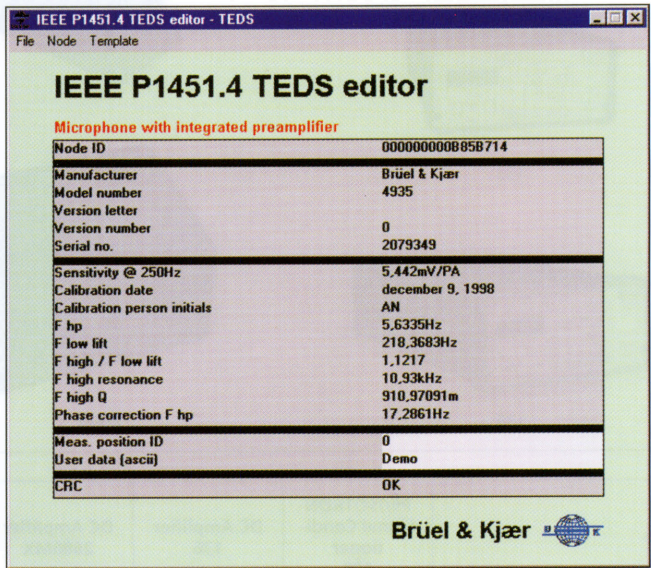

TEDS Editor Kits	WA 0876	WA 0877	WA 0887
Principle Use	Calibration	Development	Viewer
Reads All Fields in Template	Yes	Yes	Yes
Writes in Calibration/Transducer Specific Field	Yes	Yes	No
Writes in Manufacturer's Field	No	Yes	No
Writes in User Field	Yes	Yes	Yes



# CALIBRATION

The most important parameter for any measurement device is sensitivity. The sensitivity can be defined as the ratio of the output parameter to the input parameter. To determine the sensitivity is to calibrate the measurement device.


A calibration is performed:

- To ensure that your measurements are correct
- To prove that measurement methods and the equipment used are accurate, for example, to prove that a

measurement complies with the requirements of national legislation, standard bodies and customers

- To verify the stability of the measurement equipment, including equipment used to perform calibration
- To account for local measurement conditions, for example, variations in ambient pressure and temperature
- To ensure product quality
- To build confidence in measurement results

## Calibrators

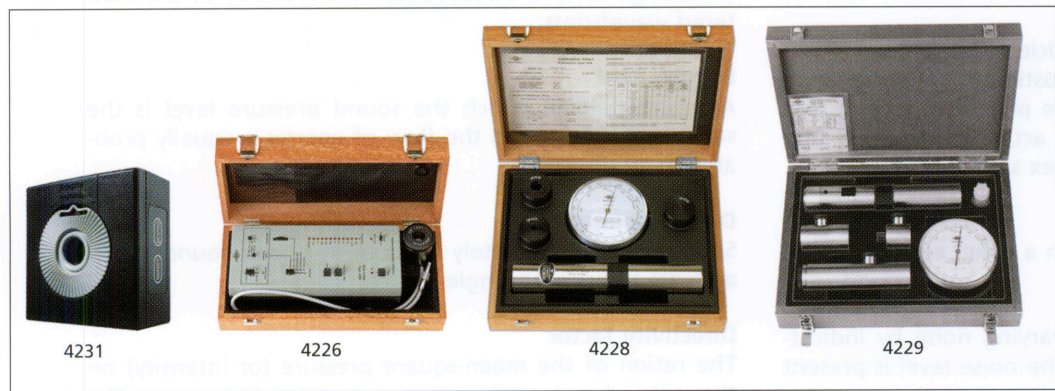

Type Number		4231	4226	4228	4229
Description		Sound Level Calibrator	Pistonphone	Multifunction Acoustic Calibrator	Hydrophone Calibrator
Standards		IEC 942 (1998) Class 1 ANSI S1.4–1984	IEC 942 (1998) Class 1 Ansi S1.4–1984	IEC 942 (1998) Class 1	–
Calibration Pressure	dB SPL	94 and 114	94, 104 and 114	124	From 151 to 166 dB re 1uPa, depending on hydrophone
Calibration Frequencies	Hz	1000	31.5 Hz to 16 kHz in octave steps. 12.5 kHz	251.2	251.2
Calibration Accuracy	dB	±0.2	±0.2 at 94 dB	±0.2	±0.7
Transducer		1-inch and 1/2-inch (1/4-inch and 1/8-inch with adaptor)	1/2-inch and 1/4-inch	1-inch, 1/2-inch, 1/4-inch and 1/8-inch	Fits Types 8100, 8101, 8103, 8104, 8105 and 8106



# GLOSSARY OF ACOUSTICAL TERMS

## **Absorption**

The conversion of sound energy into another form of energy, usually heat when passing through an acoustical medium.

## **Absorption coefficient**

Ratio of sound absorbing effectiveness at a specific frequency, of a unit area of acoustical absorbent to a unit area of perfectly absorptive material.

## **Acoustics**

The science of the production, control, transmission, reception and effects of sound and of the phenomenon of hearing.

## **Active sound field**

A sound field in which the particle velocity is in phase with the sound pressure. All acoustic energy is transmitted, none is stored. A plane wave propagating in a free field is an example of a purely active sound field and constitutes the real part of complex sound field.

## **Ambient noise**

All-pervasive noise associated with a given environment.

## **Amplitude distribution**

A method of representing time-varying noise by indicating the percentage of time that the noise level is present in a series of amplitude intervals.

## **Anechoic room**

A room whose boundaries effectively absorb all incident sound over the frequency range of interest, thereby creating essentially free field conditions.

## **Audibility threshold**

The sound pressure level, for a specified frequency at which persons with normal hearing begin to respond.

## **Background noise**

The ambient noise level above which signals must be presented or noise sources measured.

## **Complex intensity**

Complex intensity is the combined intensity and imaginary intensity.

## **Cumulative distribution**

A method of representing time-varying noise by indicating the percentage of time that the noise level is present above (or below) a series of amplitude levels.

## **Damping (1)**

The action of frictional or dissipative forces on a dynamic

system causing the system to lose energy and reduce the amplitude of movement.

## **Damping (2)**

Removal of echoes and reverberation by the use of sound absorbing materials. *Also:* Sound proofing

## **Decibel scale**

A linear numbering scale used to define a logarithmic amplitude scale, thereby compressing a wide range of amplitude values to a small set of numbers.

## **Diffraction**

The scattering of radiation at an object smaller than one wavelength and the subsequent interference of the scattered wavefronts.

## **Diffuse field**

A sound field in which the sound pressure level is the same everywhere and the flow of energy is equally probable in all directions.

## **Diffuse sound**

Sound that is completely random in phase; sound which appears to have no single source.

## **Directivity factor**

The ratio of the mean-square pressure (or intensity) on the axis of a transducer at a certain distance to the mean-square pressure (or intensity) which a spherical source radiating the same power would produce at that point.

## **Dynamic capability**

The dynamic capability of an intensity measurement system is determined by adding normally 5 dB (for a measuring error less than 2 dB) to the Residual Intensity Index.

## **Far field**

Distribution of acoustic energy at a very much greater distance from a source than the linear dimensions of the source itself; the region of acoustic radiation used to the source and in which the sound waves can be considered planar.

## **Free field**

An environment in which there are no reflective surfaces within the frequency region of interest.

## **Hearing loss**

An increase in the threshold of audibility due to disease, injury, age or exposure to intense noise.



**Hertz**

The unit of frequency measurement, representing cycles per second.

**Imaginary intensity**

Imaginary intensity is the non-propagating part of the sound field (sometimes called the reactive part).

**Impedance, specific acoustic**

The complex ratio of dynamic pressure to particle velocity at a point in an acoustic medium, measured in rayls ( $1 \text{ rayl} = 1 \text{ N} \cdot \text{s/m}^3$ ).

**Infrasound**

Sound at frequencies below the audible range, i.e., below about 16 Hz.

**Intensity**

Intensity is the real part of the complex intensity and is the propagating part of the sound field (sometimes called the active part).

**Isolation**

Resistance to the transmission of sound by materials and structures.

**Loudness**

Subjective impression of the intensity of a sound.

**Masking**

The process by which threshold of audibility of one sound is raised by the presence of another (masking) sound.

**Near field**

That part of a sound field, usually within about two wavelengths from a noise source, where there is no simple relationship between sound level and distance.

**Newton**

The force required to accelerate a kg mass at  $1 \text{ m/s}^2$ . Approximately equal to the gravitational force on a 100 g mass.

**Noise emission level**

The dB(A) level measured at a specified distance and direction from a noise source, in an open environment, above a specified type of surface. Generally follows the recommendation of a national or industry standard.

**Noise reduction coefficient, NRC**

The arithmetic average of the sound absorption coefficients of a material at 250, 500, 1000 and 2000 Hz.

**Noy**

A linear unit of noisiness or annoyance.

**Particle velocity**

The velocity of air molecules about their rest position due to a sound wave.

**Pascal, Pa**

A unit of pressure corresponding to a force of 1 newton acting uniformly upon an area of 1 square metre. Hence  $1 \text{ Pa} = 1 \text{ N/m}^2$ .

**Phase mismatch**

The relative phase mismatch between the two channels in an Intensity Measuring System.

**Phon**

The loudness level of a sound. It is numerically equal to the sound pressure level of a 1 kHz free progressive wave, which is judged by reliable listeners to be as loud as the unknown sound.

**Pink noise**

Broadband noise whose energy content is inversely proportional to frequency ( $-3 \text{ dB}$  per octave or  $-10 \text{ dB}$  per decade).

**Power spectrum level**

The level of the power in a band one hertz wide referred to a given reference power.

**Pressure Residual Intensity Index,  $L_{K,0}$** 

The pressure residual intensity index for a given measurement system is defined as the difference between the measured pressure level and the indicated sound intensity level when exactly the same signal is fed into the two channels of an intensity analysing system.

**Random noise**

Noise, whose instantaneous amplitude is not specified at any instant of time. Instantaneous amplitude can only be defined statistically by an amplitude distribution function.

**Residual Intensity Index**

Residual Intensity Index in a given direction at a point is defined as the difference between the sound level and the sound pressure level measured in the given direction at that point. In practice  $L_K$  is normally negative.

**Residual Intensity,  $L_{I,R}$** 

The sound intensity level measured when the same signal



is fed to both channels of a sound intensity measuring system, or it is exposed to a pure reactive field.

#### Reverberation

The persistence of sound in an enclosure after a sound source has been stopped. Reverberation time is the time, in seconds required for sound pressure at a specific frequency to decay 60 dB after a sound source is stopped.

#### Root mean square (RMS)

The square root of the arithmetic average of a set of squared instantaneous values.

#### Sabine

A measure of sound absorption of a surface. One metric sabine is equivalent to 1 square metre of perfectly absorptive surface

#### Semianechoic field

A free field above a reflective plane.

#### Sone

A linear unit of loudness. The ration of loudness of a sound to that of a 1 kHz tone 40 dB above the threshold of hearing.

#### Sound

Energy that is transmitted by pressure waves in air or other materials and is the objective cause of the sensation of hearing. Commonly called noise if it is unwanted.

#### Sound intensity

The rate of sound energy transmission per unit area in a specified direction.

#### Sound level

The level of sound measured with a sound level meter and one of its weighting networks. When A-weighting is used, the sound level is given in dB(A).

#### Sound level meter

An electronic instrument for measuring the RMS level of sound in accordance with an accepted national or international standard.

#### Sound power

The total sound energy radiated by a source per unit time.

#### Sound power level

The fundamental measure of sound power. Defined as:

$$L_W = 10 \log \frac{P}{P_0} \text{ dB}$$

Where  $P$  is the RMS value of sound power in watts, and  $P_0$  is 1 pW.

#### Sound pressure

A dynamic variation in atmospheric pressure. The pressure at a point in space minus the static pressure at that point.

#### Sound pressure level

The fundamental measure of sound pressure. Defined as:

$$L_p = 20 \log \frac{p}{p_0} \text{ dB}$$

Where  $p$  is the RMS value (unless otherwise stated) of sound pressure in pascals, and  $p_0$  is 20  $\mu$ Pa for measurements in air.

#### Sound transmission class, STC

A single-number rating for describing sound transmission loss of a wall or partition.

#### Sound transmission loss

Ratio of the sound energy emitted by an acoustical material or structure to the energy incident upon the opposite side.

#### Standing wave

A periodic wave having a fixed distribution in space which is the result of interference of progressive waves of the same frequency and kind. Characterised by the existence of maxima and minima amplitudes that are fixed in space.

#### Ultrasound

Sound at frequencies above the audible range, i.e., above about 20 kHz.

#### Wavelength

The distance measured perpendicular to the wavefront in the direction of propagation between two successive points in the wave, which are separated by one period. Equals the ratio of the speed of sound in the medium to the fundamental frequency.

#### Weighting network

An electronic filter in a sound level meter which approximates under defined conditions the frequency response of the human ear. The A-weighting network is most commonly used.

#### White noise

Broadband noise having constant energy per unit of frequency.



# INDEX

## A

Absorption .....	30
Absorption coefficient .....	30
Acoustics .....	30
Active sound field .....	30
Adaptors .....	17
Adaptors for calibration .....	20
Airbag microphone .....	5
Ambient noise .....	30
Amplitude distribution .....	30
Anechoic room .....	30
Array microphone .....	4
Audibility threshold .....	30

## B

Background noise .....	30
Beamforming .....	4
Bridge input .....	22

## C

Cables .....	15
Calibration .....	29
Calibration microphone .....	4
Calibrators .....	14, 29
Charge input .....	22
CIC adaptor .....	20
Comparison of sound intensity calibrators .....	14
Complex intensity .....	30
Conditioning amplifiers .....	7, 22, 27
Corrector .....	19
Cumulative distribution .....	30

## D

Damping .....	30
DC amplifier .....	27
Decibel scale .....	30
Dehumidifier .....	18
DeltaTron conditioning amplifiers .....	25
DeltaTron input .....	22
DeltaTron power supply .....	25
DeltaTron power supply adaptor .....	26
Differential input .....	22
Diffraction .....	30
Diffuse field .....	7, 30
Diffuse sound .....	30
Diffuse-field microphones .....	3
Directivity factor .....	30
Dual microphone supply .....	23
Dynamic capability .....	30
Dynamic range .....	1

## E

Electrostatic actuators .....	20
Externally polarized microphones .....	1

## F

Far field .....	30
Free field .....	1, 7, 30
Free-field microphones .....	2
Frequency response .....	1

## G

Glossary of acoustical terms .....	30
------------------------------------	----

## H

Hearing loss .....	30
Heavy duty tripod .....	19
Hertz .....	31
High sound pressure microphone .....	4
High static pressure microphone .....	4
Hydrophones .....	21, 22

## I

ICP® .....	22
IEC 61043 .....	12
IEEE1451.4 .....	7, 28
Imaginary intensity .....	31
Impedance .....	31
Infrasound .....	31
Intensity .....	31
Intensity input .....	22
Isolation .....	31
ISOTRON .....	22

## L

Lightweight tripod .....	19
Loudness .....	31
Low-frequency microphone .....	4
Low-noise microphone .....	4

## M

Masking .....	31
Measurement microphone .....	1
Measuring amplifier .....	26, 27
Microphone accessories .....	17
Microphone conditioning amplifiers ..	23
Microphone holder for tripod .....	19
Microphone input .....	22
Microphone multiplexer .....	23
Microphone preamplifiers .....	9
Microphone stand .....	19
Miscellaneous .....	20

## N

Near field .....	31
Newton .....	31
NEXUS .....	7, 24, 27
Noise emission level .....	31
Noise reduction coefficient .....	31
Non-stationary STSF .....	4
Nose cone .....	18
Noy .....	31
NRC .....	31

## O

OASIS .....	7, 25
Outdoor microphone .....	4
Outdoor microphone kit .....	18
Outdoor protection .....	18

## P

Pa .....	31
Particle velocity .....	31
Pascal .....	31
Phase mismatch .....	31
Phon .....	31
Piezotron® .....	22
Pink noise .....	31
Polarization .....	1
Portable PULSE .....	7
Power spectrum level .....	31
Power supply .....	7
Preamplifier holders .....	19
Preamplifiers .....	5, 18
Prepolarized microphones .....	1
Pressure residual intensity index .....	31
Pressure-field .....	1, 7
Pressure-field microphones .....	4
Probe microphone .....	4

## R

Rain cover .....	18
Random incidence corrector .....	19
Random incidence microphone .....	3
Random noise .....	31
Residual intensity .....	31
Residual intensity index .....	31
Reverberation .....	32
RMS .....	32
Root mean square .....	32
Rotating boom .....	19

## S

Sabine .....	32
Selecting microphones .....	1
Semianechoic field .....	32



Signal conditioning card .....	7	Sound transmission loss .....	32	Turbulence screen .....	19
Sone .....	32	Special microphones .....	4	<b>U</b>	
Sound .....	32	Standards .....	1	Ultrasound .....	32
Sound field .....	1	Standing wave .....	32	UTID .....	7, 8
Sound intensity .....	12, 32	STC .....	32		
Sound intensity calibrators .....	14	STSF .....	4		
Sound intensity microphone pairs .....	13				
Sound level .....	32	<b>T</b>		<b>W</b>	
Sound level meter .....	18, 32	TEDS .....	7, 28	Wavelength .....	32
Sound power .....	32	TEDS editor .....	9	Weighting network .....	32
Sound power level .....	32	TEDS editor kits .....	28	White noise .....	32
Sound pressure .....	32	TEDS microphones .....	7	Windscreen .....	17
Sound pressure level .....	32	Transducer Electronic Data Sheets .....	7		
Sound transmission class .....	32				

## TYPE NUMBER INDEX

133 .....	25, 27	2822 .....	23	4231 .....	29
136 .....	27	2829 .....	7, 23	4297 .....	14
2231 .....	18	3451 .....	14	4416B .....	25
2236 .....	18	3595 .....	12	4475 .....	25
2237 .....	18	3599 .....	12	4660 .....	27
2238 .....	18	3923 .....	19	4935 .....	4, 16
2239 .....	18	4130 .....	2, 19	4938 .....	2, 4, 5, 6, 7
2260 .....	12, 18	4133 .....	2	4939 .....	2, 7
2510 .....	6	4134 .....	2	4941 .....	6, 8
2525 .....	26, 27	4135 .....	2	4942 .....	3, 8
2619 .....	10	4136 .....	2	4943 .....	2, 3, 8
2627 .....	10	4138 .....	4, 7	4944 .....	4
2633 .....	10	4144 .....	4	4944A .....	16
2639 .....	10	4145 .....	2	4947 .....	4
2642 .....	2, 10	4147 .....	2	5693 .....	26
2645 .....	10	4155 .....	2	5935 .....	23
2660 .....	4, 10	4160 .....	4	5966 .....	23
2669 .....	2, 7, 9, 10, 18, 19	4165 .....	2	5968 .....	24
2670 .....	2, 5, 9, 10	4166 .....	2	8103 .....	21
2671 .....	10, 18, 19	4176 .....	2	8104 .....	21
2673 .....	10, 18	4178 .....	13	8105 .....	21
2683 .....	12	4179 .....	4	8106 .....	21
2690 A 0F2 .....	24	4180 .....	4	8507 .....	6
2690 A 0F4 .....	24	4182 .....	4, 6	8510 .....	6
2690 A 0S2 .....	24	4184 .....	4	AC 0219 .....	15
2690 A 0S4 .....	24	4188 .....	2, 7	AC 0289 .....	15
2691 A 0S4 .....	24	4189 .....	2, 7	AO 0027 .....	15
2692 A 0S1 .....	27	4190 .....	2, 7	AO 0028 .....	15
2692 A 0S4 .....	27	4191 .....	2, 7	AO 0029 .....	15
2693 A 0F4 .....	26	4192 .....	2, 4, 8	AO 0087 .....	15
2693 A 0I4 .....	26	4193 .....	2, 4, 5, 8	AO 0142 .....	15
2693 A 0S4 .....	26	4197 .....	12, 13	AO 0414 .....	15
2694 .....	7, 26	4198 .....	4	AO 0415 .....	15
2695 .....	10, 16	4226 .....	29	AO 0416 .....	15
2804 .....	23	4228 .....	29	AO 0419 .....	15
2810 .....	23	4229 .....	29	AO 0426 .....	15

AO 0427	15	UA 0033	20	UA 1254	19
AO 0428	15	UA 0035	17	UA 1260	17
AO 0429	15	UA 0036	17	UA 1284	19
AO 0430	15	UA 0122	17	UA 1317	19
AO 0488	15	UA 0123	17	UA 1404	18
AO 0531	16	UA 0160	4, 17	UA 1405	20
AO 0564	16	UA 0196	17	UA 1577	19
AO 0587	16	UA 0207	17	UA 1588	19
AR 0014	15	UA 0237	17	UC 0195	13
DB 0264	20	UA 0253	17	UC 5269	13
DB 0375	17	UA 0254	17	UC 5270	13
DB 0900	20	UA 0308	18	UC 5349	13
DB 3611	18	UA 0355	18	WA 0371	17
DP 0774	20	UA 0385	18	WA 0876	9, 28
DP 0775	20	UA 0387	18	WA 0877	9, 28
DP 0776	20	UA 0393	18	WA 0887	28
DZ 9566	19	UA 0436	19	WB 0850	20
EE 0158	6	UA 0459	17	WB 1372	25
EE 0161	6	UA 0469	17	WB 1421	20
EE 0162	6	UA 0570	17	WB 1452	20
EE 0205	6	UA 0587	19	WL 1320	16
EE 0206	6	UA 0786	17	WQ 1099	17
EL 4004	15	UA 0801	19	WQ 1133	17
EL 4005	15	UA 0803	19	ZG 0328	20, 26
EL 4006	15	UA 0989	19	ZG 0350	20
EL 4025	15	UA 1070	17	ZH 0632	12
EU 4000	17	UA 1071	17		
UA 0023	20	UA 1251	19		



# SALES AND SERVICE WORLDWIDE

## ARGENTINA

Coasin S.A.  
Virrey del Pino 4071  
1430 Buenos Aires  
Tel: +54 11 45523185/3485  
Fax: +54 11 45553340/3321  
E-mail: coasin@coasin.com.ar

## AUSTRALIA

Brüel & Kjær Australia  
Suite 2, 6-10 Talavera Road  
North Ryde NSW 2113  
Postal Address  
PO Box 349  
North Ryde NSW 2113  
Tel: +61 02 9889 8888  
Fax: +61 02 9889 8866

## AUSTRIA

Brüel & Kjær, GmbH  
Zweigniederlassung Österreich  
Lemböckgasse 49/Haus  
2/Stg. E/6  
A-1230 Wien  
Tel: +43 1 8657400  
Fax: +43 1 8657403  
E-mail: bk.austria@bkscv.com

## BAHRAIN

Aeradio Technical Services  
P.O. Box 26803  
Tel: +973 727790  
Fax: +973 727811  
E-mail: atsbah@aera-  
dio.com.bh

## BELGIUM

ENMO Belgium  
Slachthuisstraat 68  
2300 Turnhout  
Tel: +32 14 401855  
Fax: +32 14 401856  
E-mail: info@enmo.be

## BRAZIL

Spectris do Brazil Ltda.  
Rua José de Carvalho No. 55  
Chácara Santo Antonio  
CEP 04714-020 São Paulo-SP  
Tel: +55 11 51828166  
Fax: +55 11 51817400  
E-mail: bkbr@uol.com.br

## BULGARIA

SPECTRI Bulgaria  
q. "Mladost", bl. 100,  
entr. IV, app.57  
1797 Sofia  
Tel: +359 2 719 586  
Fax: +359 2 719 586  
E-mail: spectri@sbline.net

## CANADA

Brüel & Kjær - Pointe-Claire  
90 Leacock Road  
Pointe Claire  
Quebec H9R 1H1  
Tel: +1 514 6958225  
Fax: +1 514 6954808  
E-mail: bkinfo@bkscv.com

## CHILE

TECSIS Ltda.  
Avenida Holanda 1248  
Casilla 50 - Correo 9  
Santiago  
Tel: +56 2 2051313  
Fax: +56 2 2250759

## CHINA, P.R.

Spectris China Limited  
Rm 609-610 Canway Build-  
ing  
No. 66 Nanlilishilu  
Beijing 100045  
Tel: +86 10 68029906/  
68029908  
Fax: +86 10 68029962

## COSTA RICA

Capris S.A.  
Apartado 7-2400  
Carretera La Uruca  
San José  
Tel: +506 2329111  
Fax: +506 2329353

## CROATIA

Mr. Stanko Peric  
Zeljeznicka 84  
Sesvetski Kraljevec  
HR-10361 Zagreb  
Tel: +385 1 20 46 766  
Fax: +385 1 20 46 766  
E-mail: stanko.peric@zg.hi-  
net.hr

## CYPRUS

Hellenic Technical  
Enterprises Ltd.  
P.O. Box 446  
Larnaca  
Tel: +357 4 533300  
Fax: +357 4 530932  
E-mail: heltech2@log-  
os.cy.net

## CZECH REPUBLIC

Spectris Praha spol. s.r.o.  
Pocernieka 96  
108 00 Praha 10  
Tel: +420 2 67021100  
Fax: +420 2 67021120  
E-mail: s&v@spectris.cz

## DENMARK

Brüel & Kjær Sound & Vibra-  
tion  
Denmark Sales A/S  
DK Sales  
Skodsborgvej 307  
2850 Nærum  
Tel: +45 77 41 20 00  
Fax: +45 77 41 20 30  
E-mail: nordic@bk.dk

## ECUADOR

GRUBEL Comercio y Repre-  
sentaciones  
Calle Bosmediano 1218 y  
Av. 6 de Diciembre  
Quito  
Tel: +5932 2 255 242  
Fax: +5932 2 255 243  
E-mail: mgrubel@porta.net

## EGYPT

Delta Company for Electron-  
ics  
31 El Shahed Abdel Moneim  
Hafez St.  
Almaza - Heliopolis, Cairo  
Tel: +20 2 4189605, 4199053  
Fax: +20 2 4180964  
E-mail: dce@gega.net

## ESTONIA

Scanditron A/S  
Laki 12  
EE-0006 Tallinn  
Tel: +372 6 562733  
Fax: +372 6 562731  
E-mail: scandi@eol.ee

## FINLAND

Intotell Oy  
Lämmittäjäkatu 4  
PL 95  
00811 Helsinki  
Tel: +358 9 755950  
Fax: +358 9 7553581  
E-mail: into@into.fi

## FRANCE

Brüel & Kjær France S.A.  
46, Rue du Champoreux B.P.  
33  
F-91541 Mennecy CEDEX  
Tel: +33 1 69907100  
Fax: +33 1 69900255  
E-mail: dscc@bk.spectris.fr

## GERMANY

Brüel & Kjær GmbH  
Universitätsallee 11 - 13  
D-28359 Bremen  
Tel: +49 421 17 87 0  
Fax: +49 421 17 87 100  
E-mail: infobk.de@bkscv.com

## GREECE

American Technical Enter-  
prises  
Agio Konstantinou 39, 1st  
Floor  
Athens 10437  
Tel: +30 1 5240740  
Fax: +30 1 5249995  
E-mail: ate2000@otenet.gr

## HONG KONG

Spectris China Ltd.  
Unit 706, 7/F Miramar Tower  
132  
Nathan Road  
Tsim Sha Tsui, Kowloon  
Tel: +852 25487486  
Fax: +852 28581168  
E-mail: sales@spectris.com.hk

## HUNGARY

Spectris Components Kft.  
Brüel & Kjær Division  
Telepy Utca 2/F  
1096 Budapest  
Tel: +36 1 2158305  
Fax: +36 1 2158202  
E-mail: bruel@elender.hu

## ICELAND

STG International ehf  
Alfabakka 12  
IS-109 Reykjavik  
Tel: +354 587 2731  
Fax: +354 587 1825  
E-mail: stg@centrum.is

## INDIA

Jost's Engineering Co. Ltd.  
Plot No. 3, Survey No. 126  
Paud Road  
Pune 410038  
Tel: +91 20 5434350  
Fax: +91 20 5434393  
E-mail: sales@pune.josts.com

## INDONESIA

PT Cosmotec Saran  
Elektronika Indonesia  
Jalan Jembatan Dua  
Komplek Ruko Harmoni  
Mas, Blok A-15  
Jakarta Utara 14450  
Tel: +62 21 6670011  
Fax: +62 21 6670020  
E-mail: cosmotec@indo-  
sat.net.id

## INDONESIA

PT Tamara Overseas Corp.  
Jl. Pinangia Timur No. 49  
P.O. Box 1446  
Jakarta 10014  
Tel: +62 21 6251690  
Fax: +62 21 6251689  
E-mail: tocgen@cbn.net.id

## IRELAND

Edpac International Ltd.  
The Techpro Building  
Clonsaugh Ind. Est.  
Coolock  
Dublin 17  
Tel: +353 1 803 7600  
Fax: +353 1 803 7601  
Email: gary.duffy@bkscv.co.uk

## IRAN

Perse-Sanco Ltd.  
No. 9 Maryam Alley  
South Shams Tabrizi St.  
Mirdamad Avenue  
P.O. Box 19485-318  
Tehran  
Tel: +98 21 2222575  
Fax: +98 21 2229588  
E-mail: PerseSanco@ka-  
noon.net

## IRAQ

I. Nasralla & Co.  
P.O. Box 2322  
Baghdad  
Tel: +964 1 7193060/7193069  
Fax: +964 1 7196711

## ISRAEL

Agentek 1987 Ltd.  
Atidim Scientific Park, Build-  
ing No. 5  
P.O.B. 58008  
Tel Aviv 61580  
Tel: +972 3 6493111  
Fax: +972 3 6481257  
E-mail: Sales2@agentek.co.il

## ITALY

Brüel & Kjær, Italia  
Via Trebbia 1  
20090 Opera MI  
Tel: +39 02 5768061  
Fax: +39 02 57604524  
E-mail: info@spectris.it

## JAPAN

Matsushita Inter-Techno Co.,  
Ltd.  
Pola 3rd Gotanda Building  
9-5 Nishi-Gotanda 8-chome  
Shinagawa-ku  
Tokyo 141  
Tel: +81 3 37798672  
Fax: +81 3 37798690  
E-mail: nvh\_cs@tky.mtc.co.jp

## KOREA

Brüel & Kjær Korea Ltd.  
18th floor, Kangnam Build-  
ing, 1321-1  
Seocho-dong, Seocho-gu  
Seoul 137-070  
Tel: +82 2 34730605  
Fax: +82 2 34740605  
E-mail: webmas-  
ter@bkscv.co.kr

## KUWAIT

Majlan Trading Co. W.L.L.  
P.O. Box 5722  
13058 Safat  
Tel: +965 2410316, 2434903  
Fax: +965 2434903  
E-mail: majlan1@ncc.moc.kw

## LATVIA

Miervaldis Lacis  
Imantas iela 31-23  
LV-1067 Riga  
Tel: +371 7 612675  
Fax: +371 7 603353

## LITHUANIA

Nerumas Ltd.  
P.O. Box 490  
Kaunas 2  
3002  
Tel: +370 7 204455  
Fax: +370 7 740585

## MALAYSIA

S&V Teknik Sdn. Bhd.  
No. 27, Jalan Nilam 1/2  
Subang Hitech Industrial  
Park  
Batu 3, 40400 Shah Alam  
Tel: +60 3 7372979  
Fax: +60 3 7328 931  
E-mail: svteknik@tm.net.my

## MALTA

ITEC  
B'Kara Road  
San Gwann  
Tel: +356 21 374300, 374329  
Fax: +356 21 374353  
E-mail: sales@itec.com.mt

## MAURITIUS

M. Muthen  
P.O. Box Reduit  
Tel: +230 4331763  
Fax: +230 4334553

## NEGARA BRUNEI DARUS- SALAM

Kosi Brunei Sdn. Bhd.  
No. 4 2nd Floor Bangunan  
Dewi Jaya  
Jalan Gadung Spg. 80  
Bandar Seri  
Bandar 3180  
Tel: +673 2 451820  
Fax: +673 2 451623



**NETHERLANDS**

Spectris Benelux B.V.  
Plesmanstraat 62 Postbus  
412  
Postbus 412  
NL-3900 AK Veenendaal  
Tel: +31 318 559290  
Fax: +31 318 559299  
E-mail: info@bk-bnl.nl

**NEW ZEALAND**

Reid Technology Ltd.  
3/5 Auburn Street, Takapuna  
P.O. Box 33-1690 Takapuna  
Auckland 1332  
Tel: +64 9 4898100  
Fax: +64 9 4898585  
E-mail: reidtechnolo-  
gy@xtra.co.nz

**NIGERIA**

Supra Investments Limited  
11B Karimu Kotun Street  
P.O. Box 73077, Victoria Is-  
land  
Lagos  
Tel: +234 1 610112, 618942  
Fax: +234 1 2623098  
E-mail: supra@cyber-  
space.net.ng

**NORWAY**

Brüel & Kjær Norge AS  
Torvveien 9  
N-1383 Asker  
Postboks 80, N-1371 Asker  
Tel: +47 66 771155  
Fax: +47 66 771150  
E-mail: akustikk@bksv.no

**PAKISTAN**

Mushko Electronics Pvt. Lim-  
ited  
Oosman Chambers  
Abdullah Haroon Road  
Karachi 74400  
Tel: +92 21 5660490  
Fax: +92 21 5660801  
E-mail: mushko@mush-  
ko.com

**PARAGUAY**

Eberhard Lewkowicz S.r.l.  
Paraguari No. 935  
Casilla de Correos 523  
Asunción  
Tel: +595 21 444400  
Fax: +595 21 444436/37  
E-mail: elewkowicz@uni-  
net.com.py

**PERU**

Miguel Piaggio Henderson  
Los Flamencos No. 145-Of.  
206  
San Isidro - Lima  
Tel: +51 1 4416441  
Fax: +51 1 4416441

**PHILIPPINES**

IMS Industrie Electronic  
Industries Inc.  
Tito Jovy Building No. 2  
Buencamino St Alabang  
Muntinlupa Metro Manila  
Tel: +63 2 8420716 8  
Fax: +63 2 8508801  
E-mail: pei@mozcom.com

**POLAND**

Spectris Polska Sp. z o.o.  
ul. Goraszewska 12  
PL-02-910 Warszawa  
Tel: +48 22 8589392  
Fax: +48 22 8588221  
E-mail: spectris@bruel.com.pl

**PORTUGAL**

Spectris Portugal-Sensores e  
Sistemas, Lda  
Rua Alfredo da Silva 8,  
Bloco B, Piso 1  
Alfragide, 2720-028 Amado-  
ra  
Tel: +351 1 4711453  
Fax: +351 1 4712952  
E-mail: support@spectris.pt

**QATAR**

Darwish Trading Co.  
Kassem Darwish Building  
P.O. Box 92  
Doha  
Tel: +974 4422781  
Fax: +974 4426378  
E-mail: dtcmain@qa-  
tar.net.qa

**ROMANIA**

Afico S.A.  
32 Ion URDAREANU Street  
Sector 5 - Bucharest  
Tel./Fax: +40 1 4115128  
Tel./Fax: +40 1 4116073  
E-mail: afico@pcnet.ro

**RUSSIA**

ASM Test & Measurement  
Petrovsko-Razumovsky  
Proezd, 29  
103287 Moscow  
Tel: +7 095 2123903,  
2123922, 4247598  
Fax: +7 095 7339048  
E-mail: info@asmtm.dol.ru

**SAUDI ARABIA**

Contracting Int'l & Market-  
ing Est.  
Sitteen Road, Near Prince  
Abdullah Palace  
P.O. Box 8552  
Jeddah 21492  
Tel: +966 2 6670644  
Fax: +966 2 6657716  
E-mail: CIAM@SPS.NET.SA

**SAUDI ARABIA**

A. Rajab & A. Silsilah & Co.  
Palestine Street,  
Opp. Solaiman Fakeeh Hos-  
pital  
P.O. Box 203  
Jeddah 21411  
Tel: +966 2 6610006  
Fax: +966 2 6610558  
E-mail: r\_s\_tm@anet.net.sa

**SLOVENIA**

IMS Industrijski merilni  
sistemi d.o.o.  
C. Ljubljanske brigade 23a  
SI-1000 Ljubljana  
Tel: +386 1 500 09 30  
Fax: +386 1 500 09 38  
E-mail: ims@siol.net

**SLOVAK REPUBLIC**

Brüel & Kjær s.r.o.  
Hlavatého 3  
811 03 Bratislava  
Tel: +421 2 54430701  
Fax: +421 2 54430692  
E-mail: bkptir@internet.sk

**SOUTH AFRICA**

A&V Technologies cc  
419 Vine Avenue  
Ferndale 2194  
(P.O. Box 1669, Ferndale  
2160)  
Tel: +27 11 8868005  
Fax: +27 11 8868040

**SPAIN**

Brüel & Kjær Div. of Spectris  
España S.A.  
C/ Teide, 5  
28700 San Sebastian de los  
Reyes, Madrid  
Tel: +34 91 6590820  
Fax: +34 91 6590824  
E-mail: bruelkjær@bkes.com

**SWEDEN**

Brüel&Kjær Sound & Vibra-  
tion Measurement A/S  
Göteborgsvägen 99  
SE-504 60 BORÅS  
Tel: +46 33 22 56 22  
Fax: +46 33 12 31 40  
E-mail: info@bksv.se <mail-  
to:info@bksv.se>

**SINGAPORE**

Brüel&Kjær  
(South Asia Pacific Pte Ltd)  
460 Alexandra Road  
# 34-04A PSA Building  
Singapore 119963  
Tel: +65 3774512  
Fax: +65 3774502  
E-mail: vanessa.sv@pacif-  
ic.net.sg

**SRI LANKA**

Laboratory Equipment Com-  
pany  
P.O. Box 1014  
Third Floor, YMBA Building  
Colombo 1  
Tel: +94 1 320257  
Fax: +94 1 343009  
E-mail: labequ@sltnet.lk

**SYRIA**

ARTEC  
Rokneddine, Mafrak  
Shakko Bldg.  
P.O. Box 7457  
Damascus  
Tel: +963 11 2770181  
Fax: +963 11 2761040  
E-mail: artect@dm.net.lb

**SWITZERLAND**

Brüel & Kjær Messtechnik  
GmbH  
Glattalstrasse 529  
8153 Rümlang-Letten  
Tel: +41 1 8807035  
Fax: +41 1 8807039  
E-mail: info@bkmt.ch

**TAIWAN, ROC**

Brüel & Kjær, Taiwan Co.,  
Ltd.  
Room 1503, 13F-2, No. 142  
Sec. 3, Min Chuan East Road  
Taipei  
Tel: +886 22 7139303  
Fax: +886 22 7195030  
E-mail: spechen@ms11.hi-  
net.net

**THAILAND**

MEASURETRONIX LTD.  
2102/31-32 Ramkamhaeng  
Road Huamark, Bangkok  
Bangkok 10240  
Tel: +66 2 3752733,  
Fax: +66 2 3749965,  
E-mail: supot@measuretron-  
ix.com

**TRINIDAD, WEST INDIES**

Plant Engineers Limited  
#173 Eastern Main Road  
Tunapuna  
Tel: +1 868 6626128,  
Fax: +1 868 6623713

**TUNISIA**

PROLEC  
19, rue Jaafar El Barmaki  
1082 Mutuelleville  
Tunis  
Tel: +216 71 797177, 792190  
Fax: +216 71 794106,  
E-mail: proelec@planet.tn

**TURKEY**

PRO-PLAN  
Yeni Krizantem Sok. 78  
Ic Levent 80620  
Istanbul  
Tel: +90 212 2682574,  
2799522  
Fax: +90 212 2646507  
E-mail: proplan@prop-  
lan.com.tr

**UK**

Brüel & Kjær UK Ltd.  
Bedford House  
Rutherford Close, Stevenage  
Hertfordshire  
Tel: +44 1438 739 000  
Fax: +44 1438 739 099  
E-mail: info@bkgb.co.uk

**UKRAINE**

Tecon Ltd.  
14, Janvaskogo Vastaniy  
Street  
Flat 43  
252010 Kiev - 10  
Tel: +380 44 2914911,  
2542939  
Fax: +380 44 2907332,  
2542939  
E-mail: tecon@ukrsat.com

**URUGUAY**

Coasin Instrumentos S.A.  
Obligado 1263  
11300 Montevideo  
Tel: +598 2 7085266  
Fax: +598 2 7090988

**USA**

Brüel & Kjær North America  
Inc. (HQ)  
2815-A Colonnades Court  
Norcross, Georgia  
30071-1588  
Tel: +1 770 209 6907  
Fax: +1 770 448 3246  
E-mail: bkinfo@bksv.com

**VENEZUELA**

Coasin C.A.  
Calle 9 con Calle 4  
Edif. Edinurbi, Piso 3,  
Apartado de Correos 70.136  
Los Ruices, Caracas 1070A  
Tel: +58 212 2410309,  
2411845  
Fax: +58 212 2411939

**VIETNAM, S.R.**

EAC Trading Ltd., A/S  
27 Ly Thai To Street #002  
Hanoi  
Tel: +84 4 8260550  
Fax: +84 4 8260266

**YUGOSLAVIA**

Mr. Djordje Radojevic  
Gandijeva 55A / 21  
YU-11070 Novi Beograd  
Tel. & Fax: +381 11 158752  
E-mail: raddor@eunet.yu


**ZIMBABWE**

Ames Engineering Ltd.  
6 Josiah Chinamano Road  
P.O. Box 8002  
Belmont  
Bulawayo  
Tel: +263 9 540021  
Fax: +263 9 540031  
E-mail: ames@internet.co.zw



38



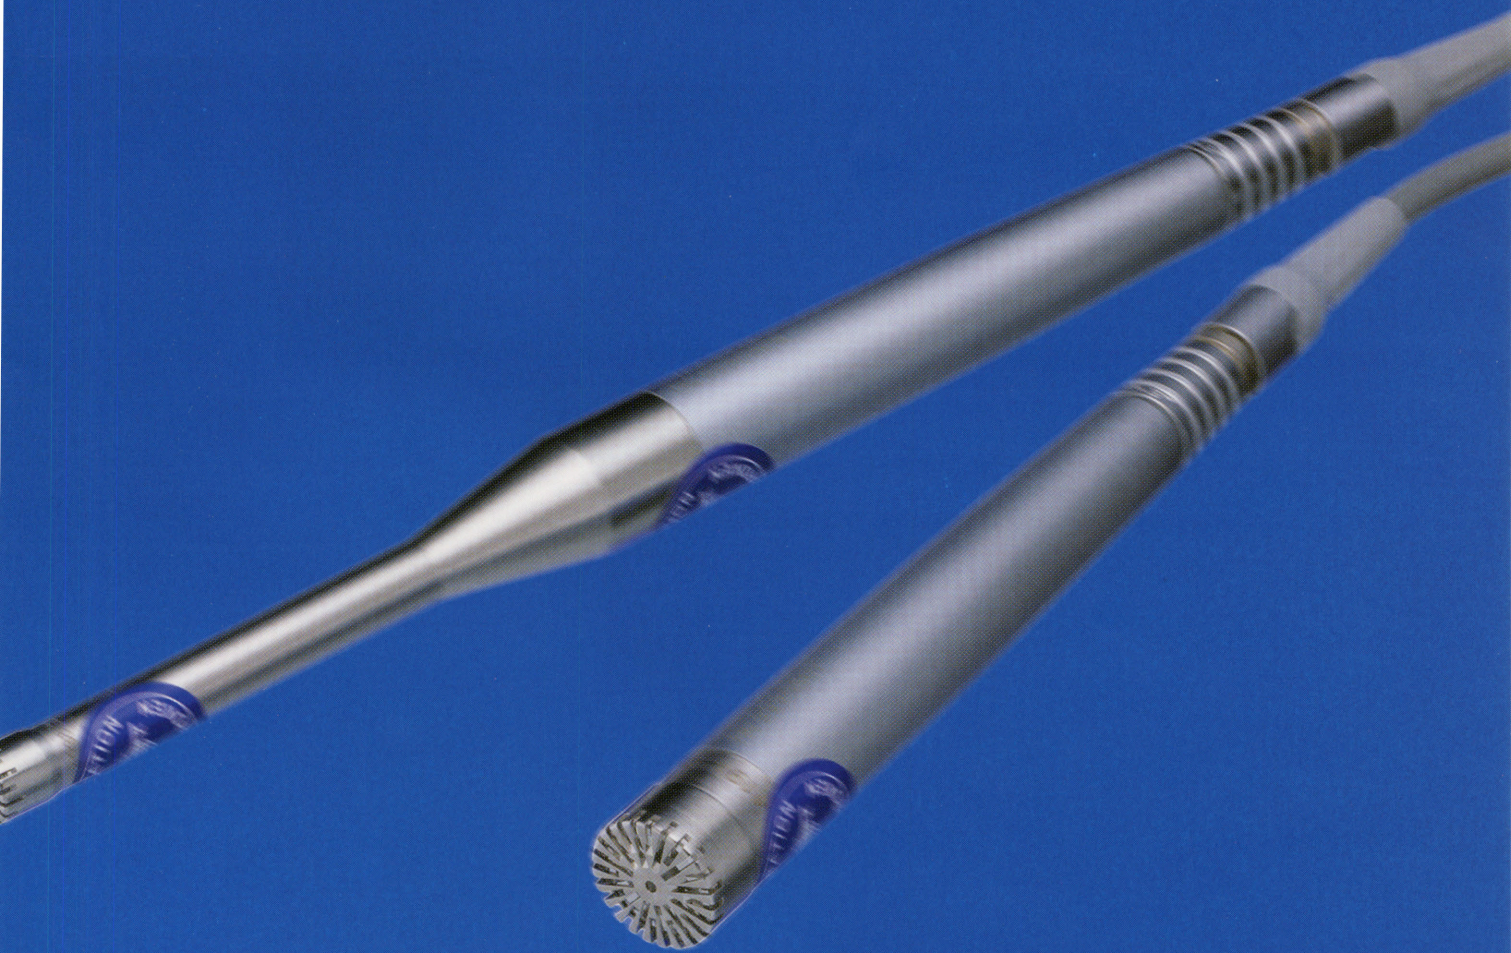



## Literature

We offer a comprehensive range of high-quality literature that includes User Manuals, Product Data Sheets, Brochures, Application Notes, Bulletins and Brüel & Kjær Magazine.

This Microphones & Conditioning Catalogue is the first in a new range of product catalogues. They will cover PULSE Analyzer Solutions, Environmental Solutions and Accelerometers, and will be available during 2003.

## Service and Support

To ensure that you receive the full benefit of our equipment, Brüel & Kjær offers worldwide service and support including accredited calibration, on-site traceable calibration, installation, software maintenance and upgrade contracts, product training, and application courses.

## [www.bksv.com](http://www.bksv.com)

Visit our homepage for all the latest information, and for an on-line version of this catalogue.

